

NFRC 100-2026^[E0A1]

Procedure for Determining
Fenestration Product U-factors

An American National Standard

©2026 National Fenestration Rating
Council, Inc.

Prepared by:

National Fenestration Rating Council

6305 Ivy Lane, Suite 410

Greenbelt, MD 20770

P: 301-589-1776

F: 301-589-3884

E: info@nfrc.org

W: www.nfrc.org





FOREWORD

The National Fenestration Rating Council, Incorporated (NFRC) has developed and operates a uniform rating system for energy and energy-related performance of fenestration products. The Rating System determines the U-factor, Solar Heat Gain Coefficient (SHGC) and Visible Transmittance (VT) of a product, which are mandatory ratings for labeling NFRC certified products, are mandatory ratings for inclusion on label certificates, and are supplemented by procedures for voluntary ratings of products for Air Leakage (AL), and Condensation Resistance. Together, these rating procedures, as set forth in documents published by NFRC, are known as the NFRC Rating System.

The NFRC Rating System employs computer simulation and physical testing by NFRC-accredited laboratories to establish energy and related performance ratings for fenestration product types. The NFRC Rating System is reinforced by a certification program under which NFRC-licensed responsible parties claiming NFRC product certification shall label and certify fenestration products to indicate those energy and related performance ratings, provided the ratings are authorized for certification by an NFRC-licensed certification and Inspection Agency (IA).

The requirements of the rating, certification, and labeling program (Certification Program) are set forth in the most recent versions of the following as amended, updated, or interpreted from time to time:

- NFRC 700 Product Certification Program (PCP).
- NFRC 705 Component Modeling Approach (CMA), Product Certification Program (CMA-PCP).

Through the Certification Program and the most recent versions of its companion programs as amended, updated, or interpreted from time to time:

- The laboratory accreditation program (Accreditation Program), as set forth in the NFRC 701 Laboratory Accreditation Program (LAP).
- The IA licensing program (IA Program), as set forth in NFRC 702 Certification Agency Program (CAP).
- The CMA Approved Calculation Entity (ACE) licensing program (ACE Program), as set forth in the NFRC 708 Calculation Entity Approval Program (CEAP).

NFRC intends to ensure the integrity and uniformity of NFRC ratings, certification, and labeling by ensuring that responsible parties, testing and simulation laboratories, and IAs adhere to strict NFRC requirements.

In order to participate in the Certification Program, a Manufacturer/Responsible Party shall rate a product whose energy and energy-related performance characteristics are to be certified in accordance with mandatory NFRC rating procedures. At present, a Manufacturer/Responsible Party may elect to rate products for U-factor, SHGC, VT, AL, Condensation Resistance, or any other procedure adopted by NFRC, and to include those ratings on the NFRC temporary label affixed to its products, or on the NFRC Label Certificate. U-factor, SHGC and VT, AL, and Condensation Resistance rating reports shall be obtained from a laboratory that has been accredited by NFRC in accordance with the requirements of the NFRC 701.

The rating shall then be reviewed by an IA which has been licensed by NFRC in accordance with the requirements of the NFRC 702. NFRC-licensed IAs also review label format and content, conduct in-plant inspections for quality assurance in accordance with the requirements of the NFRC 702, and issue a product Certification Authorization Report (CAR), or approve for issuance an NFRC Label Certificate for site-built or CMA products and attachment products. The IA is also responsible for the investigation of potential violations (prohibited activities) as set forth in the NFRC 7007 Compliance and Monitoring Program (CAMP).

Ratings for products that are labeled with the NFRC Temporary and Permanent Label, or products that are listed on an NFRC Label Certificate in accordance with NFRC requirements, are considered to be NFRC-certified. NFRC maintains a Certified Products Directory (CPD), listing product lines and individual products selected by the manufacturer/responsible party for which certification authorization has been granted.

NFRC manages the Rating System and regulates the Product Certification Program (PCP), Laboratory Accreditation Program (LAP) and Certification Agency Program (CAP) in accordance with the NFRC 700 (PCP), the NFRC 701 (LAP), the NFRC 702 (CAP), the NFRC 705 (CMA-PCP), and the NFRC 708 (CEAP) procedures, and conducts compliance activities under all these programs as well as the NFRC 7007 (CAMP). NFRC continues to develop the Rating System and each of the programs.

NFRC owns all rights in and to each of the NFRC 700, NFRC 701, NFRC 702, NFRC 705, NFRC 7007, NFRC 708 and each procedure, which is a component of the Rating System, as well as each of its registration marks, trade names, and other intellectual property.

The structure of the NFRC program and relationships among participants are shown in Figure 1, Figure 2, and Figure 3. For additional information on the roles of the IAs and laboratories and operation of the IA Program and Accreditation Program, see the NFRC 700 (PCP), NFRC 701 (LAP), and NFRC 702 (CAP) respectively.

Figure 1

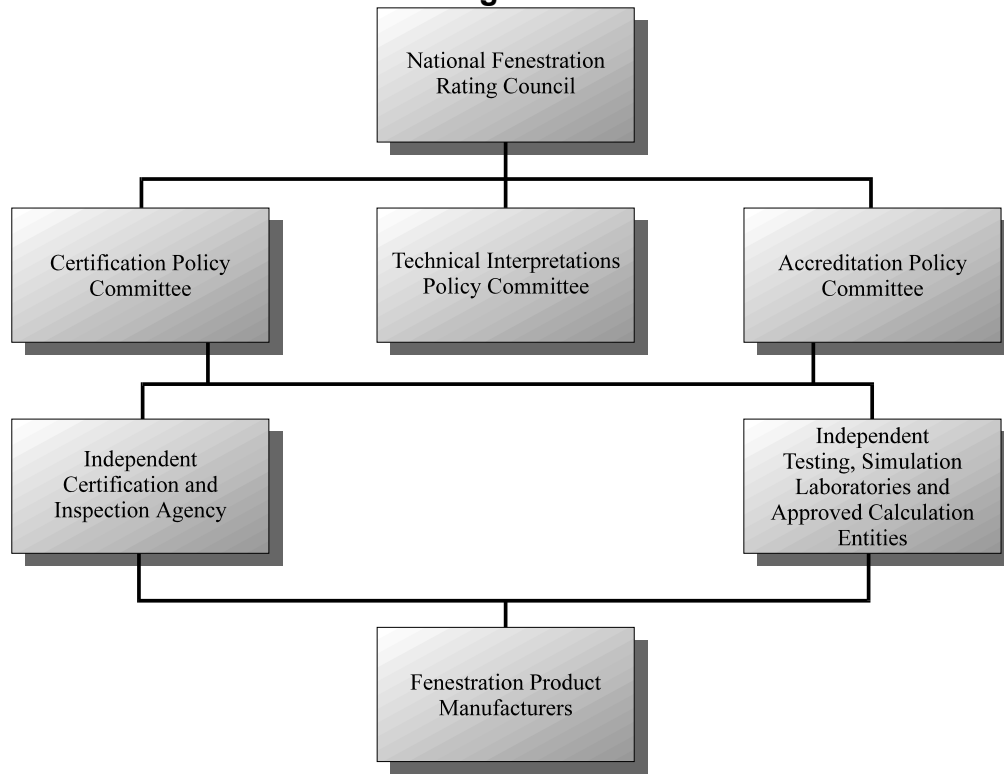


Figure 2


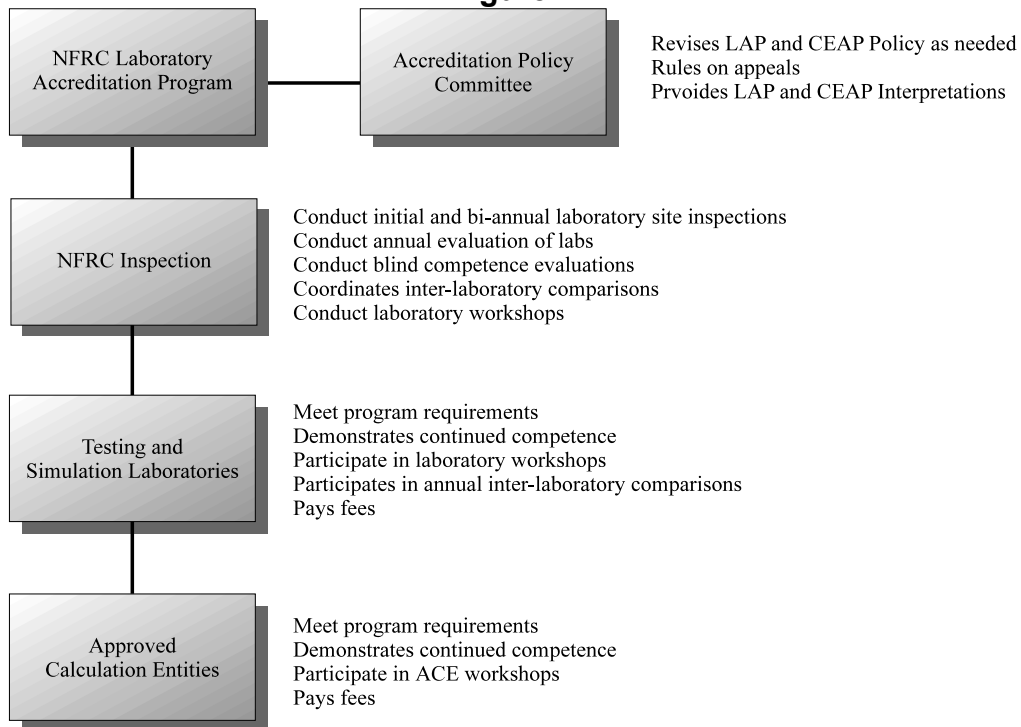


Figure 3

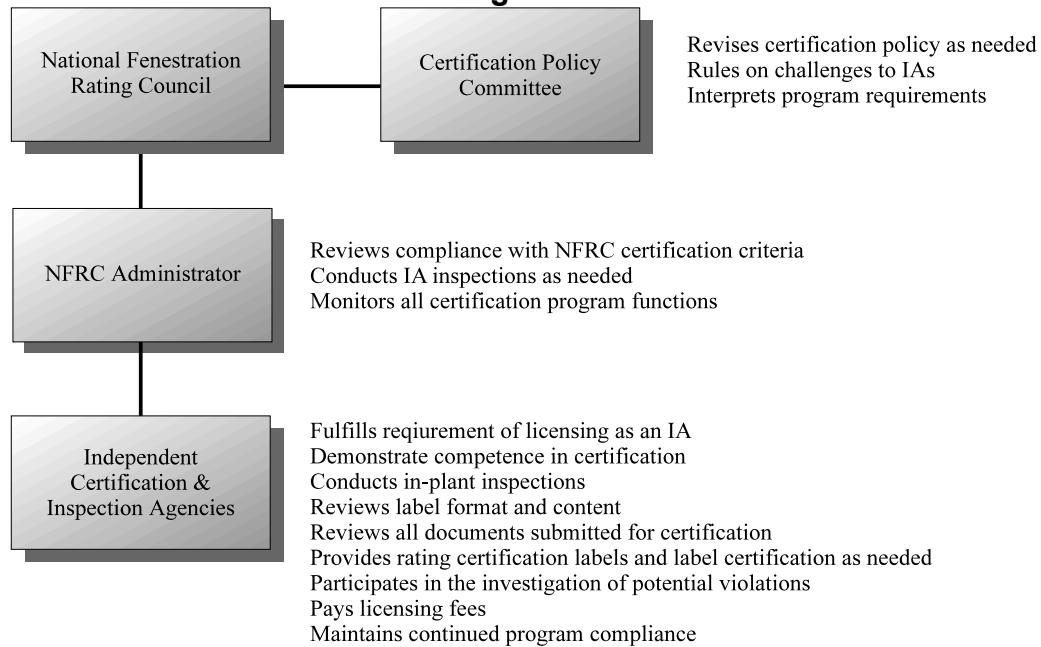

Questions on the use of this procedure should be addressed to:

National Fenestration Rating Council

6305 Ivy Lane, Suite 410
Greenbelt, MD 20770
Voice: (301) 589-1776
Fax: (301) 589-3884
Email: info@nfr.org
Website: www.nfr.org



DISCLAIMER

NFRC certification is the authorized act of a Manufacturer/Responsible Party in: (a) labeling a fenestration or related attachment product with an NFRC Permanent Label and NFRC Temporary Label, or (b) generating a site built or CMA label certificate, either of which bears one or more energy performance ratings reported by NFRC-accredited simulation and testing laboratories and authorized for certification by an NFRC-licensed IA. Each of these participants acts independently to report, authorize certification, and certify the energy-related ratings of fenestration and related attachment products.

NFRC does not certify a product and certification does not constitute a warranty of NFRC regarding any characteristic of a fenestration or fenestration-related attachment product. Certification is not an endorsement of or recommendation for any product or product line or any attribute of a product or product line. NFRC is not a merchant in the business of selling fenestration products or fenestration-related products, and therefore cannot warrant products as to their merchantability or fitness for a particular use.

NFRC THEREFORE DISCLAIMS ANY AND ALL LIABILITY THAT MAY ARISE FROM OR IN CONNECTION WITH SERVICES PROVIDED BY, DECISIONS MADE BY OR REPORTS OR CERTIFICATIONS ISSUED OR GRANTED BY ANY NFRC-ACCREDITED LABORATORY, NFRC-LICENSED IA OR ANY PRODUCT MANUFACTURER/ RESPONSIBLE PARTY; RELIANCE ON ANY NFRC PRODUCT DESCRIPTION, SPECIFICATION, RATING, TEST OR CERTIFICATION, WHETHER APPEARING IN A REPORT, A PRODUCT CERTIFICATION AUTHORIZATION OR A PRINTED OR ELECTRONIC DIRECTORY, OR ON A LABEL, OR ON A LABEL CERTIFICATE; OR THE SALE OR USE OF ANY NFRC-RATED OR CERTIFIED PRODUCT OR PRODUCT LINE; INCLUDING BUT NOT LIMITED TO DAMAGES FOR PERSONAL OR OTHER INJURY, LOST PROFITS, LOST SAVINGS OR OTHER CONSEQUENTIAL OR INCIDENTAL DAMAGES.

NFRC program participants are required to indemnify NFRC from and against such liability.

This standard is maintained by the Continuous Maintenance Process.

Approval of ANSI / NFRC 100 as an American National Standard is maintained using the continuous maintenance process. Comments or proposals for revisions on any part of this standard may be submitted to the National Fenestration Rating Council at any time. Written comments or proposals must be in writing and be submitted to the NFRC Accredited Standards Developer at standards@nfrc.org.

Any written comments or proposals submitted to NFRC as provided above shall be submitted by NFRC to its consensus body for consideration within a reasonable timeframe not to exceed one year. The submitter will be notified by NFRC of the expected time frame for consideration of the proposal or comments. NFRC shall apply for reaffirmation of this standard regardless of any comment or proposals every three years.



Table of Contents

Foreword	i
Disclaimer.....	v
Table of Contents.....	vii
1. Purpose.....	1
2. Scope	1
2.1 PRODUCTS AND EFFECTS COVERED.....	1
2.2 PRODUCTS AND EFFECTS NOT COVERED	2
3. Definitions.....	2
4. General.....	20
4.1 COMPLIANCE	20
4.1.1 Product Line Simulation and Testing	20
4.1.2 Testing Alternative	21
4.1.3 Custom Product Rating.....	21
4.1.4 Dynamic Glazing Product Rating	22
Table 4-1 Standardized Slat Stacked Height.....	23
4.2 PRODUCT LINES AND INDIVIDUAL PRODUCTS.....	23
4.2.1 Product Lines.....	23
4.2.2 Individual Products	26
4.2.3 Validation Test Matrix	27
4.2.3.1 Same Product Type	27
4.2.3.2 Multi-Purpose Products.....	28
4.2.4 Grouping of Products.....	29
4.2.4.1 Center-of-Glazing Grouping.....	29
4.2.4.2 Shading Systems between Glazing Layers Grouping.....	31
4.2.4.3 Frame/Sash Grouping.....	32
4.2.4.4 Spacer Grouping.....	33
4.2.4.5 Sightline Grouping	33
4.2.5 General Simulation Rules	34
4.2.6 General Testing Rules	35

4.2.7	General Rating Rules	36
4.2.8	Additions to the Product Line	36
4.3	STANDARD CONDITIONS	36
4.3.1	Simulation	37
	NFRC Simulation Conditions:	38
	Table 4-2 – Boundary Conditions	40
4.3.2	Testing	40
4.3.2.1	Total Fenestration Product Test Procedure	40
4.3.2.2	Center-of-Glazing Component Test Procedure	41
4.3.2.3	Component Substitution	41
4.4	MODEL SIZES AND CONFIGURATIONS	42
	Table 4-3 – Product Types and Model Sizes	42
4.5	SIMULATION PROCEDURES	43
4.5.1	Total Fenestration Product U-factors for Model Sizes	43
4.5.2	Total Fenestration Product	43
4.5.3	Component	44
4.5.3.1	Approved Center-of-Glazing Simulation Programs ...	44
4.5.3.2	Approved 2-D Heat Transfer Simulation Programs ...	44
4.6	TEST PROCEDURES	44
4.6.1	Total Fenestration Product	45
4.6.2	Component	45
4.6.2.1	Glazing Component Test Procedure	45
4.6.3	Calculation Procedure	46
4.6.4	Reporting of Ratings	47
4.7	VALIDATION	47
4.7.1	Equivalence	47
	Table 4-4 -- Equivalence	47
4.8	FIGURES	48
	Figure 4-1 – Fenestration Product Schematic – Vertical Elevation....	48
	Figure 4-2 – Fenestration Product Schematic – Vertical Section	49
	Figure 4-3 – Divider Height and Divider Width	50
	Figure 4-4 – Sightline Examples.....	51
5.	Variations from the General Requirements	52
5.1	WINDOWS AND SLIDING GLASS DOORS	52
5.1.1	Scope	52
5.1.2	Variations from Standard Product Lines	52
5.1.3	Variations from Standard Individual Products	52
5.1.4	Variations from Standard Simulation and Test Conditions.....	52
5.1.5	Calculation of Total Product Rating	52
5.1.6	Figures.....	53
5.2	SIDE-HINGED EXTERIOR DOORS AND SIDELITES.....	53
5.2.1	Scope	53
5.2.1.1	Simplified Door Rating (SDR) Method.....	53
5.2.1.2	Detailed Door Rating (DDR) Method.....	54
5.2.2	Variations from Standard Product Lines	54

5.2.3	Variations from Standard Individual Products	55
5.2.4	Variations from Standard Simulation and Test Conditions	55
5.2.5	Calculation of Total Product Rating	58
5.2.5.1	Simplified Door Rating (SDR) Method	58
5.2.5.2	Modeling using the Detailed Door Rating (DDR) Method	60
5.2.6	Baseline Product	61
	Table 5-1 – Glazing and Divider Patterns for Doors	62
5.2.7	Figures	63
	Figure 5-1a – Exterior Steel/Composite Door System – Vertical Elevation in Steel Frame	63
	Figure 5-1b – Exterior Steel/Composite Door System – Vertical Elevation in Wood Frame	64
	Figure 5-2 – Exterior Wood Door System – Vertical Elevation	65
	Figure 5-3 – Typical 6-Panel Layout	66
	Figure 5-4 – Common Pressed-Steel Frame – Single Unit Type Pressed-Steel Frame	66
	Figure 5-5 – Frame Cross Section	67
	Pressed Steel Frame Specification	67
	Figure 5-6 – Wood Default	68
	Figure 5-7 – Default Wood Door Head Jamb and Side Jamb	68
	Figure 5-8a – Default Thermally Broken Aluminum Door Sill	69
	Figure 5-8b – Default Non-Thermal Door Sill	70
	Figure 5-9 – Default Door Lite Frame	70
	Figure 5-10 – SDR Configurations of Single Door or Sidelights	71
	Figure 5-11 – Commercial Door Example in a Glazed Wall System ..	72
	Figure 5-12 – Door Inside Glazed Wall System	73
	Figure 5-13 – Door Inside Glazed Wall System	74
5.3	SKYLIGHTS	75
5.3.1	Scope	75
5.3.2	Variations from Standard Product Lines	75
5.3.3	Variations from Standard Individual Products	75
5.3.4	Variations from Standard Simulation and Test Conditions	75
5.3.5	Calculation of Total Product Rating	75
5.3.6	Figures	75
5.4	TUBULAR DAYLIGHTING DEVICES (TDD)	75
5.4.1	Scope	75
5.4.2	Variations from Standard Product Lines	76
5.4.3	Variations from Standard Individual Products	76
5.4.4	Variations from Standard Simulation and Test Conditions	76

5.4.4.1	Orientation	76
5.4.4.1.1	Insulation at Ceiling Configuration.....	76
5.4.4.1.2	Insulation at Roof Configuration	76
5.4.4.2	Sizes	76
5.4.4.3	Tubular Daylighting Device Area.....	77
5.4.4.4	Standard Testing Conditions.....	77
5.4.4.4.1	Insulation at Ceiling Configuration.....	77
5.4.4.4.2	Insulation at Roof Configuration	77
5.4.4.5	Calculation of Total Product Rating.....	78
5.4.5	Figures.....	78
	Figure 5-14a – Tubular Daylighting Device Product Schematic – Vertical Elevation	78
	Figure 5-14b – Hybrid Tubular Daylighting Device Product Schematic – Vertical Elevation	78
5.5	VEHICULAR ACCESS (GARAGE) DOORS	79
5.5.1	Scope	79
5.5.2	Variations from Standard Product Lines	79
5.5.3	Variations from Standard Individual Products	79
5.5.4	Variations from Standard Simulation and Test Conditions.....	79
5.5.5	Total Product Rating	80
5.5.6	Figures.....	82
	Figure 5-15 – Garage Door U-factor Area Weighting, Sectional.....	82
	Figure 5-16 – Garage Door U-factor Area Weighting, Front Elevation View	83
	Figure 5-17 – Garage Door Front Elevation View and Perimeter Details	84
5.6	NON-RESIDENTIAL PRODUCTS	85
5.6.1	Scope	85
5.6.1.1	Products and Systems Covered.....	85
5.6.2	Variations from Standard Product Lines	85
5.6.3	Variations from Standard Individual Products	85
5.6.4	Variations from Standard Simulation and Test Conditions.....	86
5.6.4.1	Rating Configuration for Glazed Wall and Sloped Glazing Systems	86
5.6.4.2	Unspecified Product Sample Validation Criteria.....	86
5.6.4.3	Determining the Thermal Transmittance for Solarium/Sunroom Systems.....	87
5.6.5	Calculation of Total Product Rating	88
5.6.6	Figures.....	88
5.7	DYNAMIC ATTACHMENT FOR SWINGING DOOR PRODUCTS (DASD)	88
5.7.1	Scope	88
5.7.2	Methodology	88
5.7.3	Approved Computational Program.....	89
	Table 5-2 – Reference Swinging Doors.....	89
5.7.4	Figures.....	90
	Figure 5-18 – Reference Swinging Door Details	90

	Figure 5-19 – Reference Swinging Door Details	91
5.8	ROLLING DOORS.....	92
5.8.1	Scope	92
5.8.2	Variations from Standard Product Lines	92
5.8.3	Variations from Standard Individual Products.....	92
5.8.4	Variations from Standard Simulation and Test Conditions.....	92
5.8.5	Total Product Rating	93
5.8.6	Figures.....	95
	Figure 5-20 – Rolling Door U-factor Area Weighting - Sectional View	95
	Figure 5-21 – Rolling Door U-factor Area Weighting – Front Elevation View	95
	Figure 5-22 – Rolling Door Front Elevation View and Perimeter Details	96
5.9	COMPONENT MODELING APPROACH (CMA) FOR NON-RESIDENTIAL PRODUCTS	97
5.9.1	Scope	97
5.9.2	Products and Systems Covered	97
5.9.3	Standard Simulation and Testing.....	97
5.9.3.1	Simulation	97
5.9.3.1.1	Definition of the Low and High (L/H) Options	97
5.9.3.1.2	Reporting Simulation Results	97
5.9.3.1.3	Total Product U-factor Calculation.....	97
5.9.3.2	Testing	97
5.9.4	Validation Testing	97
5.9.5	Simplifications.....	97
5.9.5.1	Simplifications to Spacer Components.....	97
Table 5-4	– Generic Sealant and Desiccant Material Values	97
5.9.5.2	Simplifications to Frame Component	97
Table 5-5	– Frame Group Leader for all Metallic, Aluminum, Thermally- Improved Aluminum, and Thermally-Broken Aluminum Frames..	97
Table 5-6	– Frame Group Leader for Vinyl, Fiberglass, and Composite Frames	97
Table 5-7	– Frame Group Leader for Wood Frames (either with or without Cladding).....	97
5.9.5.3	Modification of Approved Framing Components and Addition of New Framing Components.....	97
5.9.6	Total Product Rating	97

5.9.6.1	Reporting of Ratings	97
5.9.6.2	Determining Thermal Transmittance (U-factor) for Sloped Glazing Systems	97
5.9.6.3	Complex Product Rating	97
5.9.6.3.1	Spandrel Panel System	97
5.9.6.3.2	Combination Products	97
5.9.6.3.3	Composite Products	97
5.10	APPLIED FILMS	97
5.10.1	Scope	97
5.10.2	Variations from Standard Product Lines	97
5.10.3	Variations from Standard Individual Products	97
5.10.4	Variations from Standard Simulation and Test Conditions	97
5.10.4.1	Approved Center-of-Glazing Computational Program	97
5.10.5	Calculation of Total Product Rating	98
5.10.5.1	Reference Fenestration Products	98
	Figure 5-23 – Residential Fixed Window Reference Product	99
	Figure 5-24 – Non-Residential Window-Wall Reference Product	100
5.10.5.2	Total Fenestration Product U-factor	102
	Table 5-8 – Center-of-Glazing Values U_c	102
5.10.6	Testing	103
5.10.6.1	Center-of-Glazing Component Test Procedure	103
5.10.6.2	Total Fenestration Product Test Procedure	103
5.11	TRENDLINE APPROACH	104
5.11.1	Scope	104
5.11.2	Products and Systems Covered	104
5.11.3	Variations from Standard Product Lines	104
5.11.4	Variations from Standard Simulation and Test Conditions	104
5.11.4.1	Trendlines	104
5.11.4.1.1	Categorizing Product Options for a Trendline	105
5.11.4.1.2	Establishing Trendline Endpoints	105
5.11.4.1.3	Development of a Trendline	106
5.11.5	Total Fenestration Product U-factor Rating	107
5.11.6	Validation	107
5.11.7	Adding Individual Product Options to Existing Trendlines	107
5.12	COMMERCIAL TRENDLINE APPROACH	108
5.12.1	Scope	108
5.12.2	Products and Systems Covered	108
5.12.3	Variations from Standard Product Lines	108
5.12.4	Commercial Trendlines	108
5.12.5	Standard Simulation	108
5.12.5.1	Categorizing Product Options for a Trendline	109
5.12.5.2	Establishing Trendline U_{cog} Points	109
5.12.5.3	Development of a Trendline	110
5.12.6	Default and Specific Spacer Systems	111

5.12.6.1 Default Spacer System	112
Table 5-10 – Default Spacer System Performance	112
5.12.6.2 Specific Spacer Systems	113
5.12.7 Total Fenestration Product U-factor Rating	114
5.12.7.1 U-Factor Range Determination	114
5.12.7.2 Total U-factor (U_{tot}).....	114
5.12.8 Reporting Simulation Results.....	115
5.12.9 Validation Testing	115
5.12.10 Calculating Individual Product Options to Existing Trendlines	116
6. References	117
Appendix A (Non-Mandatory Information).....	119
A.1 DETERMINATION OF SKYLIGHT U-FACTORS AT NON-STANDARD SLOPES .	119
Table A-2: Convective Surface Heat Transfer Coefficients, h_c , in for Skylights at Different Incidence Angles ($W/m^2 \cdot ^\circ K$).....	119
Table A-3: Convective Surface Heat Transfer Coefficients, h_c , in for Skylights at Different Incidence Angles ($Btu/h^2 \cdot ft^2 \cdot ^\circ F$).....	120
Table A-4: Skylight U-factors Slope Table (Example Only)	120
A.2 DETERMINATION OF U-FACTORS FOR DYNAMIC GLAZING PRODUCTS AT ADDITIONAL SLAT ANGLES	121
A.3 DETERMINATION OF U-FACTOR AT SPECIFIED SIZES USING ASPECT RATIO CALCULATION	121
Index	127

1. PURPOSE

To specify a method of determining fenestration product U-factor (thermal transmittance).

2. SCOPE

2.1 Products and Effects Covered

The following products and effects are within the scope of ANSI/NFRC 100 and shall be permitted to be rated in accordance with this procedure.

- A. Products of all types as defined in Table 4-3;
- B. Products of all frame materials, including (but not limited to) aluminum, steel, thermally broken aluminum, wood, vinyl, reinforced vinyl, fiberglass, and plastic, used singularly or in combination, or products utilizing foam as a core material;
- C. Products of all glazing materials, tints, and types, including (but not limited to) clear glass, tinted glass, laminated glass (diffuse or specular), stained glass, fritted glazing, etched glazing, sandblasted glazing, glass block, silicone coated glazing, thin plastic films (internally suspended, internally applied, or externally applied, diffuse or specular), rigid plastics (diffuse or specular), and translucent fiberglass with or without any solar control, low-E, or any other partially transparent coating, and products with manufactured decorative opaque insulated glazing panels, designed for interchangeability with other glazing options;
- D. Products with any or no gap width between glazing layers;
- E. Products with any spacer or spacer system between glazings, including (but not limited to) metallic, non-metallic, or composite spacers;
- F. Products utilizing any and all glazing dividers, including (but not limited to) interior, exterior or between glazing grilles, muntin bars, true divided lites, or simulated divided lites;
- G. Products with any gas-fill between glazing layers, including (but not limited to) air, argon, krypton, or mixes of these gases;
- H. Products utilizing shading systems, diffusing systems, or dynamic glazing that are an integral part of the product as shipped from the manufacturer;

- I. Vacuum insulating glass (VIG); and
- J. Dynamic Attachment for Swinging Doors.

2.2 Products and Effects Not Covered

The following products and effects are beyond the scope of ANSI/NFRC 100 and shall not be rated in accordance with this procedure.

- A. Fenestration products with shading and/or diffusing systems other than those listed in Section 2.1;
- B. Thermal performance changes of a fenestration product over the course of time, i.e., long-term energy performance;
- C. Issues related to water tightness, structural capacity, and air leakage;
- D. Pet doors; and
- E. Permanently attached louvers.

3. DEFINITIONS

Air Leakage, AL:

The volume of air flowing per unit time per unit area through a fenestration system due to air pressure or temperature difference between the outdoor and indoor environment.

Architectural Skylight Systems:

A multiple-lite glazed system used as a roofing element, with glazing at a slope greater than 30° from the vertical plane, excluding unit skylights and roof windows. This category encompasses all types of skylights including but not limited to: Single Pitch Skylight, Single Pitch Skylight with Vertical Ends, Double Pitch Ridge Skylight, Double Pitch Ridge Skylight with Vertical Ends, Double Pitch Ridge Skylight with Hipped Ends, Pyramid Skylight, Polygonal Skylight, Continuous Vaulted Skylight and Continuous Vaulted Skylight with Vertical End Walls. These products shall be rated as sloped glazing products.

Areas:

Center of glazing Area (A_c):

All glazing areas except those within 63.5 mm (2.5 in) of any part of a primary sash, and/or frame, and/or divider; or any part of a primary door, and/or frame, and/or divider. See Figures 4-1, 4-2, 5-11, 5-12, 5-13, 5-14, 5-15, 5-19, and 5-20.

Divider Area (A_d):

The projected area in the plane(s) parallel to the fenestration product's glazing of all interior or exterior applied non-removable dividers, true dividers, and simulated dividers or between glazing dividers. See Figures 4-1 and 4-2.

Door Core Area (A_{dc}):

The projected area of the door less the frame, edge-of-frame, lite glazing frame, edge-of-glazing, center-of-glazing, edge-of-divider, divider, edge-of-panel and panel areas. See Figures 4-3, 5-1, 5-2, 5-11, 5-12, 5-13, 5-16, 5-17, and 5-18.

Edge-of-divider Area (A_{de}):

All glazed vision areas within 63.5 mm (2.5 in) of any part of a divider area. The edge-of-divider area shall exclude any edge-of-glazing area. See Figures 4-1 and 4-2.

Edge-of-glazing Area (A_{eg}):

All glazed vision areas within 63.5 mm (2.5 in) of any part of the frame and sash or of the door lite frame sight line, excluding any divider or edge of divider. See Figures 4-1, 4-2, 5-11, 5-12.

Edge-of-panel Area (A_{ep}):

The projected area extending from the point 25 mm (1 in) of uniform thickness on the panel, to the point which includes 25 mm (1 in) of door core material from the interface of any decorative bead or from the interface of the panel cutout and the door core. See Figures 4-3, 5-1, 5-2, 5-11, 5-12.

End Stile Area (A_{es}):

The projected area of the end stile in the plane(s) parallel to the garage door surface. See Figures 5-11, 5-12, 5-17.

Frame Area (A_f):

The projected area of frame and sash in the plane(s) parallel to the glazing surface, except for doors, which shall include the projected areas of the door jambs, header, threshold, door bottom sweep and the peripheral structural elements of the door slab, in a plane parallel to the door core surface. See Figures 4-1, 4-2, 5-1, 5-2, 5-11, 5-16, 5-17, 5-19, and 5-20.

Exterior Door System Area:

The total door system that includes all frame, lite frame, divider, edge-of-divider, edge-of-glazing, center-of-glazing, door core, edge-of-panel, and panel areas; the door, slab, or slab door together with the surrounding frame, weatherstrip, sill, and sweep.

Lite Frame Area (A_{lf}):

Specific to doors, the projected area extending from the sight line of the lite frame into the surrounding homogeneous door core surface for a distance of 25 mm (1 in) beyond the outer edge of the lite frame and parallel to the door core surface. See Figures 5-11 and 5-12.

Panel Area (A_p):

The projected area of all decorative panels of uniform thickness and extending from a point 25 mm (1 in) of uniform thickness, in a plane parallel to the door core surface. See Figures 4-1, 4-2, 5-1, 5-2, 5-11, and 5-12.

Projected Fenestration Product Area (A_{pf}):

The area of the rough opening in the wall or roof, for the fenestration product, less installation clearance.

Note: Where a fenestration product has glazed surfaces facing in only one direction (typical products), the sum of the edge-of-divider area, the edge-of-glazing area, the divider area, the center-of-glazing area, and the frame area will equal the total projected fenestration product area (A_{pf}). Where a fenestration product has glazed surfaces in more than one direction (e.g., greenhouse/garden, bay/bow windows) the sum of the areas will exceed the projected fenestration product area.

Total Fenestration Product Area (A):

The area of the total fenestration product that includes all frame, divider, edge-of-glazing, edge-of-divider, and center-of-glazing areas.

Awning Window:

A window with one (or more) sash that rotates about its top hinge and projects outward.

Base Profile:

Primary structural member of a fenestration product line which forms the basis for comparison, such as groupings.

Baseline Product:

Within a product line, the individual product selected for validation testing. To verify door glazing and lite frame simulations, the baseline product for door, sidelite, and garage (vehicular access) door product lines which include glazed options, shall include glazing.

Basement Window:

A window usually with one sash that projects inward and is intended to be used at or below grade; rated as the appropriate product type.

Bay Window:

A combination assembly which is composed of two or more individual windows joined side by side and which projects away from the wall on which it is installed. Center windows, if used, are parallel to the wall on which the bay is installed. The two side windows are angled with respect to the center window(s). Common angles are 30° and 45°, although other angles are sometimes employed. Individual windows are rated as the appropriate product type.

Bead:

(1) A strip used around the periphery of the glazing to secure it in a frame or sash (also referred to as a “stop”); (2) S strip of sealant, such as caulking or glazing compound.

Blackbody:

A perfect emitter and absorber of thermal radiation. A blackbody emits radiant energy at each wavelength at the maximum rate possible as a consequence of its temperature and absorbs all incident radiant flux.

Bow Window:

A rounded bay window that projects from a wall in the shape of an arc. Individual windows rated as the appropriate product type.

Breather/Capillary Tube:

A tube providing an intentional breach of the IG seals to allow for pressure equalization.

Caming:

Material that divides and holds pieces of glazing together to form a single decorative glazing panel.

Casement Window:

A window containing one (or more) sash, hinged to open from the side, that projects outward or inward from the plane of the window in a vertical plane. A conventional casement window has a sash that projects outward.

Certification:

The affixing by a licensed Responsible Party of an NFRC label on a fenestration product, or on a box/package containing an attachment product, or the distribution of an NFRC Label Certificate for which Certification Authorization has been granted.

Certified Simulator:

Any individual that has attended at least one NFRC-sanctioned Simulation Training Workshop, completed and satisfactorily passed all necessary examinations, participated

in NFRC simulation round robins, and is approved by NFRC to use at least one NFRC-approved simulation software tool.

Cladding:

An applied rigid or semi-rigid roll-formed or extruded covering that is placed over or is attached to and follows the contour of the interior or exterior framing member for the primary purpose of protection from environmental elements and/or aesthetics. Cladding adds no structural integrity to the framing member.

Combination Assembly:

An assembly formed by a combination of two or more separate fenestration.

Composite Assembly (Unit):

A window, door, or skylight unit consisting of two or more sash, leaves, lites, or sliding door panels within a single frame utilizing an integral mullion. (Not to be confused with products made from composite materials.)

Commercial Fenestration:

Fenestration typically installed in commercial building, but not limited to commercial building application.

Commercial Trendline Approach (CTA):

A trendline methodology used for rating Commercial Fenestration,

Computer Simulation:

The process by which a product is analyzed for energy performance characteristics utilizing NFRC-approved computer software and manufacturer supplied product specifications and drawings, in accordance with the requirements of the NFRC Rating System.

Convective Film Coefficient (h):

The time rate of convection heat transfer from a unit area of a surface to its surroundings, induced by a unit temperature difference between the surface and the environment.

Curb:

A wall or frame used to raise roof windows, skylights, or sloped glazing above the surface of the roof.

Curtain Wall:

A non-load-bearing exterior wall, comprised of multiple fenestration elements, with vertical framing members which are designed to run past the face of the floor slabs, which is secured to and supported by the structural members of the building.

Daylight Opening Size:

The glazing infill dimension measured from the glazing sightline, also known as the vision area.

Decorative Panel/Panel Insert:

A decorative raised molding that is inserted into a cut-out in an insulated door slab. Decorative panels are typically molded from a composite material. The gap between the two halves of the panel may be filled with an insulating material.

Detailed Door Rating (DDR) Method:

A modeling procedure that combines opaque Door or Sidelite slab simulations with various glass simulations projected into the opaque unit(s) to determine a total product U-factor.

Diffuse (adj.):

Referring to radiometric quantities, indicates that flux propagates in many directions, as opposed to a direct beam, which refers to quasi-collimated flux from the sun, whose angular diameter is approximately 0.5° . When referring to reflectance, it is the directional hemispherical reflectance less the specular reflectance. Diffuse has been used in the past to refer to hemispherical collection (including the specular component). This use is deprecated in favor of the more precise term hemispherical.

Diffuser:

A translucent glazing layer or fenestration product accessory designed to transmit direct-beam radiation diffusely, i.e. many directions.

Divider:

Any vertical or horizontal bar used to separate glazing into multiple lites or placed in the gap between sheets of glazing. Dividers may be external or internal, may be removable or non-removable, and may be real (true) or simulated. Dividers may also be called grids, grilles, or muntins.

Doorglass Assembly Area (DGAA):

Sum of the Lite-Frame-Area (A_{lf}), Edge-of-Glazing Area (A_{eg}), Center-of-Glazing Area (A_c), Edge-of-Divider-Area (A_{ed}), Divider Area (A_d)

Slab:

For an operable door or sidelite system, the swinging portion of the system, whose primary function is to allow human egress/ingress or ventilation. A slab may also be included as part of a non-operable door or sidelite system. Sometimes referred to as a leaf in the industry.

Composite (material) Slab:

A door manufactured from skins molded from plastics, fiberglass compounds, compressed composites, or other non-metallic materials. The door slab may or may not incorporate a structural perimeter constructed from materials, including (but not limited to) wood, wood products, composites, or other reinforcing materials. The core of the door slab may be filled with materials including, but not limited to insulating polyurethanes, styrenes, or honeycombs.

Steel Door:

A door manufactured from steel skins, which may be coated with paint, plastic, wood veneers, or other finishes. The door leaf may or may not incorporate a structural perimeter, including (but not limited to) materials of wood, wood products, composites, or other reinforcing materials. The core of the door leaf may be hollow or filled with material, including (but not limited to) insulating polyurethanes, styrenes, or honeycombs.

Wood Slab:

A door manufactured from solid wood, wood veneers, wood laminates, or a combination thereof. Such doors are generally assembled from stiles, rails, and raised panels, but may also be wood flush doors of solid or hollow core construction.

Aluminum Slab:

A door manufactured from aluminum extrusions for the vertical stiles and horizontal rails with glazed panel area. Aluminum doors may also be flush doors manufactured with aluminum skins (exterior and interior sides) applied over the aluminum stiles and rails with an insulating core.

Door Panel:

The portion of a sliding glass door or exterior bi-fold door that is installed in a frame and includes the glazing, stiles, and rails. A panel may be operable or non-operable.

Dual Action Window:

A window that operates in two different ways. Typically, the window consists of a sash that tilts from the top and swings inward from the side.

Dynamic Attachment:

Any Fenestration Attachment that incorporates Dynamic Glazing.

Dynamic Glazing Product:

Any Fenestration Product that incorporates Dynamic Glazing.

Embossed/Raised Panel:

Decorative areas on a door slab. On a steel door these may be pressed into the steel skin or achieved by the application of plastics or other trim materials. On composite (material) doors these are usually molded into the door skin or may be achieved by the use of surface applied trim. Wood doors usually incorporate thinner wood sections assembled into the stiles and rails. [Note: See Figure 5-3 for typical 6-panel layout.]

Emissivity (ϵ):

The relative ability of a surface to reflect or emit heat by radiation. Emissivity ranges from 0.00 to 1.00 (Blackbody emissivity is 1.0).

Energy Panel:

A glazed Fenestration Attachment designed to be mounted to the interior or exterior of a primary fenestration product such that a gap is created between the glazing systems of the attachment and the primary fenestration product. This includes, but is not limited to, storm windows, storm doors, and storm panels. Also see “Fenestration Attachment.”

Exterior Bi-Fold Doors (aka Folding Walls, Bi-Fold Glass Wall System):

A door with two or more panels, typically fully-glazed, where each panel folds on top of the adjacent panel to open. These are classified as Side-Hinged Exterior Door and shall be rated and tested as either single or double door products.

Exterior Bi-Fold Window

A window with two or more sash where each sash folds on top of the adjacent sash to open. This window operator type shall be rated and tested as a Double Casement.

Film:

Fenestration attachment products that consist of a flexible adhesive-backed polymer film which may be applied to the interior or exterior surface of an existing glazing system. See Fenestration Attachment.

Finish:

The final treatment or coating of a surface.

Fixed Window:

A window designed to be non-operable.

Frame:

The enclosing structure of a window, door, or skylight which fits into the wall or roof opening and receives either, glazing, sash, or vents.

Fully CLOSED Position:

The orientation or condition of a Dynamic Glazing Product with a shading system, or a shade/blind fenestration attachment product, that allows the minimum Visible Transmittance (VT) within the design limitations of the product.

Fully OFF Position:

The orientation or condition of a Dynamic Glazing Product, such as chromogenic glazing, where the glazing is de-energized, de-activated, or otherwise “OFF.”

Fully ON Position:

The orientation or condition of a Dynamic Glazing Product, such as chromogenic glazing, where the glazing is energized, activated, or otherwise “ON.”

Fully OPEN Position:

The orientation or condition of a Dynamic Glazing Product with a shading system, or a shade/blind fenestration attachment product, that allows the maximum Visible Transmittance (VT) within the design limitations of the product.

Gap Width:

The distance between two adjacent glazing surfaces.

Gas-fill:

The process of adding a gas between glazing panes. Term typically used to indicate gases other than air, such as argon and krypton.

Glass:

An inorganic, amorphous substance, usually transparent, composed of silica (sand), soda (sodium carbonate), and lime (calcium carbonate) with small quantities of other materials.

Glazed Wall:

A collective term used to describe any system which meets the definition of curtain wall or window wall.

Glazing System/Glazing In-fill:

A generic term used to describe an in-fill material, such as glass, plastic, or other transparent or translucent material, or assembly of glazing material, spacer, and desiccant, used to enclose openings in a building created by a specific framing system.

Glazing System:

The assembly of the glazing, spacer, and desiccant combined to be placed in the opening in a window, skylight, door, or sidelite.

Greenhouse/Garden Window:

A window unit that consists of a three-dimensional, five-sided structure generally protruding from the wall in which it is installed. Operable sash may or may not be included.

Grid(s):

See “Divider.”

Group Leader:

The single option defined as representing all other options in that group for purposes of grouping.

Grouping:

The process of reducing the number of individual options by selecting the worst performing option as representative.

Horizontal Sliding Window:

A window that contains one or more operable sash(es) that slide horizontally within a common frame. Operable sash (X) and a non-operable sash/lite (O) comprising a unit is termed a single slider (XO or OX). When two operable sashes are separated by a non-operable sash/lite, the unit is termed a picture slide (XOX) or end vent. When an operable sash separates two non-operable sash/lites, the unit is termed a center slide (OXO). When two bi-parting sashes are located at the center of the unit with the non-operable sash/lites at each end, the unit is termed a bi-part center slide (OXXO). When adjacent sashes bypass one another, the unit is termed a double slide (XX or XXO) or a double slide and vent (XXX).

Hybrid Tubular Daylighting Device (HTDD):

The HTDD category has been retired and all products have been placed in the TDD category.

Individual Product:

Any one specific fenestration product within a product line, specific to weather seals, glazing method, hardware, operable/non-operable configurations, ventilators, weep systems, and sills.

Inset Mount:

Where the frame of the skylight extends below the roof's deck and into the rough opening.

Insulating Glass Unit (IGU), Sealed Insulating Glass Unit:

A preassembled unit comprising lites of glass, which are sealed at the edges and separated by dehydrated space(s). The unit is normally used for windows, window walls, picture windows, sliding doors, patio doors, or other types of fenestration.

Label:

Permanent and/or temporary marker or device applied to a fenestration product, listing rating information and indicating compliance with certification requirements.

Label Certificate:

A document used in lieu of an NFRC Temporary Label specific to certain products that have received certification authorization (see NFRC 705).

Lite:

Another term for glazing used in a fenestration product. Frequently spelled “lite” in industry literature to avoid confusion with “light,” as in “visible light.”

Low-E Coating:

Microscopically thin metal, metal oxide, or multilayer coating deposited on a glazing surface to reduce its thermal infrared emittance.

Model Size:

The size listed in Table 4-3 that is used to rate a fenestration product.

Mullion:

A structural member connecting two or more products. Mullions may be of the following types:

Combination Mullion:

A member formed by joining two or more individual fenestration products together with or without an additional reinforcing member (mullion stiffener).

Integral Mullion:

A member bound at both ends by crossing frame members.

Mullion Stiffener:

An additional reinforcing member used in a reinforcing mullion. Mullion stiffeners may be designed to carry the total load or may share the load with the adjacent framing members.

Reinforcing Mullion:

A member with an added continuous mullion stiffener joining two or more individual fenestration products along the sides of the mullion stiffener.

Nail Flange, Nailing Fin:

An extension of a fenestration product frame that generally laps over the conventional stud construction and through which fasteners are used to secure the frame in place.

Obscure Glazing:

Glazing layer that fully or partially obscures or distorts the image through the layer. Including but not limited to acid-etched, imaged, fritted, silicone coated, embossed, patterned, textured, wired, and stained glass. Also included are products with privacy applied films and light-scattering interlayers.

Opaque In-fill Systems:

Fenestration systems that include opaque elements. See "Spandrel."

Outdoor Air Ventilator Assembly (OAVA):

A device, other than a sash unit, for the purpose of controlling the passage of air through a fenestration product. An OAVA shall not allow outside air access to cavities within the cross-sectional boundaries of the sash, frame, or glazing.

Pivoted Window:

A window with a horizontal or vertical pivot axis that is fixed in place within the frame and the sash travel traverses both the interior and exterior planes of the frame during operation.

Pivot Door:

A single door with a pivot axis that is fixed in place within the frame and with a door slab that traverses both the interior and exterior planes of the frame during operation. See "Side-Hinged Exterior Door" as operator type.

Product Line:

A series of individual fenestration products of the same operator type manufactured from the same profiles. Individual variations such as glazing, spacer, or small variations in frame profiles are considered individual products within product lines.

Product Type:

A designation used to distinguish between fenestration products based on non-operable and operable sash and frame members. [Note: Referred to as operator type in previous versions.]

Radiation:

The transfer of heat in the form of electromagnetic waves or photons from one body to another.

Rating:

Performance values obtained using NFRC-approved procedures used for comparative purposes only (i.e., U-factor, SHGC, VT, etc.).

Rating System:

A system that consists of NFRC simulation and test procedures for determining comparative fenestration product energy performance characteristics, as supported by the Certification Program.

Reference Fenestration Product:

The fenestration product that an attachment is combined with for the purposes of rating. A reference fenestration product comprises a reference glazing system and a reference frame with a specified construction.

Reference Frame:

The frame of the reference fenestration product. This may or may not correspond to an actual frame type available commercially.

Reference Glazing System:

The glazing system in the reference fenestration product.

Representative Size:

The actual size of a specimen used for validation testing.

Roof Mount:

Where the frame of the skylight is directly mounted on top of the roof deck with or without a curb, manufacturer supplied, or site fabricated.

Roof Window:

See "Unit Skylight/Roof Window."

Rough Opening:

The framed opening in a wall or roof where a fenestration product is to be installed.

Sash:

The portion of a fenestration assembly that is installed in a frame and includes the glazing, stiles, and rails. A sash may be operable or non-operable.

Sealant:

A flexible material placed between two or more parts of a structure, with adhesion to the joining surfaces, to prevent the passage of certain elements such as air, moisture, water, dust, and other matter.

Side-Hinged Exterior Door: A non-operable and/or operable exterior door system. An operable door system shall have at a minimum, a slab and a frame, and hinge attachment of any type between a slab and jamb, mullion, or edge of another slab (e.g. bi-fold doors) or shall have a single, fixed vertical axis (swinging/pivoted) about which the slab rotates between open and closed positions. A non-operable door system shall have at a minimum a slab and a frame.

Shading System:

A device that is integral to a fenestration system or integral to a glazing system which has the fully reversible ability to affect the Solar Heat Gain Coefficient (SHGC) or the Visible Transmittance (VT) of the fenestration system or glazing system.

Sidelite

A fenestration product that is used as a companion product installed on one or both sides of a door system. Sidelites may consist of a glazed frame, sash or slab within a frame.

Sightline:

The line formed by the highest opaque member (frame, sash, spacer, divider, or shading system) that is interior, exterior, or within the glazing system cavity of the fenestration cross-section and the glazing in a plane perpendicular to the surface. A change in sightline will result in a change in the projected frame dimension (PFD) between frame cross-sectional profiles of individual products within a product line (see Figure 4-4).

Simplified Door Rating (SDR) Method:

A modeling procedure allowing component simulations to be conducted by separate entities and re-assembled by an authorized end-user to calculate a total U-factor. Component U-factor and corresponding areas are determined for up to four size configurations of doorglass assemblies and up to five panel/door core/frame-sill configurations for each glass option.

Simulation Software:

Any computer software used for Computer Simulation.

Site-Built Products:

Fenestration products that are designed to be field glazed or field assembled and are comprised of specified framing and glazing components.

Skylight:

See “Unit Skylight/Roof Window”

Sliding Glass Door:

Sliding glass doors contain one or more operable panels that slide horizontally within a common frame. Operable panel (X) and a non-operable lite/panel (O) comprising a unit is termed a single slider (XO or OX). When two operable panels are separated by a non-operable lite/panel, the unit is termed a picture slide (XOX) or end vent. When an operable panel separates two non-operable lites/panels, the unit is termed a center slide (OXO). When two bi-parting panels are located at the center of the unit with the non-operable lites/panels at each end, the unit is termed a bi-part center slide (OXXO). When adjacent panels by-pass one another, the unit is termed a double slide (XX or XXO) or a double slide and end vent (XXX).

Sloped Glazing:

A multiple-lite glazed system (similar to a curtain wall) that is mounted at a slope greater than 30° from the vertical plane, excluding unit skylights and roof windows.

Spandrel Panel System:

A non-vision application of a fenestration product; typically used to hide or obscure features of the building structure or used for visual effect. A spandrel panel system consists of an exterior exposed glazing layer with an interior insulated opaque panel.

Spectral (adj):

Indicating that the property or quantity was evaluated at a specific wavelength (λ), within a small wavelength interval ($\Delta\lambda$ about λ). Usually indicated by placing the wavelength symbol λ , as a subscript following the symbol for the quantity, as with E_λ , thereby indicating that the flux-related quantity is a concentration of flux at the indicated wavelength, or it may be placed inside parentheses following the symbol for the material property, as with $\alpha(\lambda)$. It is permissible to indicate the wavelength dependence of a flux quantity as follows: $E_\lambda(\lambda)$.

Specified Size:

The specified product size used when installed into the building envelope opening.

Structurally Glazed Framing:

A method of glazing where framing members are generally not exposed to the exterior (i.e., two-sided or four-sided structural glazed).

Sunroom/Solarium:

A glazed envelope system that has one wall (or a portion thereof) that opens to a primary structure and remaining walls which may include a number of fenestration

systems, such as windows, doors, skylights, kneewalls, etc., in varying percentages per the design of the system.

Surface Heat Transfer Coefficient, Surface Conductance, Film Coefficient (h):

The time rate of heat flow between a surface and its surroundings per unit area and per unit temperature difference.

Thermal Break:

A material of low thermal conductivity that is inserted between members of high conductivity in order to reduce the heat transfer. Thermal barrier material conductivity shall not be more than 0.52 W/mK (3.60 Btu·in/h·ft²·°F).

Thermal Bridge:

A path of high thermal conductance from the exterior to interior surfaces of a system that has lower thermal conductance in all other areas. An example would be a metal fastener penetrating an insulating wall or thermally broken frame.

Thermal Opening Area:

The area of the TDD/HTDD product at the interior-most plane of the building's thermal envelope.

Thermally Broken Members (TB):

System members with a minimum of 5.30 mm (0.210 in) separation provided by a low conductance material (where thermal conductivity ≤ 0.5 W/mK, (≤ 3.6 Btu·in/h·ft²·°F)) or open-air space between the interior and exterior surfaces. Examples of such systems include (but are not limited to) pour and debridged urethane systems, crimped-in-place plastic isolator systems, and pressure glazed systems with intermittent fasteners.

Note: Intermittent fasteners shall be manufacturer's standard. Nominal spacing of fasteners shall be 150 mm (6 in) apart or greater.

Thermally Improved Members (TI):

System members with a separation ≥ 1.60 mm (0.062 in) separation provided by a material [where thermal conductivity ≤ 0.5 W/mK, (≤ 3.6 Btu·in/h·ft²·°F)] or open-air space between the interior and exterior surfaces. Such systems include members with exposed interior or exterior trim attached with clips and all skip/debridged systems.

Transom:

A non-operable fenestration product that is used as a companion product installed above another fenestration product. Transoms may consist of a glazed frame or a non-operable sash within a frame. A transom may be rated as either a fixed window or a transom at the discretion of the manufacturer. An operable transom product shall be rated as the appropriate operator type.

Tubular Daylighting Device (TDD):

A non-operable device primarily designed to transmit daylight from a roof surface to an interior ceiling surface via a tubular conduit. The device consists of an exterior glazed weathering surface, a light transmitting tube with a reflective inside surface and an interior sealing device, such as a translucent ceiling panel. See also “Hybrid Tubular Daylighting Device.”

U-factor, Thermal Transmittance (U):

The heat transfer per time per area and per degree of temperature difference. The U-factor multiplied by the interior-exterior temperature difference and by the projected fenestration product area yields the total heat transfer through the fenestration product due to conduction, convection, and long-wave infra-red radiation.

Center-of-glazing U-factor (U_c):

The U-factor representative of the center-of-glazing area.

Divider U-factor (U_d):

The U-factor representative of the divider area.

Door Core U-factor (U_{dc}):

The U-factor representative of the door core area.

Edge-of-divider U-factor (U_{de}):

The U-factor representative of the edge-of-divider area.

Edge-of-glazing U-factor (U_e):

The U-factor representative of the edge-of-glazing area.

Edge-of-panel U-factor (U_{ep}):

The U-factor representative of the edge-of-panel area.

End Stile U-factor (U_{es}):

The U-factor representative of the garage door end stile area.

Frame U-factor (U_f):

The U-factor representative of the frame and sash area.

Lite Frame U-factor (U_{lf}):

The U-factor representative of the lite frame area.

Panel U-factor (U_p):

The U-factor representative of the panel area.

Total Fenestration Product U-factor (U_t):

The U-factor representative of the total system.

Unit Skylight/Roof Window:

A window designed for sloped or horizontal application, the primary purpose of which is to provide daylighting and/or ventilation. Typically, the term “roof window” is not used for horizontal applications. This product can be either roof mounted or inset mounted.

Vacuum Insulating Glass (VIG): an assembly with an evacuated gap between glass lites which are sealed at the edges and separated by a pillar array or other system designed to maintain spacing between glass lites.

Validation Matrix:

Two or more product lines whose U-factor can be validated by a single test.

Vehicular Access (Garage Door):

A door that is used for vehicular traffic at entrances of buildings (such as garages, loading docks, parking lots, factories, and industrial plants) that is not generally used for pedestrian traffic. The garage door includes vertical jamb tracks, all divider, edge-of-divider, edge-of-glazing, center-of-glazing, door panel core, edge-of-panel, and stile (end cap) areas.

Vertical Sliding Window:

A window that contains at least one operable sash that slides vertically within a common frame. Operable sash (X) and a non-operable sash/lite (O) comprising a unit are called single hung windows and units with two operable sash (X/X) are called double hung windows.

Weatherstrip:

A flexible component used to reduce air leakage, water penetration, or both between the sash or panels and/or sash or panels and frame.

Window Wall:

A non-load-bearing fenestration system, comprised of multiple fenestration elements, with vertical framing members which are designed to span from the top of a floor slab to the underside of the next higher floor slab or roof. Also referred to as a “storefront”, “strip window” or “horizontal ribbon window system.”

4. GENERAL

4.1 Compliance

Fenestration product ratings shall be determined following the procedures outlined in Section 4.1.1, in accordance with the criteria specified in Sections 4.2 through 4.8, as modified by applicable portions of Section 5.

4.1.1 Product Line Simulation and Testing

- A. Determine the representative size matrix of U-factors. List all individual products and associated representative sizes (see Section 4.4) within a product line. The representative size matrix or list of U-factors for a product line is given as follows:

Representative Size Matrix of U-factors

Product ID List

U-factor for Model Size

Individual Product #1

Individual Product #2

Individual Product #XX

Individual Product #Last

- B. Compute the total fenestration product U-factor for the baseline product in the representative size matrix of U-factors. Using the approved total fenestration product U-factor calculation procedure (see Section 4.3.1), compute the U-factor for the baseline product (see Section 4.2.6).

Note: Compute as many U-factors in this representative size matrix as is necessary to definitely determine the baseline product.

- C. Test the baseline fenestration product using the approved total fenestration product U-factor test procedure in Section 4.3.2.1.
- D. Validation of the simulation procedure: if the simulated and tested U-factors for the baseline product are equivalent (as defined in Section 4.7.1), then the computational procedure presented in Section 4.3.1 shall be considered validated for all the products in the product line. The approved total fenestration product U-factor calculation procedure presented in Section 4.3.1 shall then be used to determine U-factors for the model size matrix of U-factors of Section 4.5.1. These are the values that shall be reported. If the simulated and tested U-factors for the baseline product are not equivalent (as defined in Section 4.7.1), then the alternative test procedure presented in Section

4.1.2 may be used for all products within the product line—with written permission from NFRC.

4.1.2 Testing Alternative

If an individual product listed in Section 2.1 cannot be simulated in accordance with Section 4.3.1, the test procedure found in Section 4.3.2.1 shall be used to determine the U-factors of the individual fenestration product(s) for the size defined in Table 4-3.

Currently the following products cannot be simulated:

- A. Non-planar products including but not limited to:
 - i. Greenhouse/garden windows
 - ii. Tubular daylighting devices
 - iii. Domed skylights without frames or flashing
- B. Complex glazed products other than the following:
 - i. Vertical products with between-glass venetian blinds
 - ii. Products with outdoor woven shades
 - iii. Products with fritted glazing

The test specimen size shall be the size with the lowest deviation determined from Equation 4-2. If the test specimen cannot be fabricated at the Table 4-3 size, the tested U-factor shall be adjusted to the model size using the following, unless other provisions for specific products have been made in ANSI/NFRC 100:

$$U_{mod} = \frac{(U_{rep}A_{rep})}{A_{mod}}$$

Equation 4-1

Where:

- U_{mod} = U-factor at model size
- U_{rep} = U-factor at representative size (test size)
- A_{rep} = Area at representative size
- A_{mod} = Area of model size

4.1.3 Custom Product Rating

A custom product is an NFRC individual product which meets all of the following criteria:

- A. A custom product shall be composed of unique frame/sash components not covered within an existing standard product line's U-factor matrix;
- B. The specific configuration of a custom product shall not be offered publicly in a manufacturer's catalog or similar literature; and
- C. Fewer than 500 units shall be produced annually or shall be produced as part of one purchase order.

U-factors for custom products (which meet the criteria above) may be represented by U-factor ratings generated for a similar stock individual product made of the same product type and materials. A simulation analysis from an NFRC-certified simulator employed by an NFRC-accredited simulation laboratory, confirming that the custom product's U-factor is equal to or lower than the stock product, shall be provided to the NFRC or NFRC's designated representative.

4.1.4 Dynamic Glazing Product Rating

Products meeting the definition of a Dynamic Glazing Product shall be rated at their Fully ON/CLOSED and Fully OFF/OPEN Positions. A manufacturer does not have to model dynamic glazing products in both positions. If only one position is modeled, it shall be the Fully OFF/OPEN position. The manufacturer shall specify the appropriate procedure to achieve the stated positions. Rating procedures for these positions shall be the same as for non-Dynamic Glazing Products, as outlined in Section 4.1.1 or Section 4.1.2 as appropriate.

When rating Dynamic Glazing Products with slatted blinds between glass in the Fully OFF/OPEN position, the standardized slat stack heights of Table 4-1 shall be used.

Table 4-1 Standardized Slat Stacked Height

Product Types Covered	Product Overall Height	Blind Stack Height (Dim A)	
	mm	mm	in
Windows			
Awning, Door Transom	600	20	0.8
Vertical Slider	1500	27	1.1
Horizontal Slider	1200	45	1.8
Fixed, Casement, Dual Action	1500	57	2.2
Sliding Glass Doors			
Sliding Glass Doors	2000	77	3.0
Swinging Door and Door Sidelites Typical overall height of door is 2090mm			
Swinging Doors and Door Sidelites	Typical Door Lite IG Height	Blind Stack Height (Dim A)	
	mm (in)	mm	in
¼ Lite (Doors Only)	457 (18)	19	0.7
½ Lite	889 (35)	36	1.4
¾ Lite	1194 (47)	48	1.9
Full Lite	1600 (63)	65	2.6

4.2 Product Lines and Individual Products

U-factors shall be determined for all individual products within a product line, except as allowed in Section 4.2.4. All product lines shall be simulated separately.

4.2.1 Product Lines

A product line is a series of fenestration products of the same product type (as listed in Table 4-3) manufactured from the same profiles and components. The following changes are the only allowable exceptions within a product line:

- A. Overall fenestration product size;
- B. Center-of-glazing and edge-of-glazing characteristics such as glazing types and thicknesses, glazing coatings, tints and obscurity, gas-fills, gap widths, shading systems between glazing layers, dividers, and spacers;

- C. Operable/non-operable configurations, as defined in Table 4-3;
 - i. Product types defined as operable that have a non-operable version (Casement-Single, Dual-Action, Pivoted (Horizontal Axis), Pivoted (Vertical Axis) and Projecting/Awning-Single) may be included in the same product line, at the manufacturer's discretion, as long as the changes to render the product non-operable comply with Section 4.2. If there is no operable version of the product, it shall be classified as a Fixed Window.
 - ii. Product types defined as either operable or non-operable (Greenhouse/Garden, Skylight/Roof Window) may be included in the same product line, at the manufacturer's discretion, as long as the changes to render the product non-operable comply with Section 4.2. If the changes do not comply with Section 4.2, the product shall be treated as two separate product lines.
- D. Changes to accommodate glazing unit variations, limited to changes of geometry, number, or material type to stops, beads, adhesives, or gaskets designed to retain the glazing. Changes to frame and sash profiles are allowed to accommodate glazing unit variations. This provision does not allow for interior and exterior glazed products to be in the same product line;
- E. Frame/sash modifications made to accommodate operating hardware and reinforcement for the purpose of addressing higher/lower loads and stresses: limited to changes that do not change the exterior perimeter shape of the assembled cross section;

NOTE: "Exterior perimeter" is defined as the perimeter of the entire assembled cross-section (Interior, Adiabatic, and Exterior boundaries of the frame and sash).
- F. Frame or sash changes where one component is replaced by another component of the same physical shape with a thermal conductivity that does not differ by more than 10 times the thermal conductivity of the original material;
- G. Products with and without cladding can be incorporated into one product line, provided that the only changes made to the unclad product are notches or grooves to accommodate the cladding, or removal of the frame/sash material up to the depth of the cladding;

- H. Changes to the frame/sash profiles to allow for different installations, limited to the following:
 - i. Any changes to interior/exterior appendages added to the main web of the frame that are removable or not exposed after product installation, i.e., nailing fins,
 - ii. Changes in the width (dimension perpendicular to the plane of the glazing) of the main frame or main frame components to allow for installation in different wall thicknesses, i.e., lengthening, shortening, and the addition of extruded or pultruded walls within a hollow cavity (web walls),
 - iii. Door products manufactured in both in-swing and out-swing options when only the frame is modified. This section only applies to side-hinged exterior door products. Any other products with inswing/outswing options (e.g. operable casements) shall be separate product lines.
 - iv. Any changes to the exterior beyond the plane of the nailing fin, J-channel, the exterior plane of the wall, or interior most point of exterior accessory groove, i.e. screen tracks, varying shapes of brickmold, J-channels, or stucco bars formed in (integral) or applied to the frame and that do not change the sightline,
 - v. Any changes or additions to accessory grooves or decorative flanges, i.e., lengthening, shortening, and the addition of reinforcing web wall(s);
 - vi. Any changes to trim/stops due to an application of a screen system that cover or hold the screen. The product offered without a screen system shall be used to represent this product and minor frame changes to accommodate the screen system are permitted.
- I. Any sightline changes due to:
 - i. Lengthening or shortening of existing walls,
 - ii. Components added or replaced for equal and unequal lite configuration options,
 - iii. For the installation of an outside air ventilator assembly (OAVA), or
 - iv. Changes to the frame profiles to allow for different installations including pocket or sloped-sill configuration options and sill height modifications;

- v. Sightline changes that occur due to any situation in 4.2.1 shall also be allowed. For example, the sightline change due to a change in the glazing bead shall be allowed per Section 4.2.1 (D).

NOTE: A change in sightline will result in a change in the projected frame dimension (PFD) between frame profiles of individual products within a product line.

- J. Changes to the following are deemed minor revisions made to the profiles:
 - i. Limited to changes in the size and shape of snap beads, stops, jamb extensions, dividers (including simulated and true divider lites), weather strip sockets and kerfs, exterior trim caps on curtain walls, window walls, and sloped glazing,

NOTE: The term “stop” above refers to any stop and not just glazing stops.
 - ii. Decorative elements such as grooves, beads, brickmolds or exterior trim components and/or casings formed in or applied to the frame or sash are also allowed,
 - iii. Addition, removal, or modification of pull/lift handles utilized on the interior side of the product, whether it is an integral extrusion of the sash/glazing bead or mechanically fastened, or
 - iv. Addition, removal, or replacement of a snap-in extrusion (in which the thermal conductivity does not differ by more than 10 times of the original material) for sealing and /or interlocking purposes;
- K. Addition, deletion, or changes in hardware and reinforcement (may include reinforcing web walls);
- L. Changes to interior or exterior finishes or coatings;
- M. Sealing characteristic variables and elements: limited to changes in gaskets, sealants, adhesives, weather strips, or the addition/removal of drip-caps, in the same profile (profile changes to accommodate seal changes shall be allowed); and
- N. Vinyl caps attached to the interior.

4.2.2 Individual Products

An individual product is any one specific combination of the product line variables (singularly or in combination) allowed in Section 4.2.1.

All individual products shall be simulated except as allowed in Section 4.2.1.

The following changes are the only allowable exceptions to an individual product:

- A. Variations in frame or sash interior/exterior finish, paint, varnish, or stain shall not constitute different individual products provided that each of these variations does not change the surface emittance by more than 0.1 or overall thickness by more than 0.400 mm (0.016 in);
- B. Products with different variations in glazing divider patterns do not need to be treated as different individual products:
 - i. The manufacturer shall be permitted to define a standard glazing divider pattern (which shall be a standard product offering) which uses glazing dividers 305 mm (12 in) on-center or less,
 - ii. A glazing divider pattern with an on-center spacing closest to but not greater than 305 mm (12 in) shall be designated as the glazing divider pattern, or
 - iii. The overall window dimension shall be used to determine the number of dividers;
- C. Fenestration products that include an outdoor air ventilator assembly (OAVA) shall be considered the same individual product if the OAVA projected dimension (including any components to facilitate installation of the OAVA) is less than or equal to 45 mm (1.75 in). If this dimension exceeds 45 mm (1.75 in) it shall be simulated as an individual product; and
- D. Dynamic glazing products shipped with integral or attached shading systems shall be considered individual products within the product line.

4.2.3 Validation Test Matrix

A validation test matrix of multiple product lines of the same product type or multi-purpose products of different product types shall be permitted to be created.

4.2.3.1 Same Product Type

When the changes listed below are made, two or more product lines of the same product type (as listed in Table 4-3) shall be permitted to be included within the same validation test matrix if the overall U-factor difference between the product lines is $\pm 0.06 \text{ W/m}^2\text{K}$ (0.01

Btu/h·ft²·°F) or less when simulated with the lowest center-of-glazing option.

- A. Changes to shift the location of the glazing relative to the sash or frame – exterior to interior;
- B. Changes (to sash profiles only) to accommodate interior and exterior glazed products;
- C. Product lines fabricated with both pocket and sloped sill options;
- D. Changes to installation orientation of a product where the product has been designed to function when installed facing into or out of the room; or
- E. Changes to accommodate in-swing and out-swing product lines with nearly identical frame/sash base profiles. Minor changes to profiles to accommodate the in-swing and out-swing operation change are allowed, but are limited to: (a) movement, addition, or deletion of specific elements (i.e. walls & cavities), (b) weather-stripping and associated sealing characteristics, and (c) any component changes that occur as a direct result of any hardware changes.

4.2.3.2 Multi-Purpose Products

Multi-purpose products incorporating nearly identical frame/sash base profiles shall be permitted to be within one validation matrix provided that the differences between the base profiles are limited to minor changes to accommodate different product types. The minor changes allowed are:

- A. The movement or addition of specific elements (i.e. walls and cavities) to accommodate the differing operating hardware;
- B. Adding or deleting components to adapt a channeled frame to use a tilt sash;
- C. The use of the hung window sash stiles as the bottom rail;
- D. Deleting of the roller track of the horizontal slider;
- E. The addition of sash balance covers; or
- F. Any other component changes that occur as a direct result of the hardware changes. Any elements added to the profile to accommodate operating hardware shall be of the same material types used in the original profile.

4.2.4 Grouping of Products

This section presents rules that shall be permitted to reduce the number of simulations for individual products that represent a product line. If this approach is used, the total fenestration product U-factor for the group leader shall be used to represent the total fenestration product U-factors for all individual products within that group. These grouping rules shall not be used to group individual products from different product lines into one product line.

To ensure consistent ratings, groupings shall be done in the following order:

Center-of-glazing (includes dividers)	Section 4.2.4.1
Shading systems between glazing layers	Section 4.2.4.2
Frame/Sash	Section 4.2.4.3
Spacer	Section 4.2.4.4
Sightline Grouping	Section 4.2.4.5

Any combination of groupings shall be done in the order established above. All grouping comparisons shall be based on three significant digits.

4.2.4.1 Center-of-Glazing Grouping

For the purpose of determining U-factors, center-of-glazing groups shall consist only of variations in glazing thickness, gap width, gas fill, low-E coatings, and the presence or absence of internal grids. Once all center-of-glazing options have been identified within a product line, the center-of-glazing U-factor shall be simulated for each option. Then these products shall be permitted to be grouped, with each group represented by the center-of-glazing group leader (which shall be the center-of-glazing option with the highest center-of-glazing U-factor):

- A. Glazing options with different numbers of glazing layers shall not be grouped together;
- B. Glazing options with clear glazing in all layers shall not be grouped with glazing options with one or more low-E layers (E is less than or equal to 0.50); and
- C. Only individual products that contain the same mixture of gases shall be permitted to be grouped. Variable concentrations of the same mixture of gases shall be permitted to be grouped as a center-of-glazing grouping as long as the total gas concentration, other than air, is more than 60% and

does not vary by more than $\pm 10\%$ from the group leader.

- D. For the purpose of determining U-factors, divider groups shall consist only of variations in divider materials and shapes. After all divider options have been identified within a product line the divider heat loss shall be simulated for each divider option using the glazing option with the lowest center-of-glazing U-factor in the product line. Dividers shall not be grouped by Center-of-Glass (COG) alone.

These products shall be permitted to be grouped with each group represented by the divider group leader, which shall be the divider option with the highest divider frame heat loss. If this approach is used, the total fenestration product U-factor for the divider group leader shall be used to represent the total fenestration product U-factors for all individual products within that divider group.

- i. For glazing matrix consisting of both double pane and triple pane glazing configurations, dividers can be grouped by simulating each divider option in the appropriate glazing category (double pane or triple pane) with the lowest center-of-glazing U-factor in the glazing category. Divider group leaders for double pane and triple pane configurations shall represent the double pane group and triple pane group, respectively.
- (a) For dual-glazed IGUs, dividers with less than 3.00 mm (0.118 in.) but greater than 1.50mm (0.059 in.) air/gas space between the divider and both adjacent glass surfaces, an adder may be applied to the U-factor of the identical product without dividers to represent the individual product. For dividers less than 25.4 mm (1.00 in) wide, an adder of 0.02 Btu/hr-ft²-F shall be applied to the U-factor of the identical product without dividers. For dividers greater than or equal to 25.4 mm (1.00 in) wide, an adder of 0.03 Btu/hr-ft²-F shall be applied to the U-factor of the identical product without dividers;

- (b) For IGUs with three (3) or more glazing layers and dividers in only one (1) cavity, dividers with less than 3.00 mm (0.118 in.) but greater than 1.50mm (0.059 in.) air/gas space between the divider and both adjacent glass surfaces, an adder may be applied to the U-factor of the identical product without dividers to represent the individual product. For dividers less than 25.4 mm (1.00 in) wide, an adder of 0.01 Btu/hr-ft²-F shall be applied to the U-factor of the identical product without dividers. For dividers greater than or equal to 25.4 mm (1.00 in) wide, an adder of 0.02 Btu/hr-ft²-F shall be applied to the U-factor of the identical product without dividers;
 - (c) Any dividers with a gap of 1.50mm (0.059in.) or less, or any other configuration outside of items (a) through (c), shall be modeled.
 - ii. Products with glazing dividers, or decorative tape-applied coming bars between layers of an insulating glass (IG) unit shall be permitted, at the manufacturer's discretion, to be assigned U-factors based on identical products without such dividers in the following situations:
 - (a) For dividers with at least 3.00 mm (0.118 in.) air/gas space between the divider and both adjacent glazing surfaces, the U-factor of the identical product without dividers shall be used.
 - (b) For simulated coming bars applied with decorative tape to the inner lite(s) of a multi-lite insulating glass unit, with a minimum airspace of 9.50mm (0.375 in.) between the coming bar and adjacent glazing surface, the U-factor of the identical product without simulated coming shall be used.

4.2.4.2 Shading Systems between Glazing Layers Grouping

When rating dynamic glazing products with shading systems between glazing layers, it shall be permitted to group combinations of shading systems and glazing layers. For the purposes of determining U-factors, the shading system and glazing layers comprising each group leader shall be determined as follows:

- A. Glazing layers within a group, and the corresponding glazing layers used in the group leader, shall be determined in accordance with the center-of-glazing grouping rules of Section 4.2.4.1.
- B. Shading systems within a group may vary by color, material, finish, rise (i.e., the arc in the case of venetian blind slats), and thickness of the shading systems. ; and
 - i. Grouping by color shall adhere to one of the two options per ANSI/NFRC 200, Section 4.2.3.C.i; or
 - ii. Grouping by the default venetian blind slat material shall use aluminum alloy (k=160 W/mK) as the material and the finish (i.e., surface emittance) per ANSI/NFRC 200, Section 4.2.3.C.ii.
 - iii. The venetian slat rise of 0mm shall be permitted to represent all offered rises.

4.2.4.3 Frame/Sash Grouping

- A. For the purpose of determining U-factors, frame groups shall consist only of frame/sash base profile variations consistent with the definition of a product line. After all frame options have been identified within a product line, the frame and edge-of-glazing heat loss shall be simulated for each option with the lowest center-of-glazing U-factor in the product line. The frame group leader shall be identified as the set of frame options within the highest whole product heat loss. If this approach is used, the total fenestration product U-factor for the frame group leader shall be used to represent the total fenestration product U-factors for all individual products within that group.
- B. To determine the frame group leader the spacer used in simulation shall be a spacer used by the manufacturer. If more than one spacer is available,

the spacer used shall be selected from the list below in the following order:

Group 1 – Spacer containing aluminum

Group 2 – Spacer containing mild steel (i.e. galvanized steel, tin-plated steel)

Group 3 – Spacer containing stainless steel

Group 4 – Spacer containing all non-metallic materials

4.2.4.4 Spacer Grouping

For the purpose of determining U-factors, spacer groups shall consist only of variations in spacer assembly materials and shapes. After all spacer options have been identified within a product line, the frame and edge-of-glazing heat loss shall be simulated for each spacer option with the lowest center-of-glazing U-factor and the frame group leader in the product line. These products shall be permitted to be grouped with each group represented by the spacer group leader (which shall be the option with the highest whole product heat loss). If this approach is used, the total fenestration product U-factor for the spacer group leader shall be used to represent the total fenestration product U-factors for all individual products within that group.

For glazing matrix consisting of both double pane and triple pane glazing configurations, spacers can be grouped by simulating each spacer option in the appropriate glazing category (double pane or triple pane) with the lowest center-of-glazing U-factor in the glazing category. Spacer group leaders for double pane and triple pane configurations shall represent the double pane group and triple pane group, respectively.

4.2.4.5 Sightline Grouping

Sightline groups shall consist only of individual products with sightline differences due to frame/sash base profile variations. These products shall be permitted to be grouped with each group represented by the sightline group leader, which shall be the sightline option within the group with the highest total fenestration product U-factor. Since sightline changes may be in small size increments, the determination of the highest total fenestration product U-factor for each sightline group shall be determined for the frame/sash with the greatest and least daylight opening areas, using the

lowest center-of-glazing U-factor option and the model size for the product type per Table 4-3.

4.2.5 General Simulation Rules

- A. If a nail flange is not removable and is identified as such by the manufacturer, the product shall be simulated and tested with the nail flange covered with a nominal 1 in x 4 in fir trim. If a nail flange is removable, the product shall be simulated and tested without the nail flange;
- B. Products with integral appendages that extend beyond the rough opening and are not exposed after installation shall be permitted to be assumed to have the same U-factors as identical products without such appendages;
- C. Products with elements added to the outer surface of the framing so as to expand the frame in the direction parallel to the plane of installation and allow for different installations, shall be permitted to have the same U-factors as identical products without such added elements:

Examples of such elements include, but are not limited to, subsills and frame expanders;
- D. Nominal glass thickness shall be permitted to be used for determining U-factor provided the emissivity of the glass is taken from the approved NFRC Spectral data file and the air gap dimension is maintained at the dimensions specified by the manufacturer. The nominal glass thickness to be used shall be listed in ASTM C 1036 [Reference 6]. If the glass thickness does not fall within the nominal thickness ranges, the actual thickness shall be used;
- E. An infill system with a “Center-of-Glazing Component Test” that utilizes an adaptor between the infill and frame which allows for direct replacement of the standard glazing shall be considered an individual product in the same product line with the standard glazing, as long as all components (including the adaptor) are included in the simulation for the infill glazing system;
- F. Non-rectangular fenestration products shall be rated as rectangular fenestration products per the model size in Table 4-3 (develop a product line with the same frame cross sections as the non-rectangular fenestration product); and
- G. IG units manufactured with breather or capillary tubes designed to remain closed after manufacturing shall be simulated as having the same gas content; IG units manufactured with

breather tubes intended to be opened at some point after manufacturing shall be simulated as air-filled IG units:

- H. For the purpose of determining U-factors, glazing tint and/or obscurity (including obscure glazing) shall be permitted to be simulated using a same-thickness non-tinted glazing configuration (without the obscuring features, if applicable) and does not need to be simulated separately as long as this change is not associated with any change in coating properties or thermal conductivity. In this case, an uncoated rough glass or uncoated fritted glass surface can be assumed to have the same emittance as a typical uncoated smooth glass surface. For obscure glazing this option can be used as an alternative to obtaining product emittance using the measurement procedure defined in NFRC 301 for non-specular surfaces; and
- I. For glazing options without an interior exposed lowE coating, products with removable or non-removable dividers (e.g. SDL) or decorative tapes that are applied to glazing to simulate the appearance of dividers applied to the room side and/or exterior side glazing surface shall be permitted to be assumed to have the same U-factors as identical products without such dividers. However, any component (shadow bar) of an SDL that is within the cavity of the IGU shall be treated as a normal internal divider. An SDL applied to a glazing with an interior exposed lowE coating shall be required to be modeled in accordance with Section 8.3.2 of the NFRC Simulation Manual.

At the discretion of the manufacturer, any SDL applied to a glazing without an interior exposed LowE coating shall be permitted to be modeled in accordance with Section 8.3.2 of the NFRC Simulation Manual.
- J. Laminated glass layers which incorporate embedded Building Integrated Photovoltaics (BIPV) shall be permitted to be assumed to have the same U-factor as the clear laminated glass version.

4.2.6 General Testing Rules

The baseline product shall be the individual product selected for validation testing (see Section 4.1.1). The individual product selected as the baseline product shall have a simulated U-factor within $0.60 \text{ W/m}^2\text{K}$ ($0.10 \text{ Btu/h}\cdot\text{ft}^2\cdot^\circ\text{F}$) or 20% of the lowest simulated U-factor, whichever is greater. Size variations shall be limited to the representative size as defined in Section 4.6.1 for the product type. If more than one product type is being validated with a single test, then the baseline product shall be selected from the product lines in the validation test matrix.

4.2.7 General Rating Rules

- A. Combination products shall not be rated in combination.
- B. Sash kits, sliding door panels, and side hinged door slabs shall be rated using one of two options:
 - Option 1: Simulate and test (if required) in a frame of similar material and design as the proposed installation. Manufacturers of sash kits, sliding door panels, and side hinged door slabs shall provide information on the intended installations for those products. (See Figure 5-6 for an example of a default double hung frame when a sash kit is intended to be installed in a wood double hung window.)
 - Option 2: Sash kits, sliding door panels, and side hinged door slabs that are identical in material and design as a manufacturer's rated product line may use the same ratings. The manufacturer shall verify the rated frame meets the requirements of Option 1.

4.2.8 Additions to the Product Line

The product line validated simulation procedure (see Section 4.1.1) may be used to determine U-factors of additions to a validated product line if the simulated U-factor for the additional product(s) is either higher than the previously computed baseline product U-factor, or not more than 0.60 W/m²K (0.10 Btu/h·ft²·°F) or 20% (whichever is greater) lower than a previously simulated baseline product U-factor.

If the simulated U-factor of the addition to the product line is outside these bounds, a new baseline product shall be established and validated by testing.

If a manufacturer introduces a new individual product into multiple product lines (see Section 4.2.6 for an example of glazing or spacer options) that has simulated U-factor more than 0.60 W/m²K (0.10 Btu/h·ft²·°F) or 20% lower than the simulated baseline product U-factor, only one product line with a new individual product shall be tested. If the simulation of the new baseline product validates, then all other product lines using this option shall be validated and those new individual products shall be permitted to be simulated to obtain U-factors.

4.3 Standard Conditions

This section presents standard simulations, tests, and calculations for determining total or component fenestration product U-factors.

4.3.1 Simulation

The requirements of Reference 2 (NFRC Simulation Manual) and of Section 4.3.2.1 shall be used to determine total fenestration product U-factors.

Skylights and other sloped glazing products shall be simulated and rated at a slope of 20° above the horizontal. Until accurate simulation software is available, tubular daylighting devices (TDDs) shall be tested and rated with the tube in a vertical orientation (Figures 5-14a and b). All other products shall be simulated and rated in the vertical position.

Spandrel panel systems shall be simulated with 254mm (10 in.) of “Edge” assigned to the spandrel panel system instead of the required 63.5mm (2.5 in.) as noted in Section 4.3.1.A below.

All calculations shall be based on computer simulations using the latest approved software (which shall be in compliance with ISO 15099), with the following exceptions:

- A. For calculating the overall U-factor (per ISO 15099), the area-weighted method as described in Section 4.1.4 of ISO 15099 shall be the only method permitted, with the exception of opaque spandrel panel systems which shall use 254mm (10 in.) of edge-of-glazing dimension;
- B. Thermophysical properties of materials shall be determined in accordance with NFRC 101;
 - i. For metallic frames not specifically noted in Table 4-2, *Boundary Conditions*, the following interior boundary conditions shall be used:
 - (a) All non-thermally broken metal frames shall use "Interior Aluminum Frame (convection only)";
 - (b) All thermally improved metal frames shall use "Interior Thermally Improved Frame (convection only)"; and
 - (c) All thermally broken metal frames shall use "Interior Thermally Broken Frame (convection only)";
 - ii. For metallic surfaces, they shall be assigned the emissivity for exposed, painted, or anodized as appropriate. Surfaces to be considered exposed shall follow the same rules as aluminum alloy frames but with the emissivity appropriate for that material.

- C. For fenestration products incorporating venetian blinds:
 - i. Include models for venetian blinds slats (See References 13 and 14);
 - ii. Thermal radiation from venetian blinds shall be calculated using directional diffuse radiation (See References 13 and 14);
- D. Include models for fritted, etched, sand-blasted glazing, and other light-scattering products that can be measured according to NFRC 301 (See Reference 14 and 15);
 - i. Glazing layers that are partially covered with a light-scattering element shall be simulated using the properties of the fully covered layer and properties of the non-scattering layer, and the final result is the area-weighted mix of the different areas. This could be done for any number of different areas.
 - ii. Using data according to NFRC 301 for light-scattering products is an alternative to using a clear glazing as approximation as described in 4.2.5 H;
- E. Include models for fenestration products incorporating vacuum insulating glass (VIG) (See Reference 16 and 17)
- F. Section 8.2 in ISO 15099 addresses environmental conditions. The following conditions shall be used for the determination of U-factor:

NFRC Simulation Conditions:

$$\begin{aligned}
 T_{in} &= \text{interior ambient temperature of } 21.0^{\circ} \text{ C (69.8}^{\circ} \text{ F)} \\
 T_{out} &= \text{exterior ambient temperature of } -18.0^{\circ} \text{ C (-0.4}^{\circ} \text{ F)} \\
 V &= \text{wind speed of } 5.5 \text{ m/s (12.3 mph)} \\
 T_{rm,out} &= T_{out} \\
 T_{rm,in} &= T_{in} \\
 I_s &= 0 \text{ W/m}^2 \text{ (0 Btu/h}\cdot\text{ft}^2\text{)}
 \end{aligned}$$

- G. Section 8.3 in ISO 15099 addresses convective film coefficients on the interior and exterior of the fenestration product;
- H. The indoor side convective heat transfer coefficient shall be based on the center of glass temperature and the entire fenestration product height; this film coefficient shall be used on all glass and edge of glass indoor surfaces with the

exception of spandrel panel systems. The spandrel panel shall be assigned a boundary condition as noted in Table 4-2 below.

- I. Frame section indoor convective film coefficients shall be constants, which depend on frame material type; these values are listed in Table 4-2;
- J. The outdoor side convective heat transfer coefficient shall be calculated based on wind speed (as defined under 4.3.1.E) and shall be applied to all outdoor surfaces, glass and frame. Standard values for outdoor convective surface heat transfer coefficients is listed in Table 4-2;
- K. On the indoor side of a fenestration product, detailed radiation model, based on gray body radiation model as described in Section 8.4.2.1 in ISO 15099, shall be used for all products. This model applies to both glass and frame surfaces;
- L. The use of detailed radiation model on indoor fenestration surfaces makes the use of “slightly or partially ventilated cavities” on the indoor frame surfaces redundant (see Section 6.7.1 of ISO 15099). The standard frame convective film coefficients (h_c) shown in Table 4-2 and detailed radiation model referenced above shall thus be applied to all interior frame surfaces;
- M. On the outdoor side of a fenestration product, blackbody radiation model (as defined in ISO 15099) shall be used. This model applies to both glass and frame surfaces;
- N. Frame absorptance does not affect the total product U-factor; therefore, it is not required to use the default frame absorptance values stated in ANSI/NFRC 200, Section 4.5.D. Only the individual products used to generate the $SHGC_0$, $SHGC_1$, VT_0 , and VT_1 shall be calculated using the default absorptance values; and
- O. All cross-sections shall include 150 mm (6 in) of glazing section from the sightline to the end of the glazing section, while maintaining a 63.5 mm (2.5 in) edge-of-glazing dimension. The exception is with spandrel panel systems which shall be 406mm (16 in.) of spandrel panel section while maintaining a 254mm (10 in.) edge dimension.

Table 4-2 – Boundary Conditions

Boundary Condition	Radiation Model	Convective Film Coefficient Boundary	
		Tilt = 90° W/m ² K (Btu/h·ft ² ·°F)	Tilt = 20° W/m ² K (Btu/h·ft ² ·°F)
NFRC 100-2010 Exterior	Blackbody	26.00 (4.578)	26.00 (4.578)
Interior Aluminum Frame (convection only)	Automatic Enclosure Model	3.29 (0.579)	4.65 (0.819)
Interior Thermally Broken Frame (convection only)	Automatic Enclosure Model	3.00 (0.528)	4.09 (0.720)
Interior Thermally Improved Frame (convection only)	Automatic Enclosure Model	3.12 (0.549)	4.32 (0.761)
Interior Wood/Vinyl Frame (convection only)	Automatic Enclosure Model	2.44 (0.429)	3.09 (0.544)
Interior Glazing System boundary condition	Automatic Enclosure Model	Depends on the WINDOW calculations for the imported glazing system	
Steel Skin Door Slabs	Automatic Enclosure Model	Non-Metal Edge of Door Slab shall use “Wood/Vinyl Frame” Steel or Aluminum Edge of Door Slab shall use “Thermally-Improved”	
Interior Insulated Opaque Spandrel Panel	Automatic Enclosure Model	Shall use the interior boundary condition from above that is equivalent to the glazed wall system’s intermediate frame type	

4.3.2 Testing

4.3.2.1 Total Fenestration Product Test Procedure

NFRC 102 [Reference 1], shall be used to determine tested total fenestration product U-factors. The following conditions also apply:

- A. Test specimen size tested shall be in accordance with Section 4.6.1;
- B. All test specimens shall be tested without screens, removable grilles and trims, or any other applied devices;
- C. All test specimens shall be tested in the vertical position, except tubular daylighting devices (TDDs). TDDs shall be tested and rated with the tube in a vertical orientation (see Figures 5-10a and b). For

determining validation of the baseline product only, skylights and other sloped glazing products shall be simulated in a vertical position; and

- D. The test specimen shall not be modified by the testing laboratory, except as allowed in Reference 1 for sealing against air leakage and as required in this section.

4.3.2.2 Center-of-Glazing Component Test Procedure

If the U-factor for the product cannot be simulated in accordance with Section 4.3.1, the test methods in ASTM C1363-97 (or later versions) using NFRC environmental conditions, shall be used to determine the conductance of the center-of-glazing. The conductance value shall be used to determine an effective conductivity at the thickness of the glazing/frame insert which can be used to build a glazing layer in WINDOW.

The specimen shall be 1000 mm x 1000 mm (39 in x 39 in) or closest deviation as determined using Section 4.6. This size represents all product types in Table 4-3.

For a product that consists of a glazing panel only (without frame), the tested U-factor per this section, standardized in accordance with NFRC 102, shall be the U-factor of the product.

Obscure and/or tinted versions of a same-thickness glazing configuration tested using this procedure may be represented by the results of the glazing configuration without the obscuring feature and/or tint as long as the product emissivity or thermal conductivity does not change. In this case, an uncoated rough glass or uncoated fritted glass surface can be assumed to have the same emissivity as a typical uncoated smooth glass surface.

4.3.2.3 Component Substitution

Component substitutions may be made if using approved NFRC simulation tools to verify the performance equivalence to three significant digits. The original certified U-factors shall be used to represent the new product.

For products certified under the testing alternative method (Section 4.1.2), component substitution shall apply only if the simulation laboratory states in the simulation report that the simulation tools are appropriate for the simulation of the components being substituted.

- A. For spacer substitutions, only the spacer shall be modeled, or
- B. For glazing system changes, only the center-of-glazing shall be modeled.

4.4 Model Sizes and Configurations

For each individual product, total fenestration product U-factors shall be reported for the specified configuration at the model size as shown in Table 4-3.

For products that, when area-weighted at the model size, have less than 63.5 mm (2.5 in) edge-of-glazing area or edge-of-divider area, the overall product dimensions shall be increased as needed to restore the standard 63.5 mm (2.5 in) of edge-of-glazing for each section (including dividers). The increase in size shall result in zero center-of-glass area.

Table 4-3 – Product Types and Model Sizes

Product Type	Model Size Width x Height, mm (in)	Operable (X) Non-operable (O)
Windows		
Casement – Single	600 x 1500 (24 x 59)	X
Casement – Double	1200 x 1500 (47 x 59)	XX, XO
Dual-Action	1200 x 1500 (47 x 59)	X
Fixed	1200 x 1500 (47 x 59)	O
Greenhouse/Garden	1500 x 1200 (59 x 47)	X, O
Horizontal Slider	1500 x 1200 (59 x 47)	XX, XO
Pivoted	1200 x 1500 (47 x 59)	X
Projecting (Awning – Single)	1500 x 600 (59 x 24)	X
Vertical Slider	1200 x 1500 (47 x 59)	XX, XO
Doors and Door Related		
Side-Hinged Exterior Door	960 x 2090 (38 x 82)	X, O
Side-Hinged Exterior Door (Double)	1920 x 2090 (76 x 82)	XX, XO
Sliding Glass Door	2000 x 2000 (79 x 79)	XX, XO
Sidelite	960 x 2090 (38 x 82)	X, O
Transom	2000 x 600 (79 x 24)	O
Garage (Vehicular Access)/Rolling Door	2134 x 2134 (84 x 84)	X
Skylights		
Skylight/Roof Window	1200 x 1200 (47 x 47)	X, O
Tubular Daylighting Device	350 (14) Diameter	O
Glazed Wall Systems		
Curtain Wall	2000 x 2000 (79 x 79)	OO
Window Wall	2000 x 2000 (79 x 79)	OO
Sloped Glazing	2000 x 2000 (79 x 79)	OO
Spandrel Panel System	2000 x 2000 (79 x 79)	OO

4.5 Simulation Procedures

4.5.1 Total Fenestration Product U-factors for Model Sizes

For a given product line, list all individual products and the associated model size U-factors (see Section 4.4). The model size matrix of U-factors for a given product line shall be outlined as shown in Section 4.1.1.A.

This matrix shall include all individual products within a product line that are available from the manufacturer, including but not limited to the number of glazing layers, glazing types, glazing coatings, gas fills, gap widths, spacer types, and use of dividers. See Section 4.2.1 for the definition of a product line and Section 4.2.2 for the definition of an individual product.

In order to determine total fenestration product U-factors for all of the entries in this matrix, use the product line validated simulation procedure, presented in Section 4.1.1. The testing alternative, presented in Section 4.1.2, may only be used to determine the U-factor for an individual product(s) within a product line if that individual product(s) cannot be simulated in accordance with Section 4.3.1.

Thus, the only time a product line may contain tested as well as simulated total fenestration product U-factors shall be when an accredited simulation laboratory states in the simulation report that it cannot simulate an individual product(s) to a reasonable accuracy. In addition, the written permission of NFRC shall be required.

4.5.2 Total Fenestration Product

The U-factor of a fenestration product may vary by size, depending upon the component materials and the glazing. To simplify the system, ratings are based on a specific model size. The U-factor for the model size in Table 4-3 for all single-lite products shall be representative of all variations in configuration with one or more lites (operable/non-operable) for the product type. The U-factor for the model size in Table 4-3 for all dual-lite products shall be representative of all variations in configuration with two or more lites for the product type. Casement and Exterior Door products shall be rated as dual-lite types only when a single-lite version is not produced. The U-factor for the model size shall be representative of all variations in size and factory assembled operable and non-operable units in a common frame.

For gas fills other than air, the gas fill concentration percentages represent the initial nominal design value. The maximum gas concentration used in the simulations shall not exceed the following values:

Evacuated Chamber Filling	97% for any gas type
Two-Probe filling with concentration sensor	95% for Argon 90% for any other
Single-Probe Timed Filling	90% for any gas type

Non-continuous elements including (but not limited to: screws and bolts in sloped glazing and poured and debridged thermal barriers that are not fully debridged), shall be simulated as indicated in Reference 2.

The total fenestration product U-factor calculation procedure can be found in the applicable fenestration product section, see Sections 5.1 to 5.10.

4.5.3 Component

4.5.3.1 Approved Center-of-Glazing Simulation Programs

Approved center-of-glazing software shall be used. NFRC approved software is listed in Reference 3.

4.5.3.2 Approved 2-D Heat Transfer Simulation Programs

Approved 2-D heat transfer software shall be used. NFRC approved software is listed in Reference 3.

4.6 Test Procedures

There are two different test procedures used in ANSI/NFRC 100:

Total Fenestration	4.6.1
Glazing	4.6.2.1

Section 4.3.2.1 defines the total fenestration product test procedure, its standard conditions and requirements. The total fenestration product test procedure shall be used to validate the product line simulations (see Section 4.1.1) and shall be used under the testing alternative (see Section 4.1.2), which shall be used only if the U-factor for the product cannot be simulated in accordance with Section 4.3.1. Section 4.3.2.2 defines a glazing component test procedure, which may be used only if the U-factor for the center-of-glazing cannot be simulated in accordance with Section 4.3.1. Since the glazing system may include non-homogeneous elements (e.g. spacers, thermal bridges, etc.), an average conductance shall be assigned to

the whole glazing system. Insertion of such a glazing system in the 2-D heat transfer program shall be done as a continuous slab of material with the conductivity equal to the average conductivity of the glazing system.

4.6.1 Total Fenestration Product

For the purposes of testing (see Section 4.3.2), production line units and sizes shall be used. The test specimen size shall be the production line size with the least deviation (D) from the model size (see Table 4-3) as defined by Equation 4-2:

$$D = \sqrt{(W_p - W_m)^2 + (H_p - H_m)^2} \quad \text{Equation 4-2}$$

Where

D = Deviation in mm (in)
 W_p, H_p = Width, height of production size in mm (in)
 W_m, H_m = Width, height of model size in mm (in)

For rectangular fenestration products, the representative sizes reported by the simulation laboratory shall not vary by more than 13.0 mm (0.5 in) in width or 13.0 mm (0.5 in) in height (25 mm [1 in] for doors) from the reported sizes of the tested specimens.

For non-rectangular products, the simulated product area shall meet the following relationship with the tested specimen area:

$$A_{test} - C(W_m + H_m) \leq A_{sim} \leq A_{test} + C(W_m + H_m) \quad \text{Equation 4-3}$$

Where

A_{sim} = Area of product simulated in mm² (in²)
 A_{test} = Area of specimen tested in mm² (in²)
 C = A constant, 25 mm (1 in)
 W_m, H_m = Width, height of model size in mm (in)

4.6.2 Component

4.6.2.1 Glazing Component Test Procedure

The test methods in Reference 6, using NFRC environmental conditions, shall be used to determine the average conductivity of the glazing. The test results are applicable only to the unit tested, with no variations in shape or material allowed.

4.6.3 Calculation Procedure

The total fenestration product U-factor shall be calculated as outlined below:

- A. Determine all of the following, as applicable:
 - i. Center-of-glazing U-factor per the total product height procedure (as defined in Reference 2) using an approved center-of-glazing simulation program or the approved glazing test procedure given in Section 4.3.2.2,
 - ii. Edge-of-glazing U-factor, using an approved 2-D heat transfer simulation program. In the case that center-of-glass thermal performance is simulated, this center-of-glass configuration shall be inserted into the frame and spacer assembly shall be added. In the case that the glazing component test procedure had to be utilized, entire glazing system shall be represented as a homogenous slab of material with conductivity equal to average conductivity of the measured specimen. For mullions and meeting rails, two glazing systems shall be inserted on each end and the reported U-factor shall be the average of the two edge-of-glass U-factors,
 - iii. Divider U-factor, using an approved 2-D heat transfer simulation program. Divider shall be simulated with two glazing systems pointing in opposite directions, simulated in a vertical orientation,
 - iv. Edge-of-divider U-factor, using an approved 2-D heat transfer simulation program. Edge-of-divider U-factor shall be the average of the two edge-of-glass section U-factors,
 - v. Frame U-factor using an approved 2-D heat transfer simulation program. Frame U-factor is always calculated on the exposed indoor side of frame, starting at the bottom of the frame and ending at the indoor sight line. For mullion and meeting rail cross-sections, frame surface is counted from one indoor sight line to another,
 - vi. The component areas of:
 - (a) Center-of-glazing area,
 - (b) Edge-of-glazing area,
 - (c) Divider area,

- (d) Edge-of-divider,
 - (e) Frame area, and
 - (f) Projected fenestration product area;
- B. Perform the following calculations as explained:
- i. Multiply the center-of-glazing, edge-of-glazing, divider, edge-of-divider, and frame U-factors by their corresponding areas,
 - ii. Total these quantities, and
 - iii. Divide this total by the projected fenestration product area to produce simulated total fenestration product U-factors for all the fenestration products in the matrix of required U-factors.

4.6.4 Reporting of Ratings

The full floating-point accuracy of any software shall be used for all calculations. The final U-factor shall be reported in IP units (BTU/h·ft²·°F) and rounded to two digits following the decimal point after truncating the full precision result to six decimal places. If the U-factor is to be reported in SI units as well as IP units, the SI U-factor shall be converted from the IP U-factor following the procedure outlined in NFRC 700, Section 6.5.I.iii.

4.7 Validation

4.7.1 Equivalence


Simulated and tested U-factors for a given total fenestration product shall be considered equivalent if the agreement between the two numbers is within the ranges in Table 4-4.

Table 4-4 -- Equivalence

Simulated U-factor	Accepted Difference Between Tested and Simulated U-factor
1.7 W/m ² K (0.3 Btu/h·ft ² ·°F) or less	0.17 W/m ² K (0.03 Btu/h·ft ² ·°F) or less
Greater than 1.7 W/m ² K (0.3 Btu/h·ft ² ·°F)	10% of Simulated U-factor

4.8 Figures


Figure 4-1 – Fenestration Product Schematic – Vertical Elevation

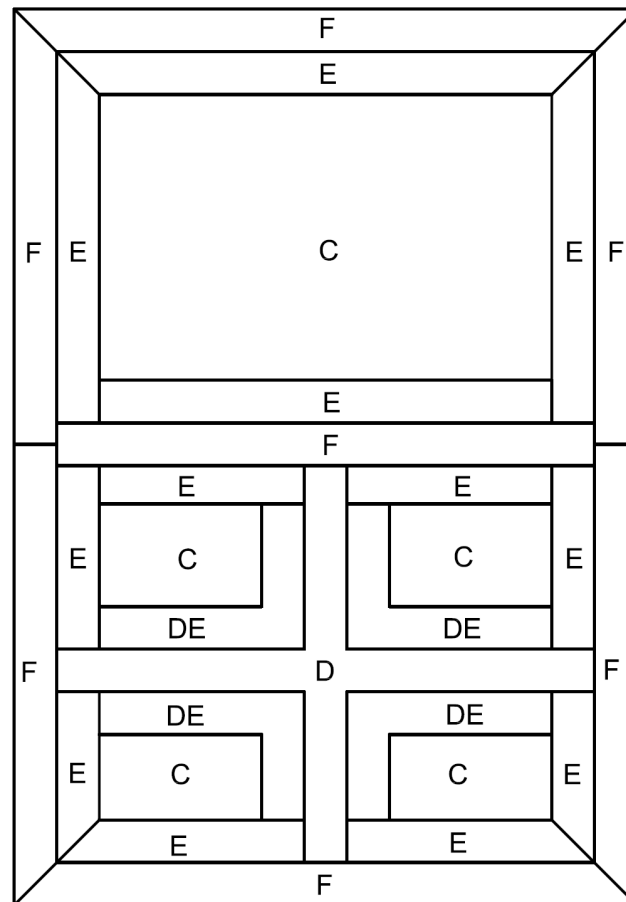

LEGEND
C Center-of-Glazing
E Edge-of-Glazing
F Frame
D Divider
DE Edge-of-Divider

Center-of-glazing, edge-of-glazing, divider, edge-of-divider, and frame areas for a typical fenestration product. Edge-of-glazing and edge-of-divider are 63.5 mm (2.5 in) wide (with exception of Spandrel Panel Systems which shall be 254mm (10 in)). The sum of these component areas equals the total projected fenestration product area.

Figure 4-2 – Fenestration Product Schematic – Vertical Section

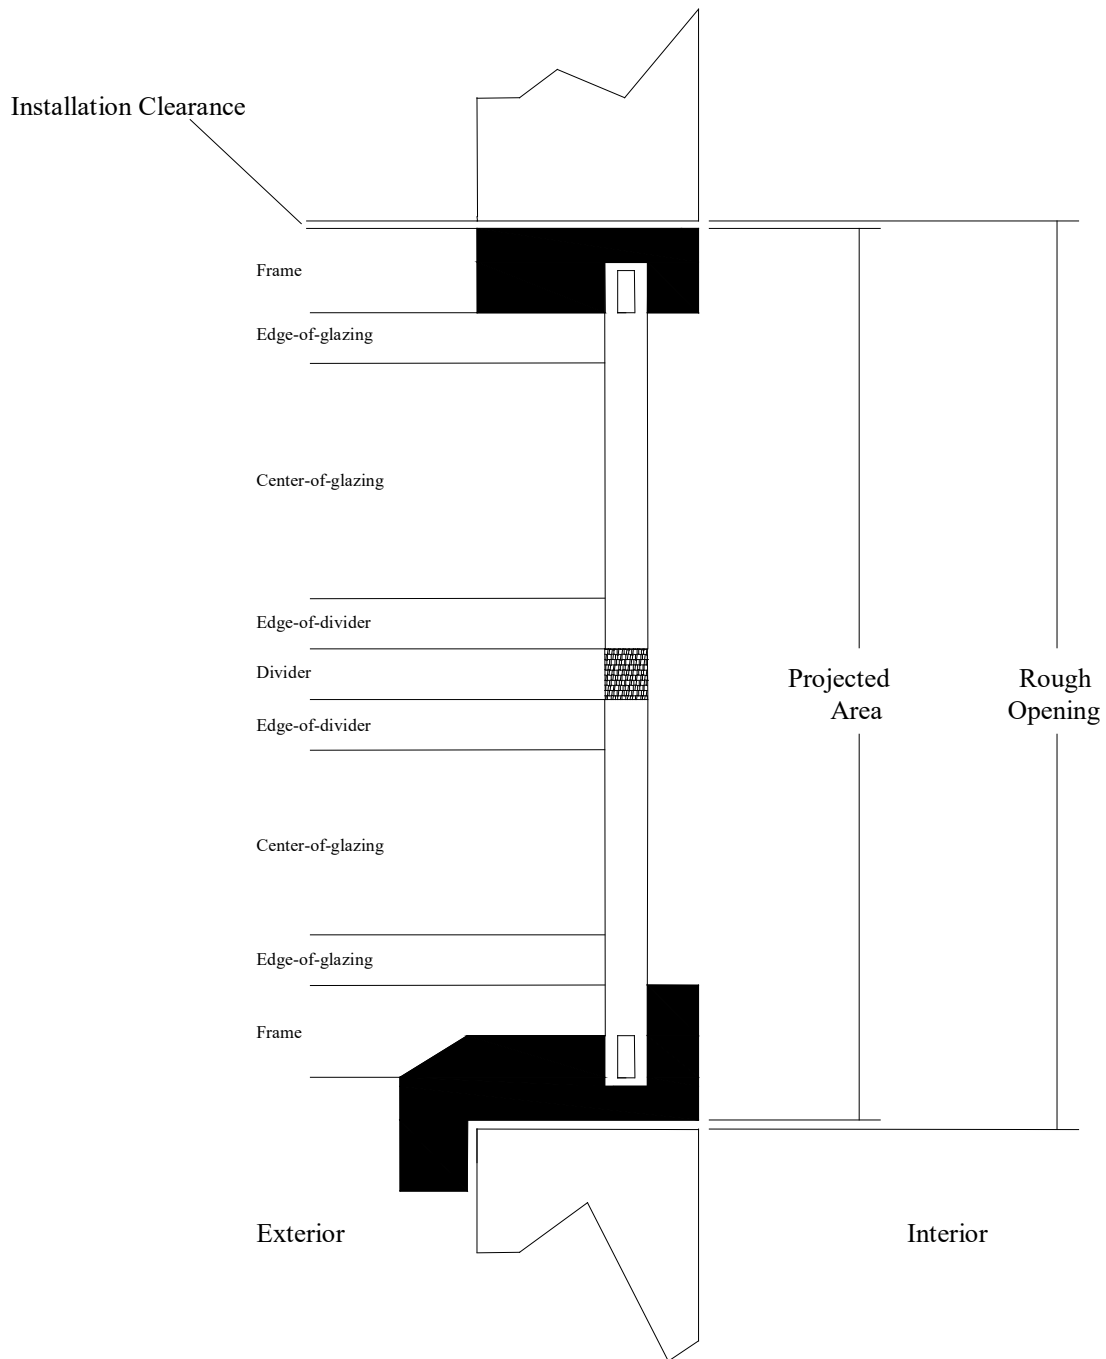

Center-of-glazing, edge-of-glazing, divider, edge-of-divider, and frame areas for a typical fenestration product. Edge-of-glazing and edge-of-divider are 63.5 mm (2.5 in) wide. The projected fenestration product area is the rough opening less installation clearances.

Figure 4-3 – Divider Height and Divider Width


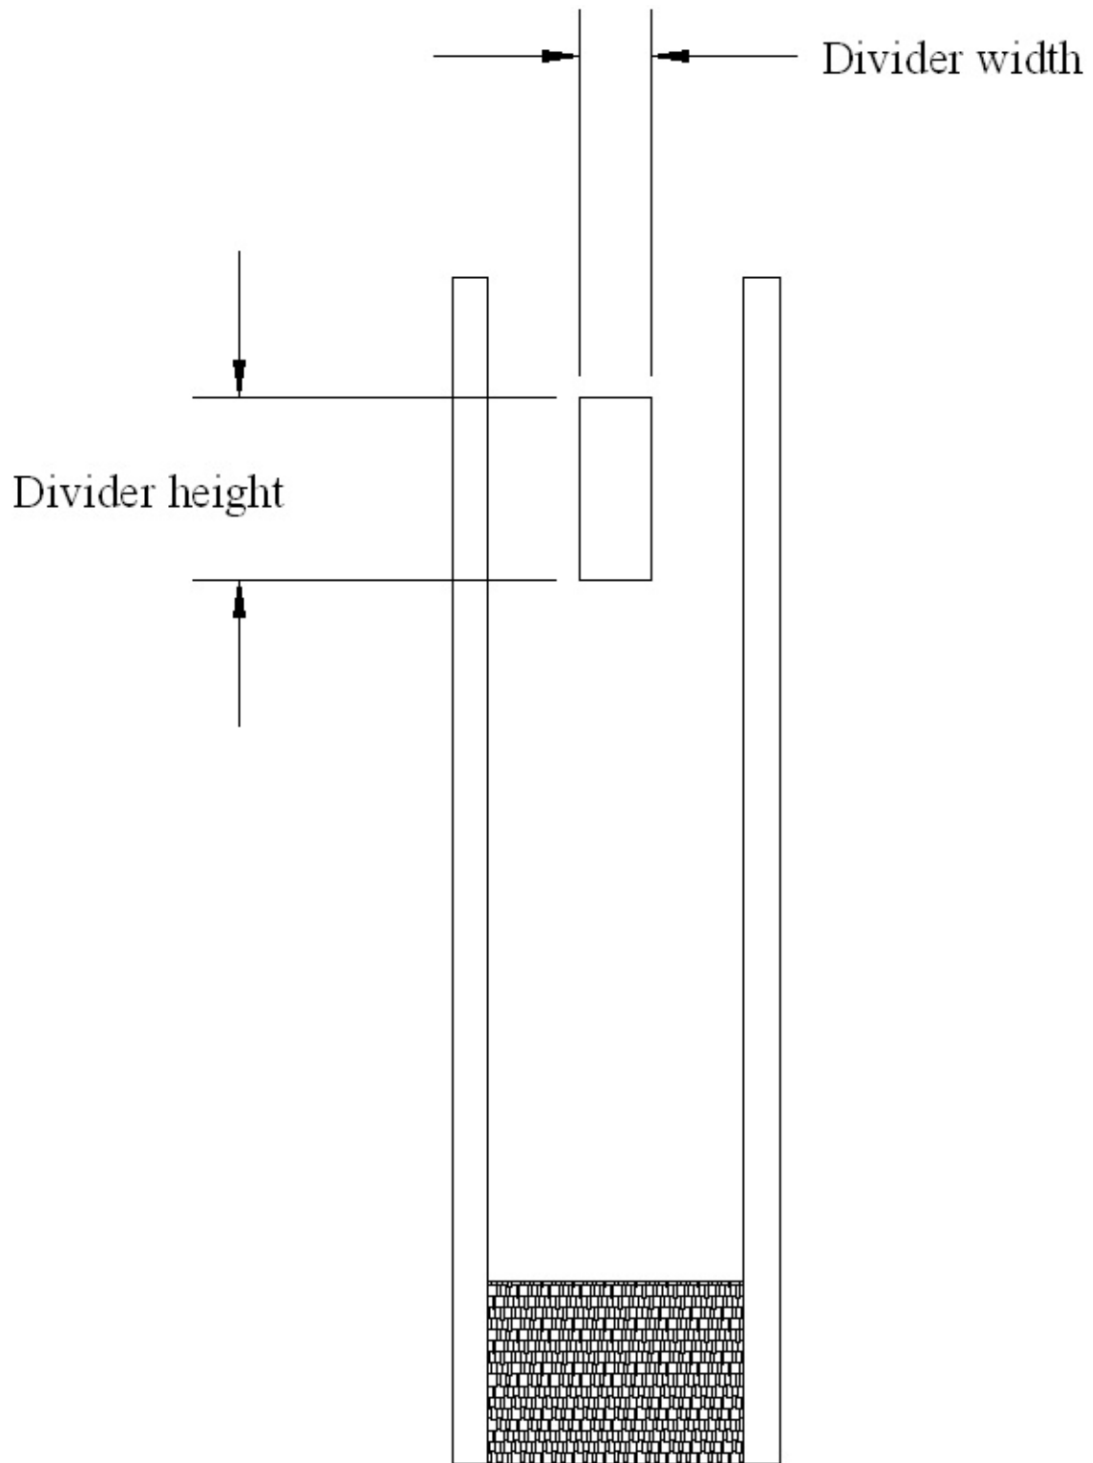


Figure 4-4 – Sightline Examples

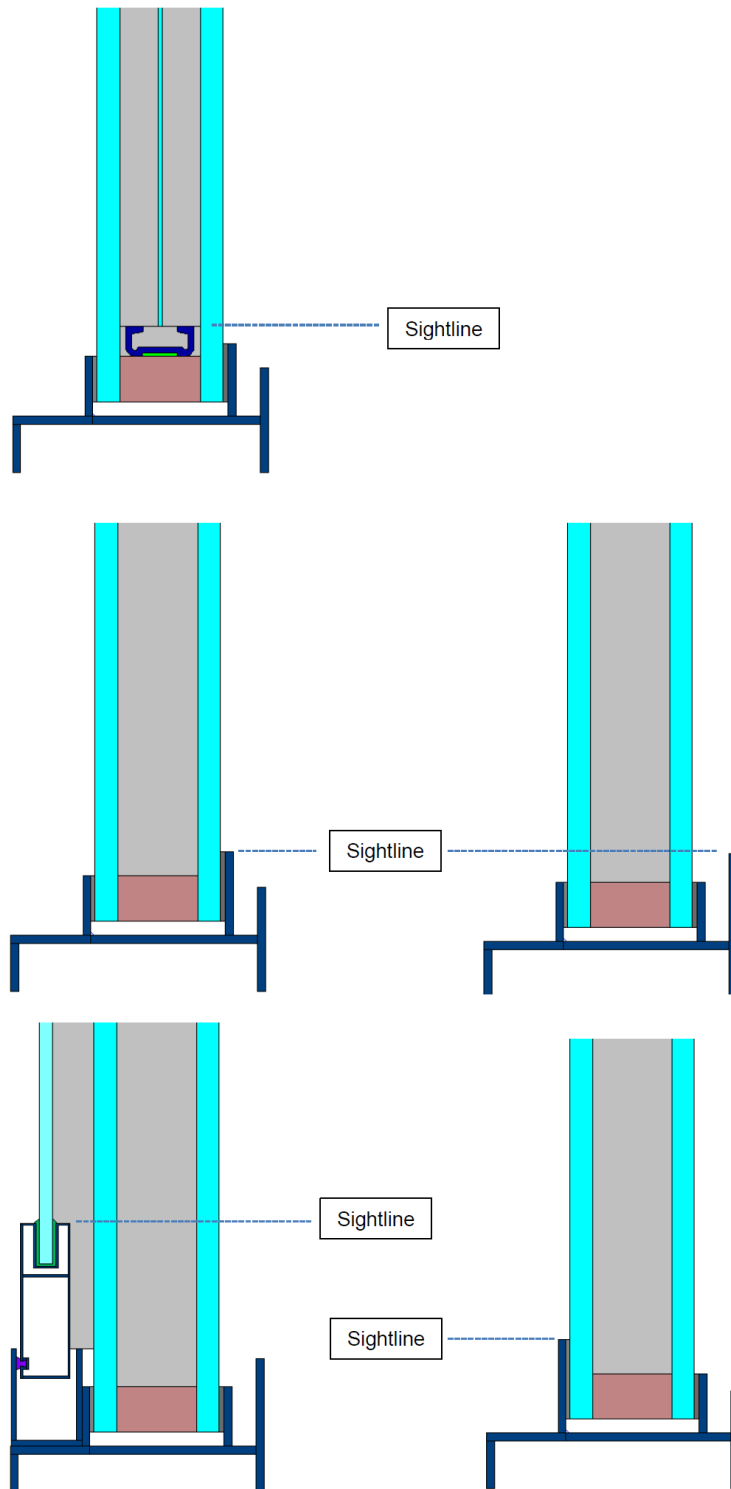

5. VARIATIONS FROM THE GENERAL REQUIREMENTS

This section presents and references methods for determining specific product system heat transfer properties or quantities used in the determination of these properties. At this time, the scope of these properties is limited to total product system U-factor.

5.1 Windows and Sliding Glass Doors

5.1.1 Scope

This section presents additional details specific to windows and sliding glass doors.

This section presents and references methods for determining windows and sliding glass doors product system heat transfer properties or quantities used in the determination of these properties. The scope of these properties is limited to windows and sliding glass doors total product system U-factor.

5.1.2 Variations from Standard Product Lines

None

5.1.3 Variations from Standard Individual Products

None

5.1.4 Variations from Standard Simulation and Test Conditions

Sliding glass door product types are limited to XO and XX configurations per Table 4-3, therefore, single panel sliding pocket doors shall be simulated and tested as a single panel door and shall be calculated for U-factor using the single panel side-hinged exterior door product type.

5.1.5 Calculation of Total Product Rating

The total fenestration product U-factor shall be calculated as per Section 4.6.3. Perform the following calculation to determine total product rating.

$$U_t = \frac{[\Sigma(U_f A_f) + \Sigma(U_d A_d) + \Sigma(U_e A_e) + \Sigma(U_{de} A_{de}) + \Sigma(U_c A_c)]}{A_{pf}}$$

Equation 5-1

Where:

U_t = Total product U-factor

A_{pf} = Projected fenestration product area

U_f	=	Frame U-factor
A_f	=	Frame area
U_d	=	Divider U-factor
A_d	=	Divider area
U_e	=	Edge-of-glazing U-factor
A_e	=	Edge-of-glazing area
U_{de}	=	Edge-of-divider U-factor
A_{de}	=	Edge-of-divider area
U_c	=	Center-of-glazing U-factor
A_c	=	Center-of-glazing area

5.1.6 Figures

None

5.2 Side-Hinged Exterior Doors and Sidelites

5.2.1 Scope

This section presents additional details specific to side-hinged exterior doors, sidelites, and exterior bi-fold doors (a.k.a. folding wall) to determine a total product U-factor.

This section presents and references methods for determining specific heat transfer properties and areas used in the determination of these properties for exterior doors, sidelites, and exterior bi-fold doors. These values shall be determined using one of three methods listed below. Manufacturers may choose to perform their simulations using any of the techniques applicable to their specific product.

5.2.1.1 Simplified Door Rating (SDR) Method

The Simplified Door Rating (SDR) method is described in detail in Section 5.2.5.1 and shown in Figure 5-10.

Products Eligible for the SDR Method:

- A. Skinned slabs with a foam, wood, or other core;
- B. Wood stile and rail doors;
- C. Composite assemblies comprised of a side-hinged exterior door slab with a sidelite slab within a single frame (see Composite Assembly definition in Section 3). If the side-hinged exterior door or sidelite are not offered as individual products, the SDR methodology may be used to determine the U-factor of the side-hinged exterior door slab with a default or proprietary frame/sill;

- D. Slab sidelites within a proprietary and/or default frame/sill.

5.2.1.2 Detailed Door Rating (DDR) Method

The Detailed Door Rating method utilizes basic NFRC techniques and is described in detail in Section 5.2.5.2.

A side-hinged exterior door system which is configured to only support a full-lite option, shall be permitted to be modeled using the standard techniques (as for windows) described in Section 5.1 or Section 5.11. Product Line Grouping and simplifications that are allowed in Sections 5.2.2 through 5.2.4 may be applied to these systems. These systems typically use extruded or moulded profiles (aluminum, fiberglass, vinyl, wood, etc.) and can only support the glass size dictated by the profiles.

Adding embossed/raised panels to an existing factory assembled full-lite product line does not require re-simulation of the full-lite option; however, the SDR or DDR method shall be used to simulate and calculate U-factors for the opaque, 1/4, 1/2, and 3/4 lite options, as applicable (e.g. manufacturer is adding a 1/2 lite option so they are only required to simulate the 1/2 lite).

5.2.2 Variations from Standard Product Lines

A given series of side-hinged exterior door or sidelite assemblies is defined by skin material, core material, and edge-of-door construction that are allowed to differ by:

- A. Size;
- B. Embossed/raised panel and cut out configurations;
- C. Products with multiple slab thickness;
- D. Products with multiple embossed/raised panel thickness (i.e. different thicknesses of wood panels, or different depth of embossments);
- E. The replacement of core and/or embossed/raised panel area with glazing system;
- F. Center-of-lite characteristics and edge-of-lite characteristics, such as glazing types, gap widths, glazing lite areas, use of dividers, use of spacers, glazing coatings, gas fills;
- G. Operable/non-operable configurations, e.g. X, O, XX, XO, OXXO etc.;
- H. In-swing or out-swing operation;

- I. Door slab changes where one component of the same physical shape with a thermal conductivity that does not differ by more than a factor of 10;
- J. Frame components, e.g. headers, jambs and threshold; and
- K. Variations in frame and/or door interior/exterior finish, paint, varnish, or stain do not constitute different product lines provided that each of these variations does not change the surface emittance by more than 0.10.

5.2.3 Variations from Standard Individual Products

- A. Products with a pre-installed storm door from the manufacturer shall be rated with the storm door and associated parts removed from the assembly, or be rated as Test Only for each storm door with side-hinged exterior door embossed/raised panel/glazing configuration;

Exception: full-lite swinging door with a pre-installed full-lite storm door may be rated using simulation;

- B. Doors which are designed to be installed in a variety of glazed wall systems shall be rated in the glazed wall system framing in which it is installed and using the Side-Hinged Exterior Door product type. The glazing shall be removed from the glazed wall system (non-door side) and replaced with either a block of wood or a closure panel applicable to the product, as specified by the manufacturer. (See Figures 5-11 and 5-12).

If the door utilizes an additional frame which is inserted into the glazing pocket of the glazed wall system (typically termed an insert frame), the door shall be rated using only the insert frame and shall not include the primary glazed wall framing in which the insert frame is installed (See Figures 5-11 and 5-13).

- C. A door or sidelite slab without a frame shall be rated using default frame components. However, products with the same slab and different proprietary frames shall be treated as individual products within one product line. All frame options shall be individually modeled or grouped.
- D. Products with multiple sill options, where the sill design changes to accommodate different installation requirements, made of the same materials type shall be different individual products within the same product line.

5.2.4 Variations from Standard Simulation and Test Conditions

This section presents rules that may be used to reduce the number of simulations of individual products necessary to represent a product

line. These rules may be used either with the product line validated simulation procedure (see Section 4.1.1) or with the testing alternative (see Section 4.1.2).

A door offered with one or more door slabs shall be rated in the configuration with the least number of slabs (i.e. single door) of the same style or model. If a door is not offered in a single or double unit, a representative double unit shall be rated, incorporating the two end most slabs and a representative intermediate vertical member, as determined and reported by the simulator.

For opaque doors with flat, raised, or embossed panels, a 6-panel layout shall be representative of all panel doors (regardless of the number of panels). This layout may also be considered representative of flush doors. See Figure 5-3 for a typical 6-panel layout. A specific 6-panel layout which is required for the SDR method and may be used as a default pattern in any other case is shown in Figure 5-10.

When simulating U-factors where a decorative lite (continuous or non-continuous) is used, the decorative lite glass shall be assumed to have the same properties as clear glass of the same glass thickness and each decorative lite coming pattern shall be considered to be a different individual option or the optional coming pattern as shown in the Table 5-1 may be used to represent all decorative lite coming patterns. The default coming profile may be used to represent any coming profile.

Default and/or proprietary components may be used at the manufacturer's discretion for door slab and/or slab sidelites. These can be used to represent proprietary frames (with the limitations noted below). (See Reference 2 for drawings):

A. Default Frame Components (Head and Jambs)

- i. Default Wood Frame: (Representative of any wood, vinyl, or composite material frame) 115 mm (4.56 in) softwood single rabbeted frame of 8% to 12% moisture content, with a specific gravity of 0.35 to 0.45, with a dual durometer plastic compression weatherstrip and flexible sweep. The default door sill shall be a standard combination wood/aluminum sill (where the aluminum does not extend to the interior) that performs as well or better than the default door sill illustrated in Figure 5-8a;
- ii. Default Steel Frame: (Representative of any steel frame, or other metal of equal or lower conductivity) 145 mm (5.75 in) - 16 Ga. pressed painted steel frame with a minimum 120 mm (4.75 in) throat depth, applied weather-strip. The frame shall consist of a head jamb, hinge jamb, lock jamb, and reinforcement for hinges and

locks. See Figure 5-4 and Figure 5-5 for the default head and side jambs.

When using the default steel frame, it is required to use the default non-thermal sill per 5.2.4.B.ii and Figure 5-8b).

B. Default Sill Components

- i. Default Thermally Broken Aluminum Sill (Representative of any thermally broken aluminum sill with similar construction or non-metal sill): A standard combination wood/aluminum sill as illustrated in Figure 5-8a;
- ii. Default Non-Thermal Sill (Representative of any non-thermally broken metal sill): A standard aluminum non-thermally broken sill with a sill wall thickness of 1.4 mm to 1.6 mm (0.055 in to 0.065 in) and no substrate as illustrated in Figure 5-8b;

C. Default Door Lite Frame (Representative of any non-metal door lite frame). A polypropylene door lite frame as illustrated in Figure 5-9;

D. Default Caming Profile (See Reference 2).

E. Default SDR foam and wood materials used around the perimeter shall be as follows:

- i. Polyurethane Foam Insulation: 0.024 W/m·K (0.166 Btu·in/hr·ft²·F);
- ii. Expanded Polystyrene: 0.038 W/m·K (0.263 Btu·in/hr·ft²·F);
- iii. Hardwood: 0.160 W/m·K (1.109 Btu·in/hr·ft²·F)

F. Allowable SDR door slab dimensions:

- i. Door slabs thickness shall be 44mm ± 2mm (1.75" ±0.079")
- ii. Steel Skin thickness shall be no greater than 0.6mm (0.024")
- iii. Fiberglass skin thickness shall be no greater than 1.9mm (0.075")

Add-Ons

If a manufacturer wishes to simulate a door or sidelite slab in multiple frames, either proprietary or default the manufacturer may either simulate all individual products in the matrix or develop an add-on for the additional frames. To develop the frame add-on, all the individual products in the matrix shall be simulated in the best performing

framing system. The best performing product in the best performing framing system shall then be simulated in the additional frame options. The difference between these two U-factors shall be the frame add-on. The U-factor for the products in the additional frame shall be the U-factor for that product in the best performing frame plus the frame add-on.

For manufacturers offering multiple sill options:

- A. Sill systems that meet the requirement of a thermally broken member shall use the product values for the NFRC default sill system;
- B. Sill systems that are metal and do not meet the requirement of a thermally broken member may be given total product U-factor of $0.10 \text{ W/m}^2\cdot\text{K}$ ($0.02 \text{ BTU/h}\cdot\text{ft}^2\cdot\text{F}$) higher than the same door system option with the NFRC default sill system.

5.2.5 Calculation of Total Product Rating

Total fenestration product U-factors for model sizes and configurations shall be calculated in accordance with Section 5.2.5.1 for the Simplified Door Rating (SDR) method and with Section 5.2.5.2 for the Detailed Door Rating (DDR) method.

To reduce the number of individual products necessary to represent a product line, refer to the guidelines prescribed in Sections 4.2.4, 5.2.2, 5.2.3 and 5.2.4.

5.2.5.1 Simplified Door Rating (SDR) Method

- A. Modeling of opaque side-hinged exterior doors or sidelites is based on using a six-panel or flush configuration door product area.
 - i. Modeling of glazed side-hinged exterior doors will consist of two elements, the door opaque area (slab, frame, and sill); plus, the Door Glass Assembly Area (DGAA);
 - ii. The opaque door area (that is, the area outside the DGAA, including door frame and sill) shall be simulated in five configurations, calculated per Equation 5-2, for the opaque, $\frac{1}{4}$ lite, $\frac{1}{2}$ lite, $\frac{3}{4}$ lite, and full-lite opaque areas;
 - iii. The DGAA of the door shall be simulated using 4 configurations, calculated per Equation 5-3, at the $\frac{1}{4}$ lite, $\frac{1}{2}$ lite, $\frac{3}{4}$ lite and full-lite sizes (See Figure 5-10 of door slab with various panel sizes);

- B. The total product U-factor will be calculated, per Equation 5-4, by adding the product of the glazed assembly ($U_{DGAA}A_{DGAA}$), and the product of the remaining opaque door or sidelite slab assembly ($U_{sd}A_{sd}$) divided by the total product area, where:

$$U_{sd}A_{sd} = [(U_fA_f) + (U_{dc}A_{dc}) + (U_pA_p) + (U_{ep}A_{ep})]$$

Equation 5-2

$$U_{DGAA}A_{DGAA} = [(U_{lf}A_{lf}) + (U_dA_d) + (U_{de}A_{de}) + (U_{eg}A_{eg}) + (U_cA_c)]$$

Equation 5-3

Note: U_{DGAA} and A_{DGAA} shall be determined using WINDOW.

$$U_t = \frac{[(U_{sd}A_{sd}) + (U_{DGAA}A_{DGAA})]}{A_t}$$

Equation 5-4

Where

U_f	=	Frame U-factor
A_f	=	Frame area
U_{lf}	=	Lite frame U-factor
A_{lf}	=	Lite frame area
U_d	=	Divider U-factor
A_d	=	Divider area
U_{de}	=	Edge-of-divider U-factor
A_{de}	=	Edge-of-divider area
U_{eg}	=	Edge-of-lite U-factor
A_{eg}	=	Edge-of-lite area
U_c	=	Center-of-lite U-factor
A_c	=	Center-of-lite area
U_{dc}	=	Door or Sidelite core U-factor
A_{dc}	=	Door or Sidelite core area
U_p	=	Panel U-factor
A_p	=	Panel area
U_{ep}	=	Edge-of-panel U-factor
A_{ep}	=	Edge-of-panel area

U_{DGAA}	=	Doorglass Assembly Area U factor
A_{DGAA}	=	Doorglass Assembly Area at ¼ Lite, ½ Lite, ¾ Lite, Full-Lite
U_{sd}	=	U-factor of Door Slab & Frame/Sill Opaque area
A_{sd}	=	Opaque Area of NFRC Model Size Swinging Door, or Sidelite, for 1/4 lite, 1/2 lite, 3/4 lite, full-lite and complete opaque configurations
U_t	=	Total Product U-factor
A_t	=	Total area

5.2.5.2 Modeling using the Detailed Door Rating (DDR) Method

The Detailed Door Rating Method total door system U-factor shall be calculated as outlined below:

- A. Determine all of the following, as applicable, using the approved 2-D heat transfer computational program for all frame, panel, and core modeling and WINDOW for the center-of-lite U-factor:
 - i. Panel(s) U-factor;
 - ii. Edge-of-panel U-factor;
 - iii. Door core U-factor;
 - iv. Center-of-lite U-factor using WINDOW;
 - v. Lite frame U-factor;
 - vi. Edge-of-lite U-factor;
 - vii. Divider U-factor;
 - viii. Edge-of-divider U-factor;
 - ix. Frame U-factor;
 - x. The component areas of:
 - (a) Frame area
 - (b) Lite frame area
 - (c) Divider area
 - (d) Edge-of-divider area
 - (e) Edge-of-lite area
 - (f) Center-of-lite area
 - (g) Door core area

- (h) Panel area
 - (i) Edge-of-panel area
 - (j) Projected total door system area
- B. Perform the following calculations as shown in Equation 5-5:
- i. Multiply the center-of-lite, divider, edge-of-lite, edge-of-divider, panel, door core, lite frame, edge-of-panel, and frame U-factors by their corresponding areas;
 - ii. Total these nine quantities; and
 - iii. Divide this total by the projected total exterior door system area to produce computed total door system product U-factors for all the door systems in the matrix of required U-factors.

$$U_t = \frac{\left[(U_f A_f) + (U_{lf} A_{lf}) + (U_d A_d) + (U_{de} A_{de}) + (U_{eg} A_{eg}) + (U_c A_c) + (U_{dc} A_{dc}) + (U_p A_p) + (U_{ep} A_{ep}) \right]}{A_t}$$

Equation 5-5

Where the variables are defined in Section 5.2.5.1 above.

5.2.6 Baseline Product

- A. The simulation report shall include simulation results for the exact option as tested.
- B. For representative production line specimens; doors, sidelites, and transoms of the complete system (slab, frame, and sill) shall be within ± 25 mm (1 in) of the appropriate model size listed in Table 4-3.
- C. For door and sidelite product lines which include glazed options, the baseline product shall be a 1/2 Lite product with a height/width tolerance of the glazing to be within ± 13 mm (0.5 in) of the dimension listed in Figure 5-10.


Table 5-1 – Glazing and Divider Patterns for Doors

Individual Product	For Doors with¹	For Sidelites with¹	Simulate or Test with Daylight Opening Size	Optional Caming Pattern
1/4 glazing	glazing < 0.265 m ² (411 in ²)	glazing < 0.042 m ² (65 in ²)	534 mm x 457 mm (21 in x 18 in)	5 vertical 1 horizontal
1/2 glazing	0.265 m ² ≥ glazing < 0.581 m ² (411-901 in ²)	0.042 m ² ≥ glazing < 0.181 m ² (65-281 in ²)	534 mm x 889 mm (21 in x 35 in)	5 vertical 8 horizontal
3/4 glazing	0.581 m ² ≥ glazing < 0.710 m ² (901-1101 in ²)	0.181 m ² ≥ glazing < 0.252 m ² (281-391 in ²)	534 mm x 1194 mm (21 in x 47 in)	5 vertical 10 horizontal
Full glazing	glazing ≥ 0.710 m ² (1101 in ²)	glazing ≥ 0.252 m ² (391 in ²)	534 mm x 1600 mm (21 in x 63 in)	5 vertical 13 horizontal

¹ Designated glazing areas are for the daylight opening size in the actual product and are not based on the model sizes from Table 4-3.


5.2.7 Figures

Figure 5-1a – Exterior Steel/Composite Door System – Vertical Elevation in Steel Frame

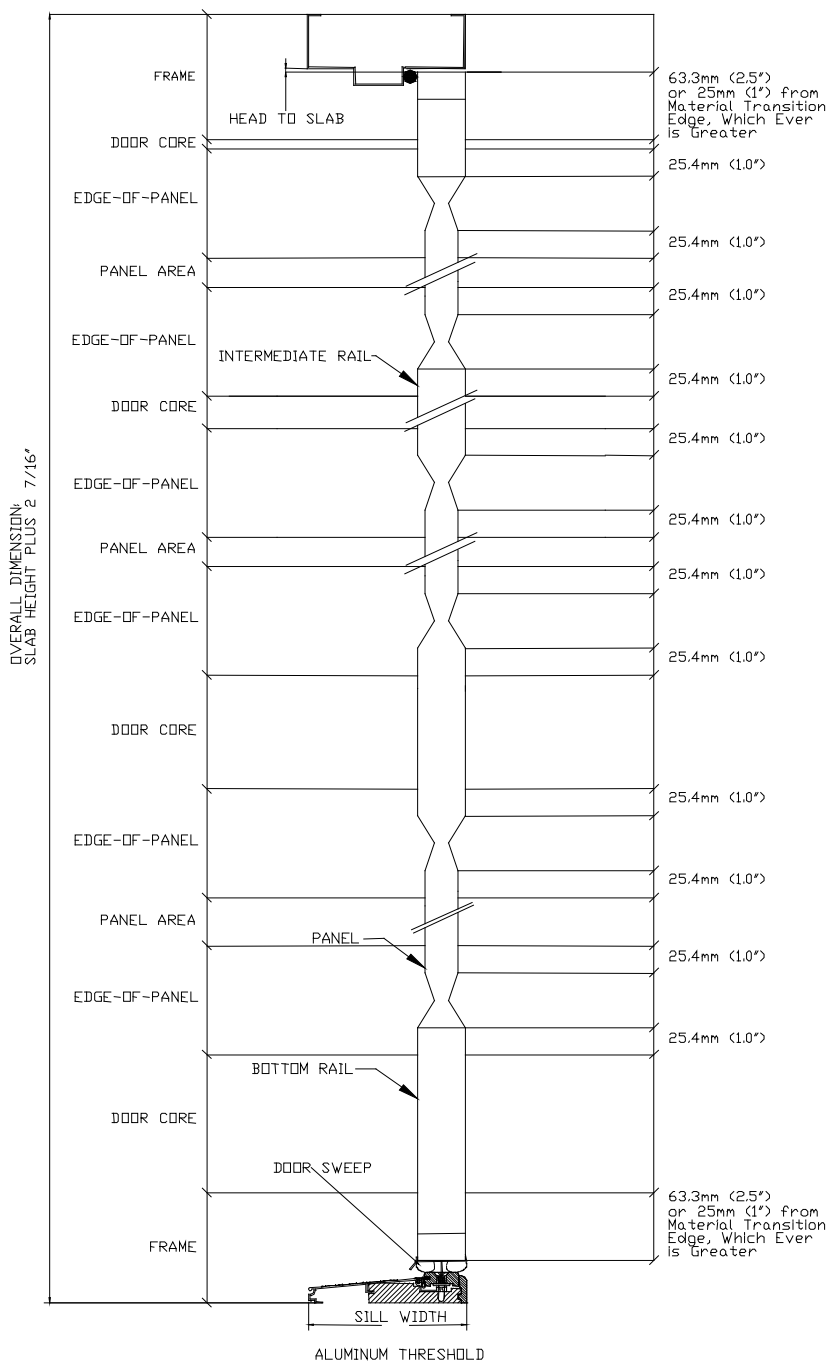


The projected door area is the rough opening area less installation clearances. Sidelite area schematic may be identical or similar without perimeter weatherstrip and bottom sweep.

Figure 5-1b – Exterior Steel/Composite Door System – Vertical Elevation in Wood Frame

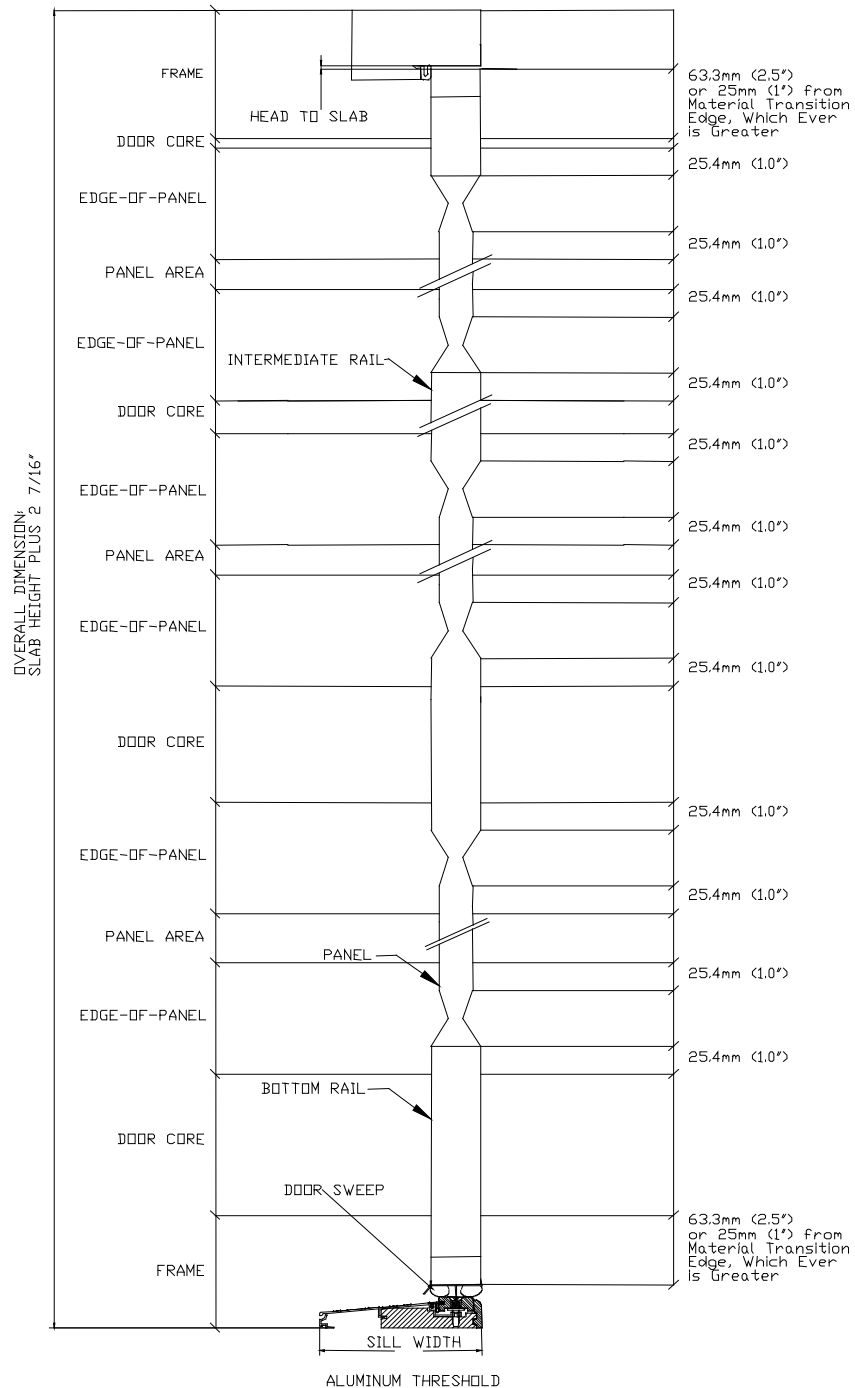

The projected door area is the rough opening area less installation clearances. Sidelite area schematic may be identical or similar without perimeter weatherstrip and bottom sweep.

Figure 5-2 – Exterior Wood Door System – Vertical Elevation

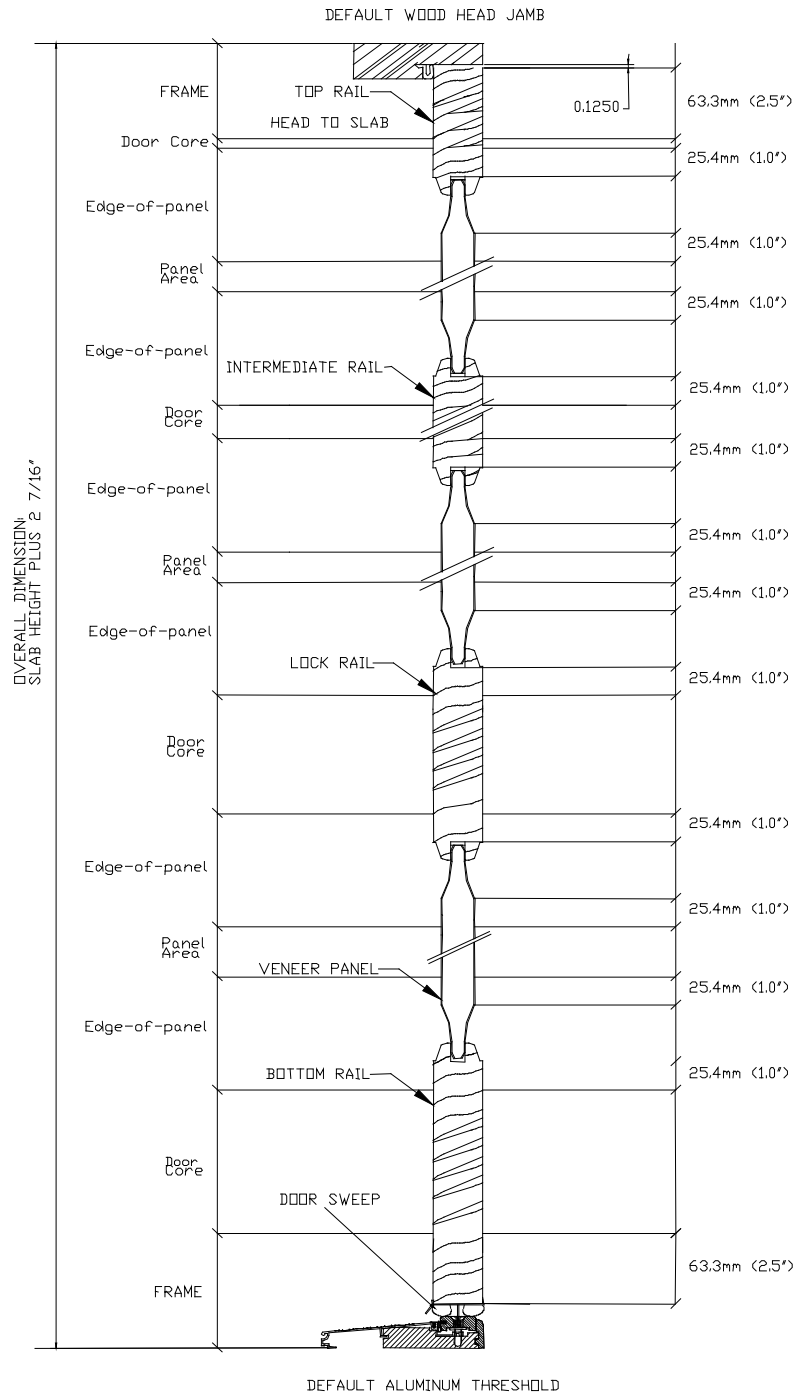

The projected door area is the rough opening area less installation clearances. Sidelite area schematic may be identical or similar without perimeter weatherstrip and bottom sweep.

Figure 5-3 – Typical 6-Panel Layout

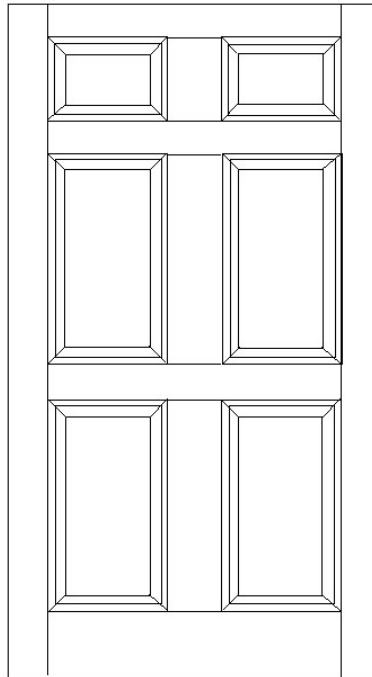


Figure 5-4 – Common Pressed-Steel Frame – Single Unit Type Pressed-Steel Frame


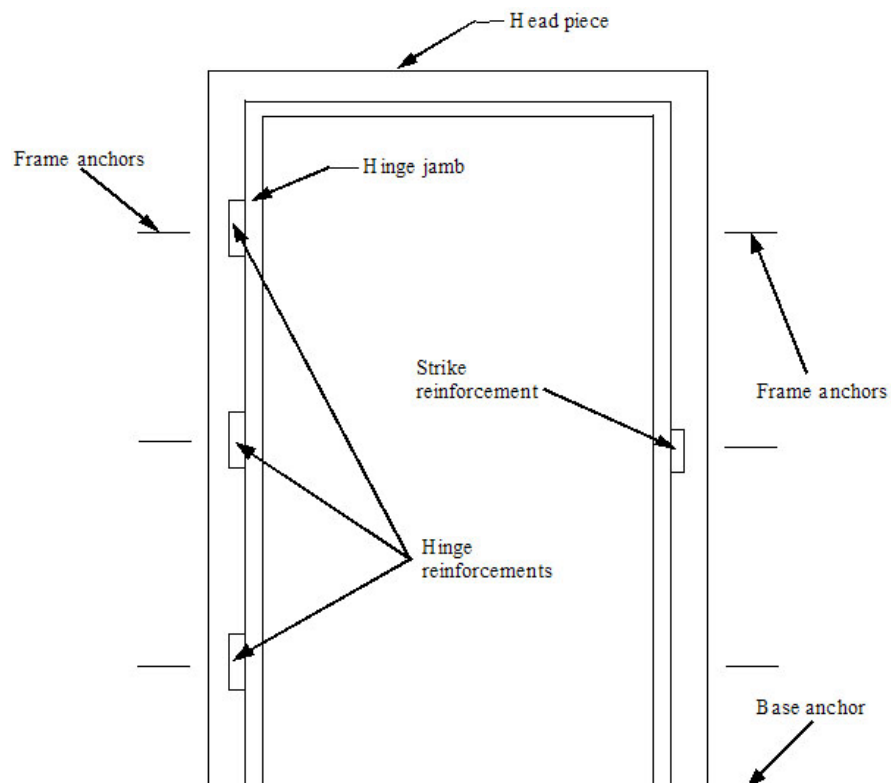


Figure 5-5 – Frame Cross Section

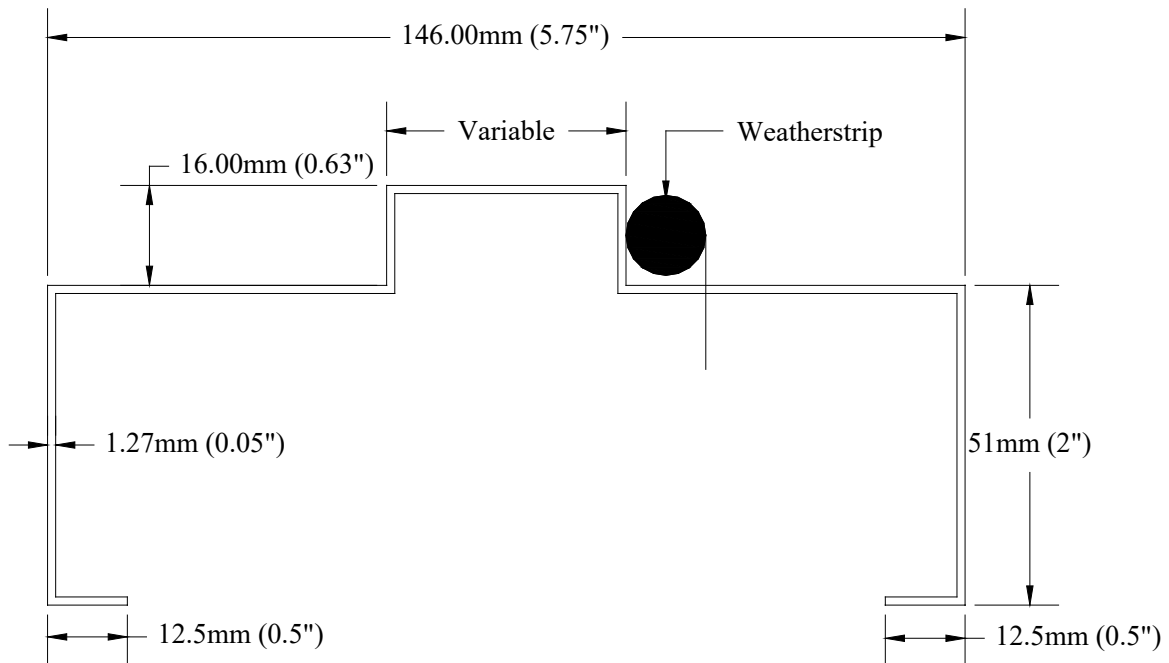

Pressed Steel Frame Specification (16 G)

Pressed Steel Frame Specification

Single-unit type pressed steel frames shall consist of a head, a sill and two jamb pieces, hinge reinforcements, a strike plate reinforcement, and base and wall anchors

The wall anchors provided shall be adjustable or fixed masonry anchors, bolts with expansion shells, channel clips, "Z" clips, wood stud anchors, or steel anchors.

The head and jamb pieces shall be constructed, as shown in Figure 5-4.

Figure 5-6 – Wood Default

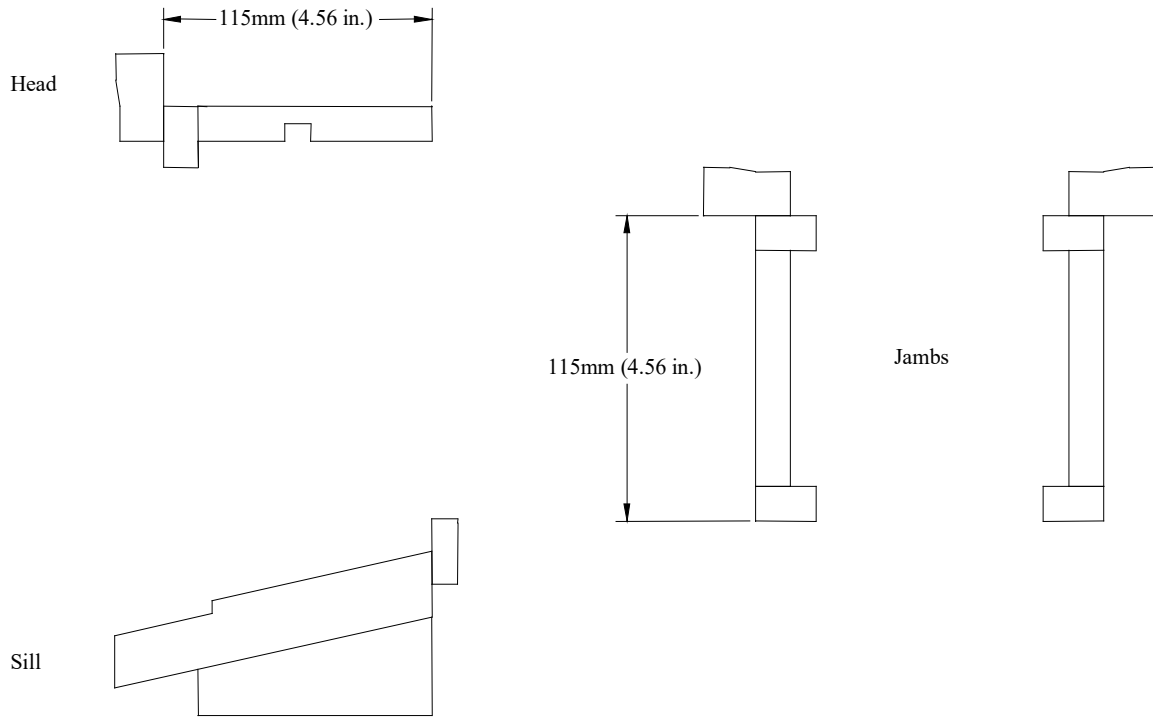


Figure 5-7 – Default Wood Door Head Jamb and Side Jamb

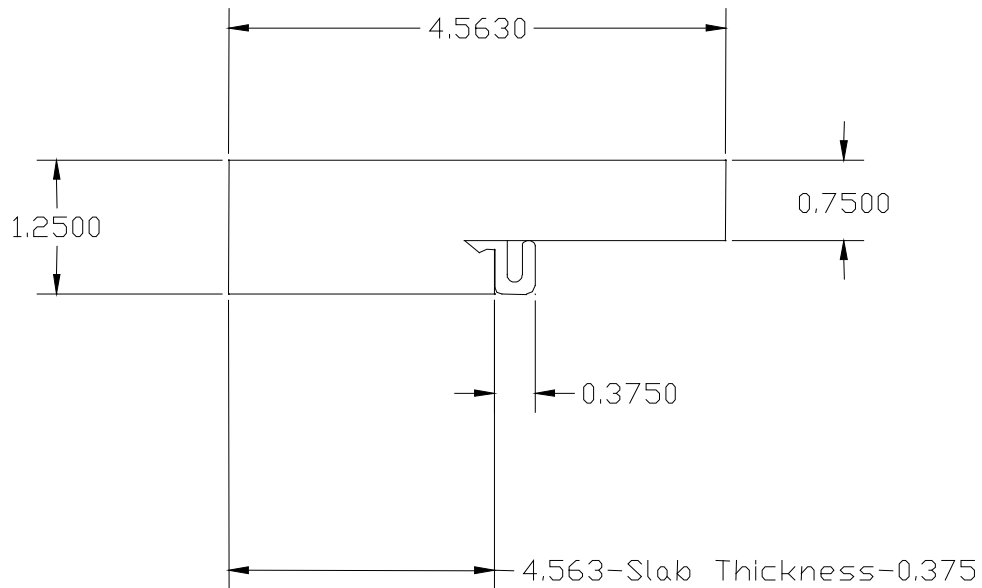


Figure 5-8a – Default Thermally Broken Aluminum Door Sill

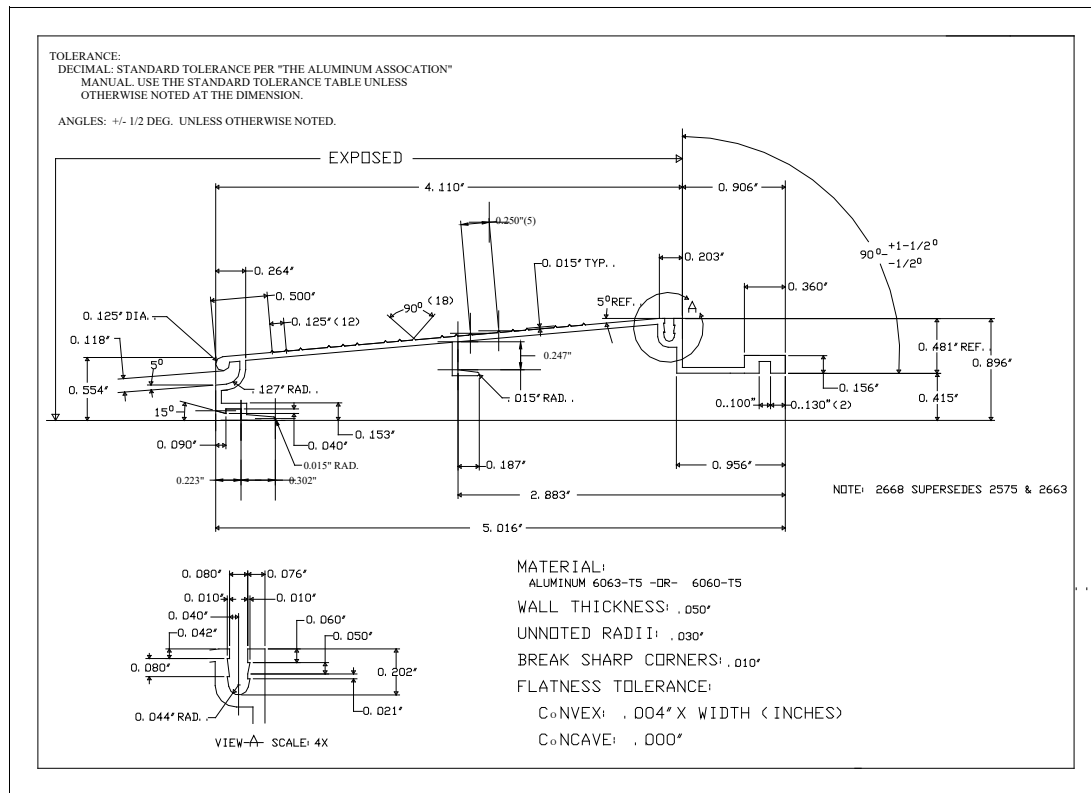
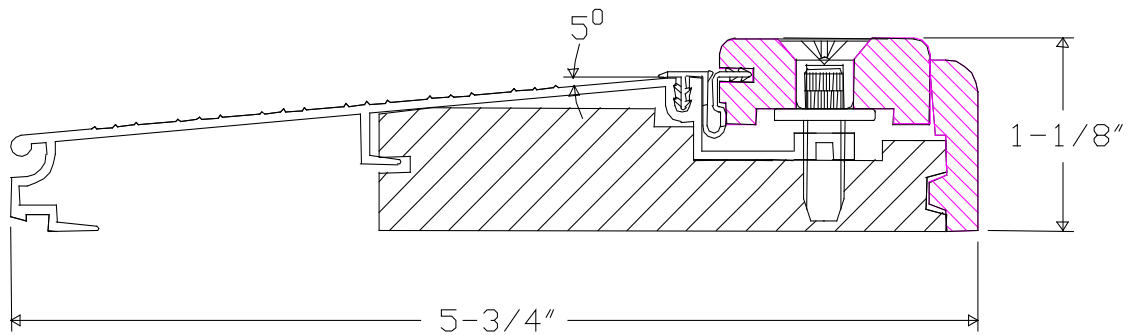


Figure 5-8b – Default Non-Thermal Door Sill


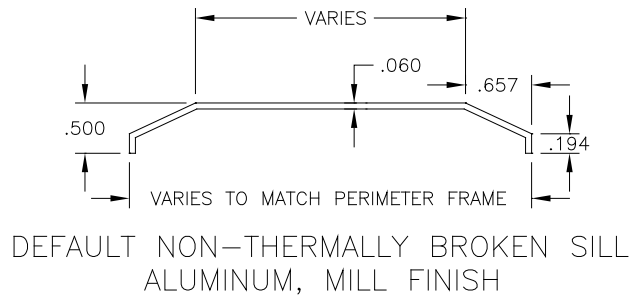


Figure 5-9 – Default Door Lite Frame

The following illustration shall be used. To make a specific IG width fit properly, extend or extract the material of the horizontal legs, as identified below.

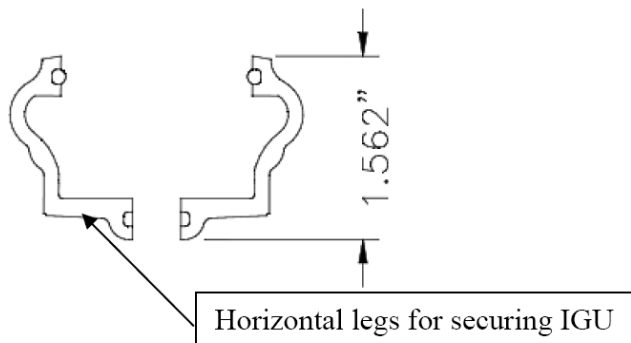

A door lite frame DXF file is available on the NFRC website.

Figure 5-10 – SDR Configurations of Single Door or Sidelights

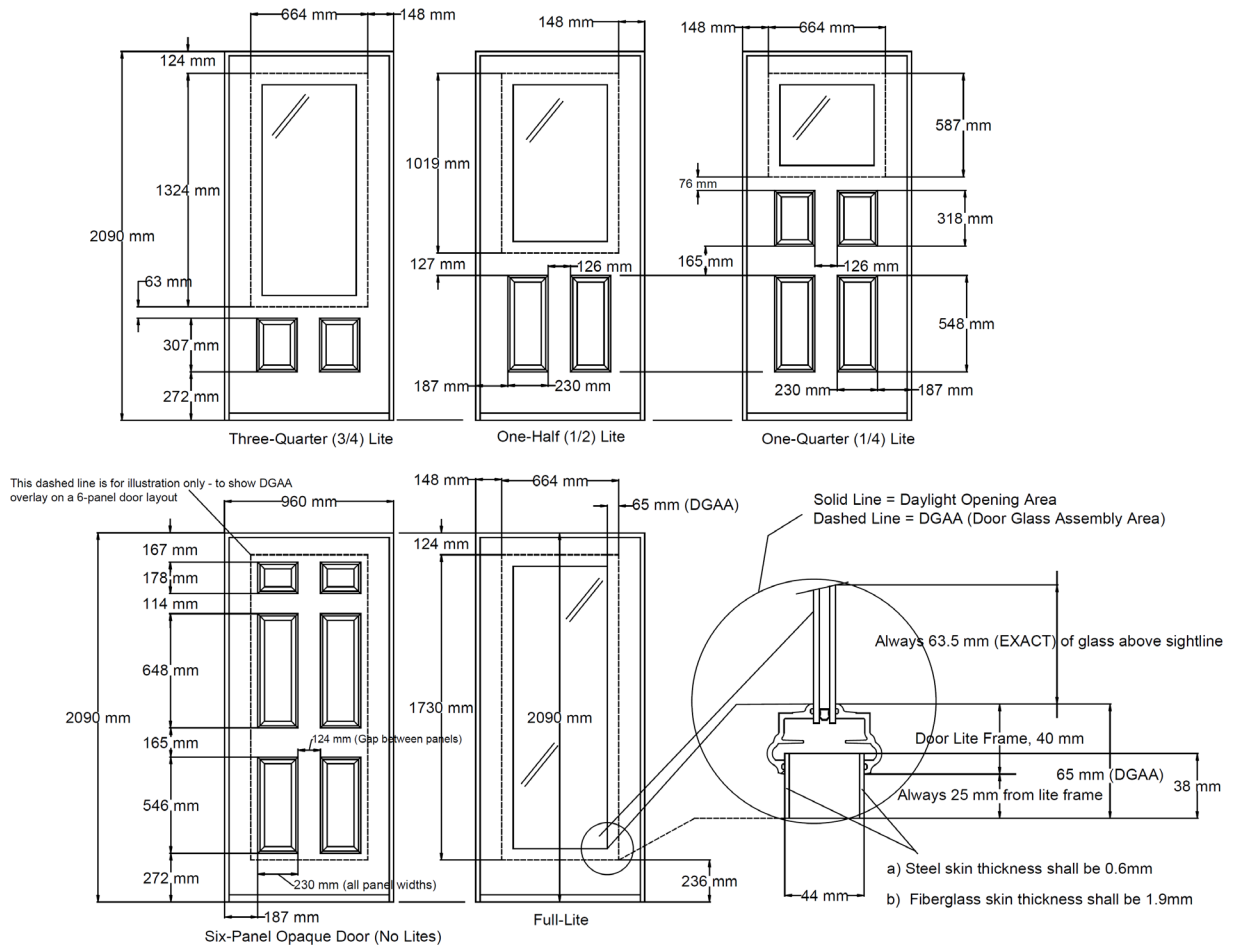


Figure 5-11 – Commercial Door Example in a Glazed Wall System

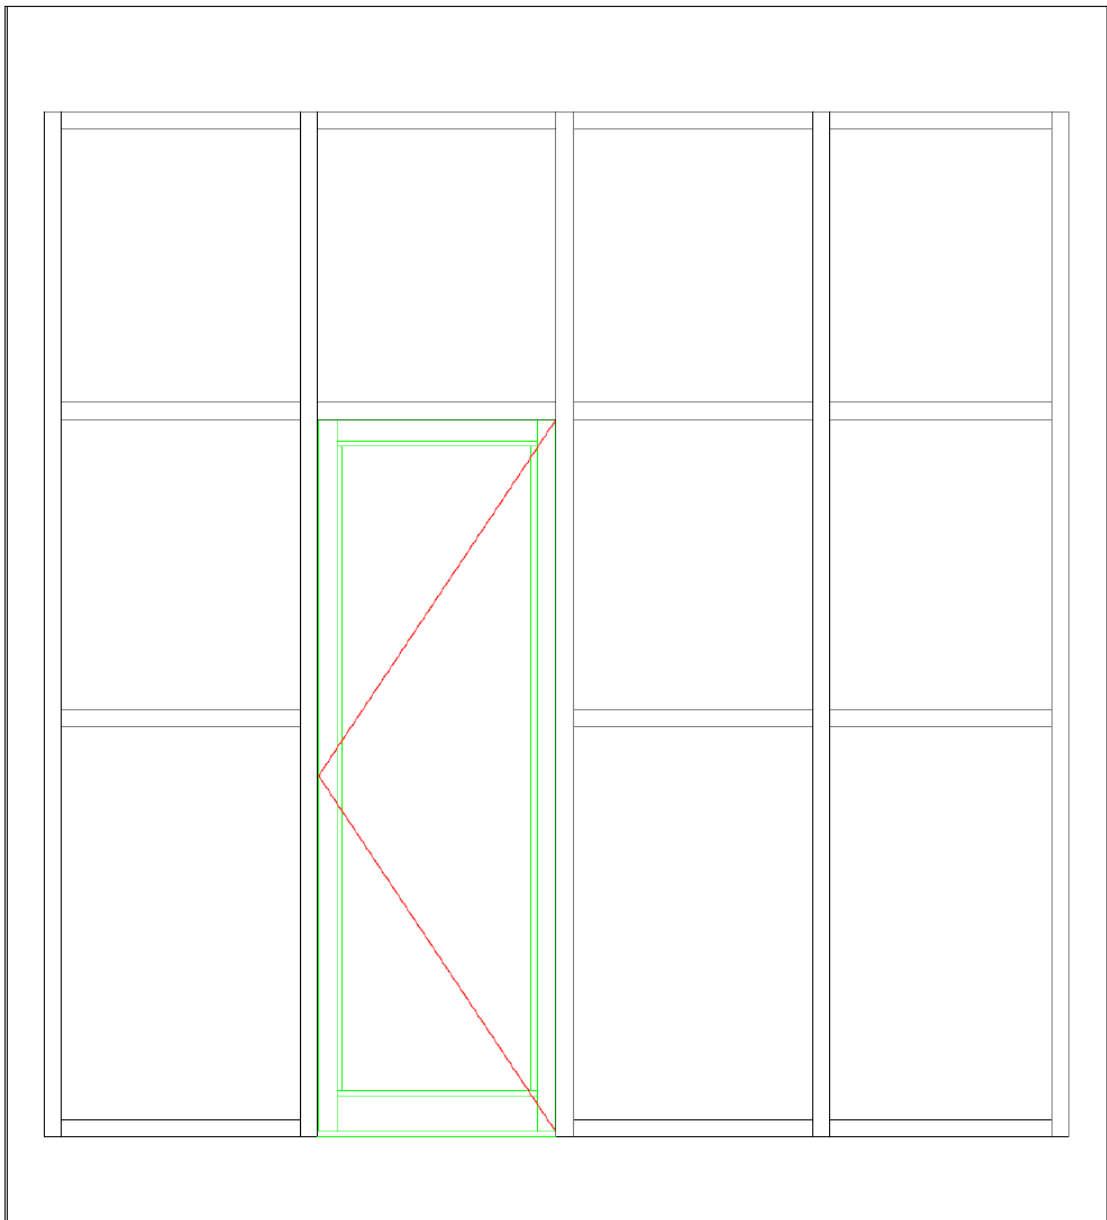


Figure 5-12 – Door Inside Glazed Wall System


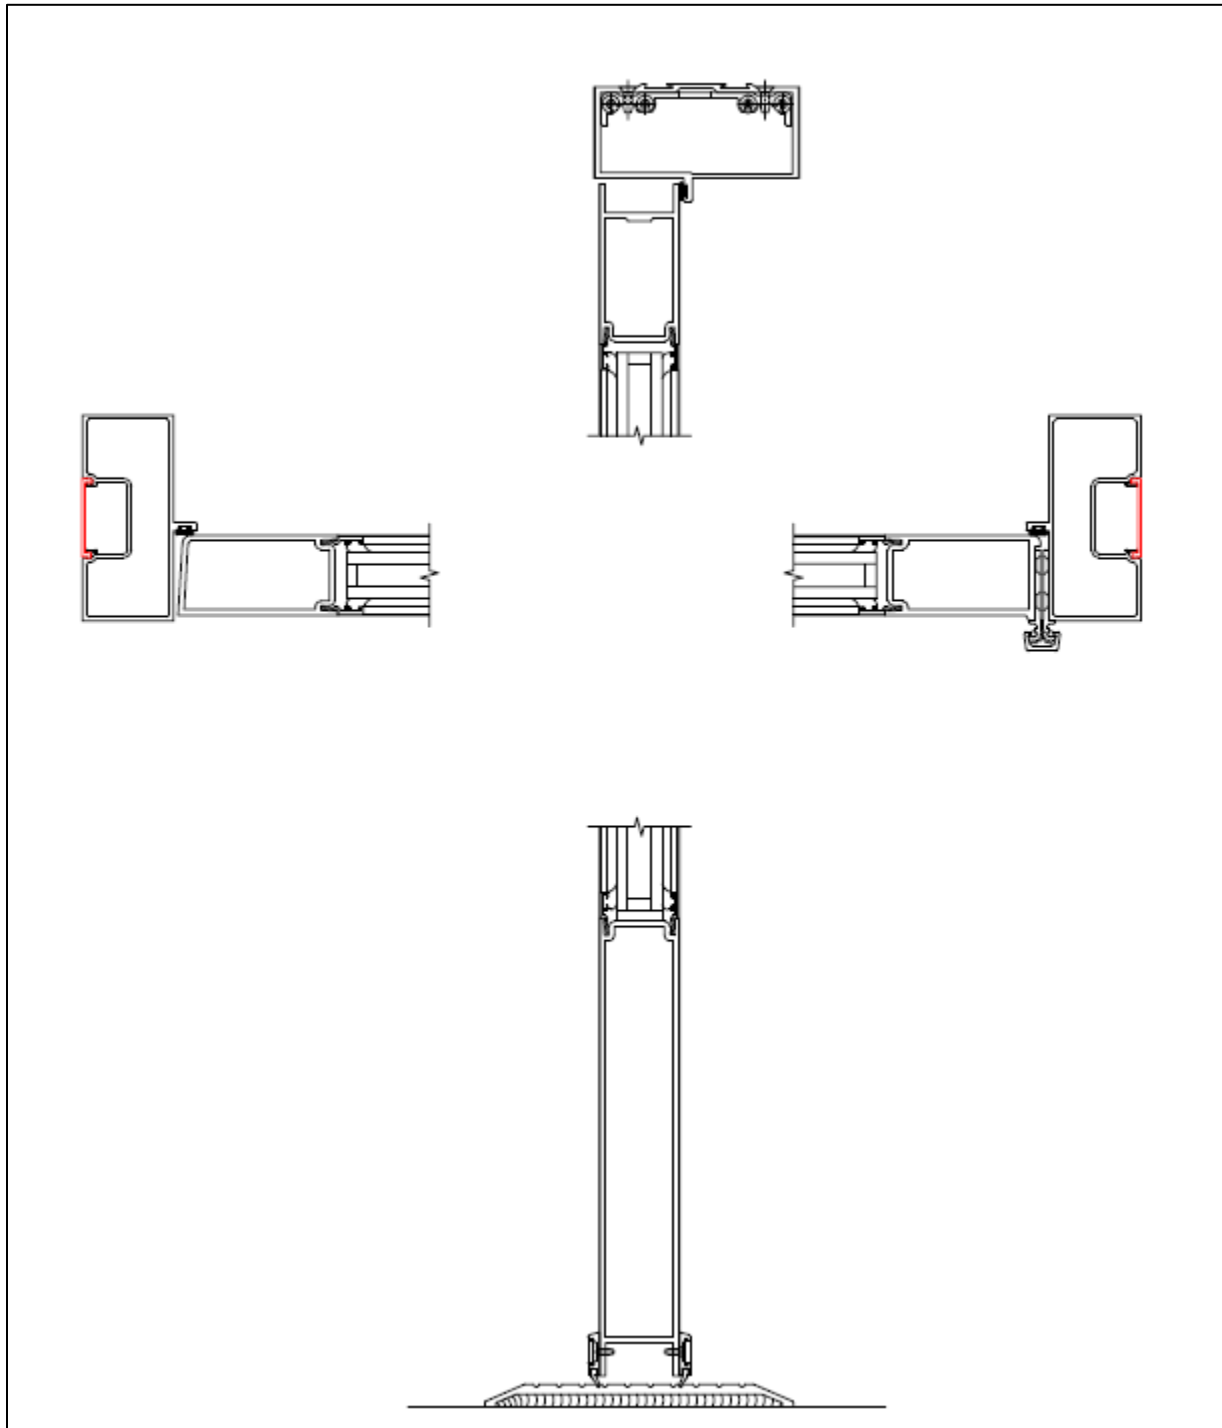


Figure 5-13 – Door Inside Glazed Wall System

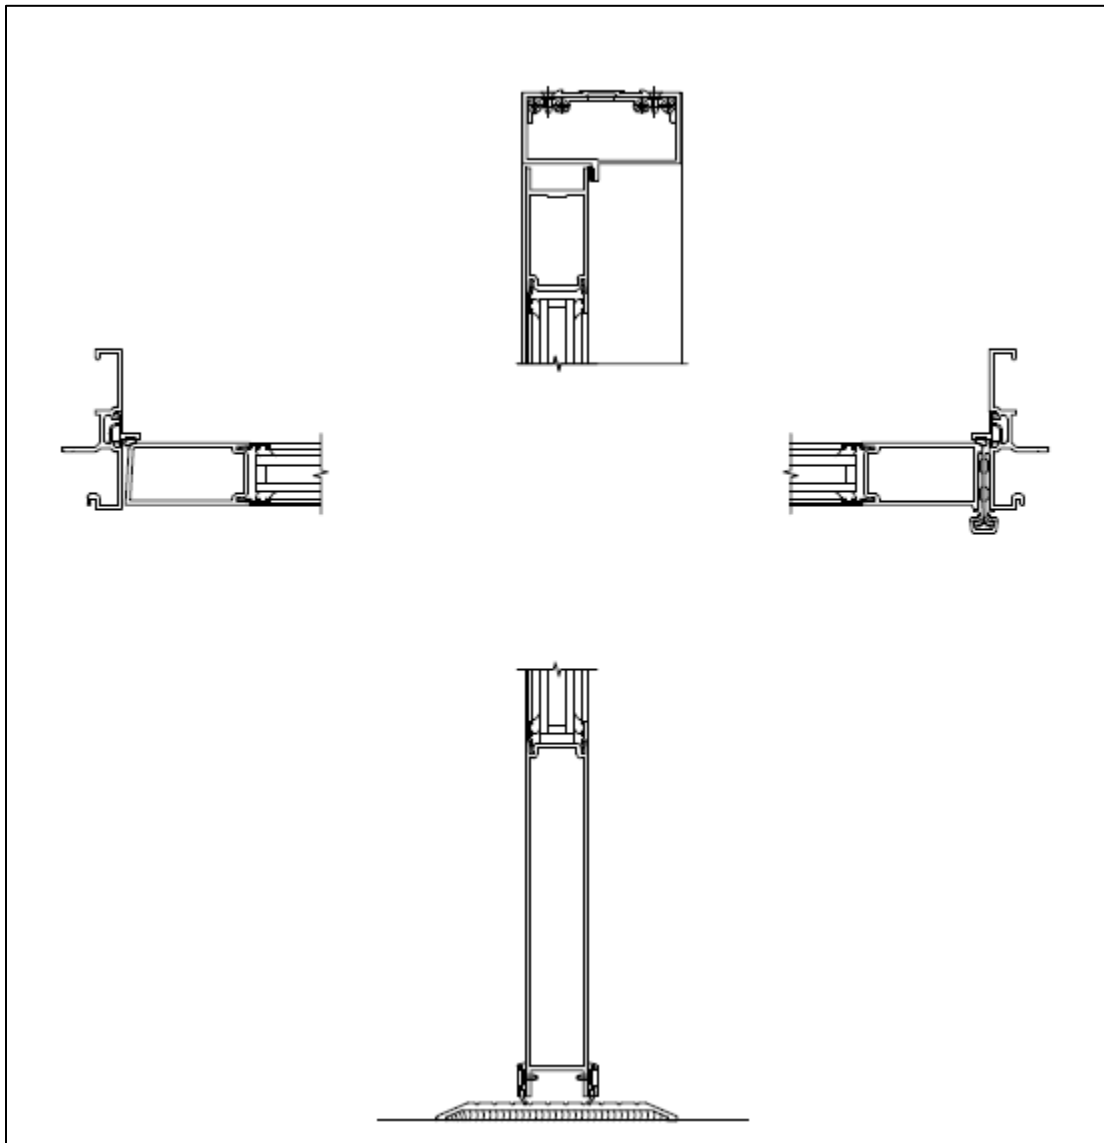

5.3 Skylights

5.3.1 Scope

This section presents additional details specific to skylights.

This section presents and references methods for determining specific skylight system heat transfer properties or quantities used in the determination of these properties. At this time, the scope of these properties is limited to the total skylight system U-factor. For additional simulation parameters see Reference 2.

5.3.2 Variations from Standard Product Lines

The method in which skylights are mounted will affect the U-factor of the skylight. Mounting variations include roof mount or inset mount, which shall be different product lines.:

A skylight with an interior diffuser is rated with the interior tube and/or diffuser removed from the assembly. Any solar tracking devices or other auxiliary elements shall also be removed for rating purposes.

5.3.3 Variations from Standard Individual Products

None

5.3.4 Variations from Standard Simulation and Test Conditions

Skylights and other sloped glazing products shall be simulated and rated at a slope of 20° above the horizontal. For determining validation of the baseline product only, skylights and other sloped glazing products shall be simulated and tested in a vertical position. Ratings for test only products shall be converted to the 20° slope from the vertical position by multiplying the tested value at vertical by 1.20.

5.3.5 Calculation of Total Product Rating

The total fenestration product U-factor shall be calculated as outlined in Section 5.1.5.

5.3.6 Figures

None

5.4 Tubular Daylighting Devices (TDD)

5.4.1 Scope

This section presents and references methods for determining specific TDD system heat transfer properties or quantities used in the determination of these properties. At this time, these products can only be rated using the testing alternative procedure (Section 4.1.2).

The specific details for testing TDDs are outlined in Appendix 3 of NFRC 102.

5.4.2 Variations from Standard Product Lines

A TDD product line shall only consist of individual products of the same tube material, exterior dome material, and interior diffuser material.

5.4.3 Variations from Standard Individual Products

None

5.4.4 Variations from Standard Simulation and Test Conditions

5.4.4.1 Orientation

U- TDDs shall be rated with the tube in a vertical orientation (see Figures 5-14a and 5-14b). Therefore, the heat flow shall be in the vertical direction. Standardized rating conditions are defined in Section 5.4.4.4.

5.4.4.1.1 Insulation at Ceiling Configuration

The diffuser is attached to the insulated ceiling. The tubular section is located in the attic space connecting the interior diffuser to the exterior dome. The exterior dome/flashing assembly is mounted to the roof deck.

5.4.4.1.2 Insulation at Roof Configuration

The diffuser is attached to the tubular section which is located in the interior space. The tubular section is connected to the exterior dome. The exterior dome/flashing assembly is mounted to the insulated roof deck.

5.4.4.2 Sizes

The TDD model size listed in Table 4-3 is based on the Thermal Opening Area, as defined in Section 3. For the purpose of testing, this is the interior side of the 254 mm (10 in.) foam panel. The TDD model size is 350 mm +/- 30mm (14 in +/- 1 in) diameter tube opening. The closest production size to the model size shall be tested. In the event that the device is not manufactured in the model size, the production size with the closest area (as defined in 5.4.4.3) shall be used and the result for that unit shall be the product's rating. For TDD products with non-circular

Thermal Opening Area, the product shall use an opening area equivalent to the actual size of the manufactured product as tested. Equation 4-1 shall not be used to adjust the results to model size.

5.4.4.3 Tubular Daylighting Device Area

The U-factor for all TDDs shall be based on the Thermal Opening Area, as defined in Section 3. This area shall be used when calculating the total product U-factor.

5.4.4.4 Standard Testing Conditions

5.4.4.4.1 Insulation at Ceiling Configuration

- A. 750 mm (30 in) shaft length (interior ceiling line to exterior roof line);
- B. Ceiling insulation shall be represented by a surround panel, 250mm (10 in) in depth;
- C. An exterior 13 mm (0.5 in) thick plywood roof deck, painted to limit moisture transfer;
- D. ASHRAE attic space boundary conditions on the exposed surface of the vertical shaft material, from the top of the insulation material to the underside of the 13 mm (0.5 in) plywood roof deck;
- E. Exterior boundary conditions applied to the exposed surface of the dome; and
- F. Bottom of the tubular skylight covered with a light diffusing plate (manufacturer specific).

5.4.4.4.2 Insulation at Roof Configuration


- A. 750 mm (30 in) shaft length (from the exterior roof line to the top of the diffuser);
- B. Roof insulation shall be represented by a surround panel, 250mm (10 in) in depth;
- C. Exterior boundary conditions applied to the exposed surface of the dome; and
- D. Bottom of the tubular skylight covered with a light diffusing plate (manufacturer specific).

5.4.4.5 Calculation of Total Product Rating

The total TDD system U-factor shall be determined as noted in Appendix A3 of NFRC 102.


5.4.5 Figures

Figure 5-14a – Tubular Daylighting Device Product Schematic – Vertical Elevation

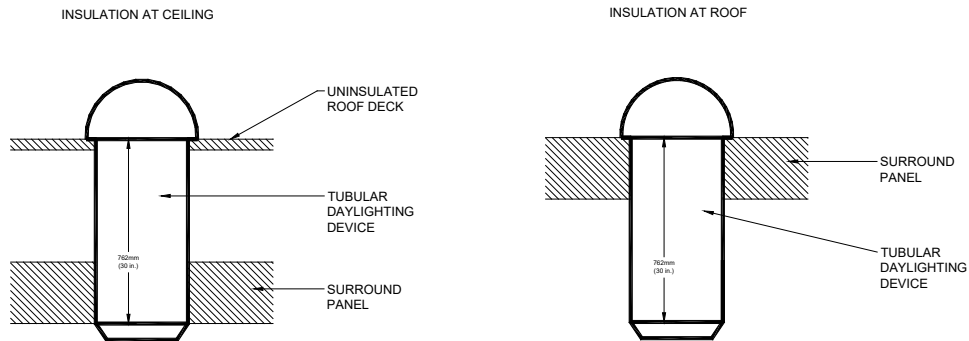

See Reference 12 for a more detailed drawing of the rough opening and diffuser plate attachment.

Figure 5-14b – Hybrid Tubular Daylighting Device Product Schematic – Vertical Elevation

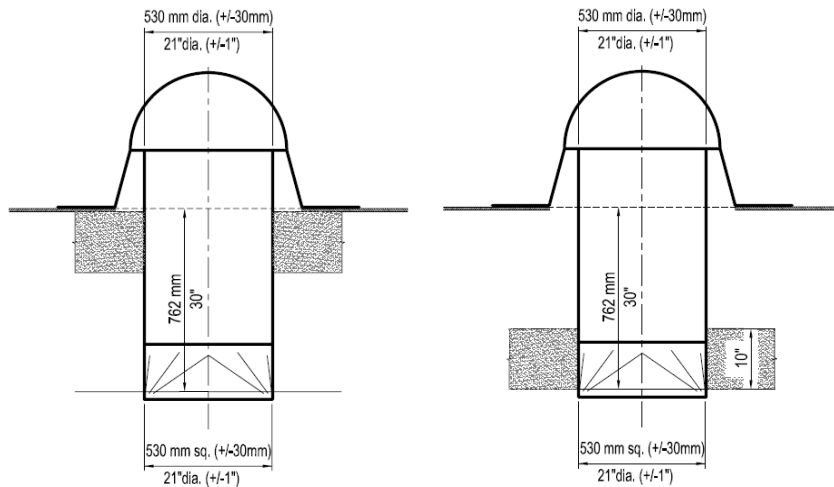

5.5 Vehicular Access (Garage) Doors

5.5.1 Scope

This section presents and references methods for determining specific garage door system heat transfer properties or quantities used in the determination of these properties. At this time, the scope of these properties is limited to total garage door system U-factor. For additional simulation parameters, see Reference 2.

5.5.2 Variations from Standard Product Lines

A given series of garage door systems defined by skin material, core material, and edge of garage door construction that differ only in:

- A. Size;
- B. Solid panel and panel cut-out configurations;
- C. The replacement of core or a panel area with a glazing system;
- D. Center-of-glazing characteristics and edge-of-glazing characteristics, such as glazing types, gap widths, glazing areas, use of dividers, use of spacers, glazing coatings, and/or gas fills;
- E. Panel changes where one component of the same physical shape has a thermal conductivity that differs by more than a factor of 10;
- F. Jamb track and/or hardware components, variations in panel interior/exterior finish, paint, varnish, or stain; and
- G. Variations in end stile design, intermediate stile design, and door bottom edge design.

5.5.3 Variations from Standard Individual Products

An individual product, in a product line, shall be those products that comply with the requirements per Section 5.5.2.

5.5.4 Variations from Standard Simulation and Test Conditions

- A. In accordance with validation testing for simulated garage door products, sectional garage doors shall have the U-factor determined using a specimen to fill a 2.13 m (7 ft) wide by 2.13 m (7 ft) tall opening (the aperture is smaller than the test specimen).
- B. For doors with glazing options, the glazing shall be per the manufacturer's design. If grids or dividers are normally used in garage door glazing, those grids and dividers shall be included for modeling purposes when glazing is included. The glazed

garage door option which meets the validation sample requirement shall be chosen for testing.

- C. Door opening framing and sill shall be included in simulation calculations. The framing (nominal 2 in x 4 in) and the sill (nominal 2 in x 6 in) shall consist of 38 mm (1 1/2 in) wood surrounding the perimeter of the door (See Figures 5-11 through 5-13).

5.5.5 Total Product Rating

The total garage door system U-factor shall be calculated as outlined below:

- A. Determine all of the following, as applicable:
 - i. Top rail (i.e., top edge of door) U-factor using the approved 2-D computational program, including the wood framing in the surround panel,
 - ii. Bottom rail (i.e., bottom edge of door) U-factor using the approved 2-D computational program, including the wood sill in the surround panel,
 - iii. End stile (i.e., side edge of door) U-factor using the approved 2-D computational program, including the wood framing in the surround panel,
 - iv. Meeting rail (i.e. section interface between door panels) U-factor using the approved 2-D computational program,
 - v. Door panel core U-factor using the approved 2-D computational program (this will only include portions of those top, intermediate, and bottom panels that are not glazed),
 - vi. Edge-of-glazing U-factor, including the glazing frame, using the approved 2-D computational program,
 - vii. Center-of-glazing U-factor per the total product height procedure as defined in Reference 2 using the approved center-of-glazing computational program, with input as needed from the approved center-of-glazing conductance test procedure given in Section 4.5.3, and
 - viii. The component areas in square feet, to the nearest 0.001 m² (0.010 ft²) of:
 - (a) Top rail area, which includes the greater of 63 mm (2.5 in) or 25 mm (1 in) into a homogeneous area of the door core, measured from the top edge of the wood opening framing,

- (b) Bottom rail area, which includes the greater of 63 mm (2.5 in) or 25 mm (1 in) into a homogeneous area of the door core, measured from the bottom edge of the wood opening sill,
 - (c) End stile area, which includes the greater of 63 mm (2.5 in) or 25 mm (1 in) into a homogeneous area of the door core, measured from the outside edge of the wood opening framing,
 - (d) Meeting rail area, which for each door panel includes the greater of 63 mm (2.5 in) or 25 mm (1 in) into a homogeneous area of the door core, measured from the interface of the door panels,
 - (e) Door panel core area,
 - (f) Edge-of-glazing area,
 - (g) Center-of-glazing area, and
 - (h) Projected total exterior door system area (including framing and sill areas);
- B. Perform the following calculations as shown in Equation 5-3:
- i. Multiply the top rail, bottom rail, end stile, meeting rail, door panel core, edge-of-glazing, and center-of-glazing area U-factors by their corresponding areas,
 - ii. Total these seven quantities, and
 - iii. Divide this total by the projected total exterior garage door system area to produce computed total garage door system product U-factors for all the door systems in the matrix of required U-factors.

$$U_t = [(U_{tr}A_{tr}) + (U_{br}A_{br}) + (U_{es}A_{es}) + (U_{mr}A_{mr}) + (U_{dpc}A_{dpc}) + (U_{eg}A_{eg}) + (U_{cg}A_{cg})]/A_{pt}$$

Equation 5-3

Where

U_t	=	Total door system U-factor
U_{tr}	=	Top rail U-factor
A_{tr}	=	Top rail area
U_{br}	=	Bottom rail U-factor
A_{br}	=	Bottom rail area
U_{es}	=	End stile U-factor
A_{es}	=	End stile area
U_{mr}	=	Meeting rail U-factor
A_{mr}	=	Meeting rail area
U_{dpc}	=	Door panel core U-factor
A_{dpc}	=	Door panel core area

U_{eg} = Edge-of glazing U-factor
 A_{eg} = Edge-of-glazing area
 U_{cg} = Center-of-glazing U-factor
 A_{cg} = Center-of-glazing area
 A_{pt} = Projected total door system area

5.5.6 Figures

Figure 5-15 – Garage Door U-factor Area Weighting, Sectional

Legend

- 1 Top Rail*
- 2 Bottom Rail*
- 3 Meeting Rail*
- 4 Door Panel Core
- 5 Edge-of-Glazing; 63 mm (2.5 in.)
around perimeter, including glazing
framing
- 6 Center-of-Glazing

*greater of 63 mm (2.5 in.) or 25 mm (1 in.) into a homogeneous area

Notes

- 1. Glazing is optional.
- 2. Number of glazing lites may vary.
- 3. Glazing locations may vary.


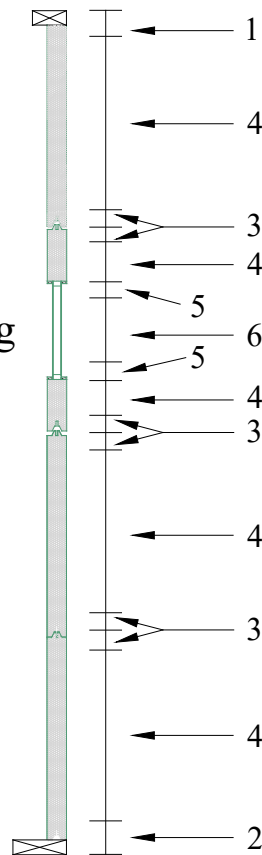


Figure 5-16 – Garage Door U-factor Area Weighting, Front Elevation View

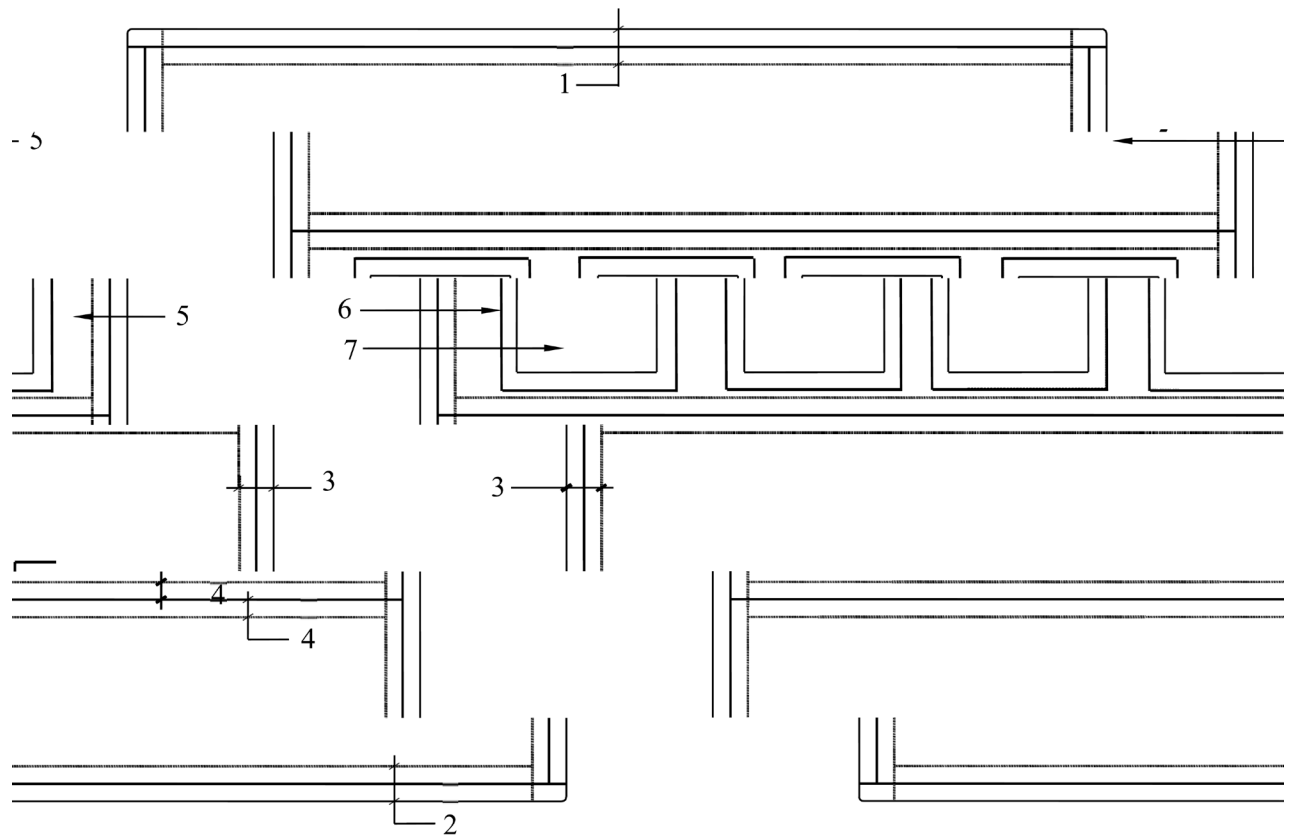


Legend

- 1 Top Rail*
- 2 Bottom Rail*
- 3 End Stile*
- 4 Meeting Rail*
- 5 Door Panel Core
- 6 Edge-c
- 7 Center

g Rail*
anel Core
if-Glazing; 63mm (2.5 in) around perimeter, including glazing
-of-Glazing

greater or 63mm (2.5 in) or 25mm (1 in) into a homogeneous area

Figure 5-17 – Garage Door Front Elevation View and Perimeter Details

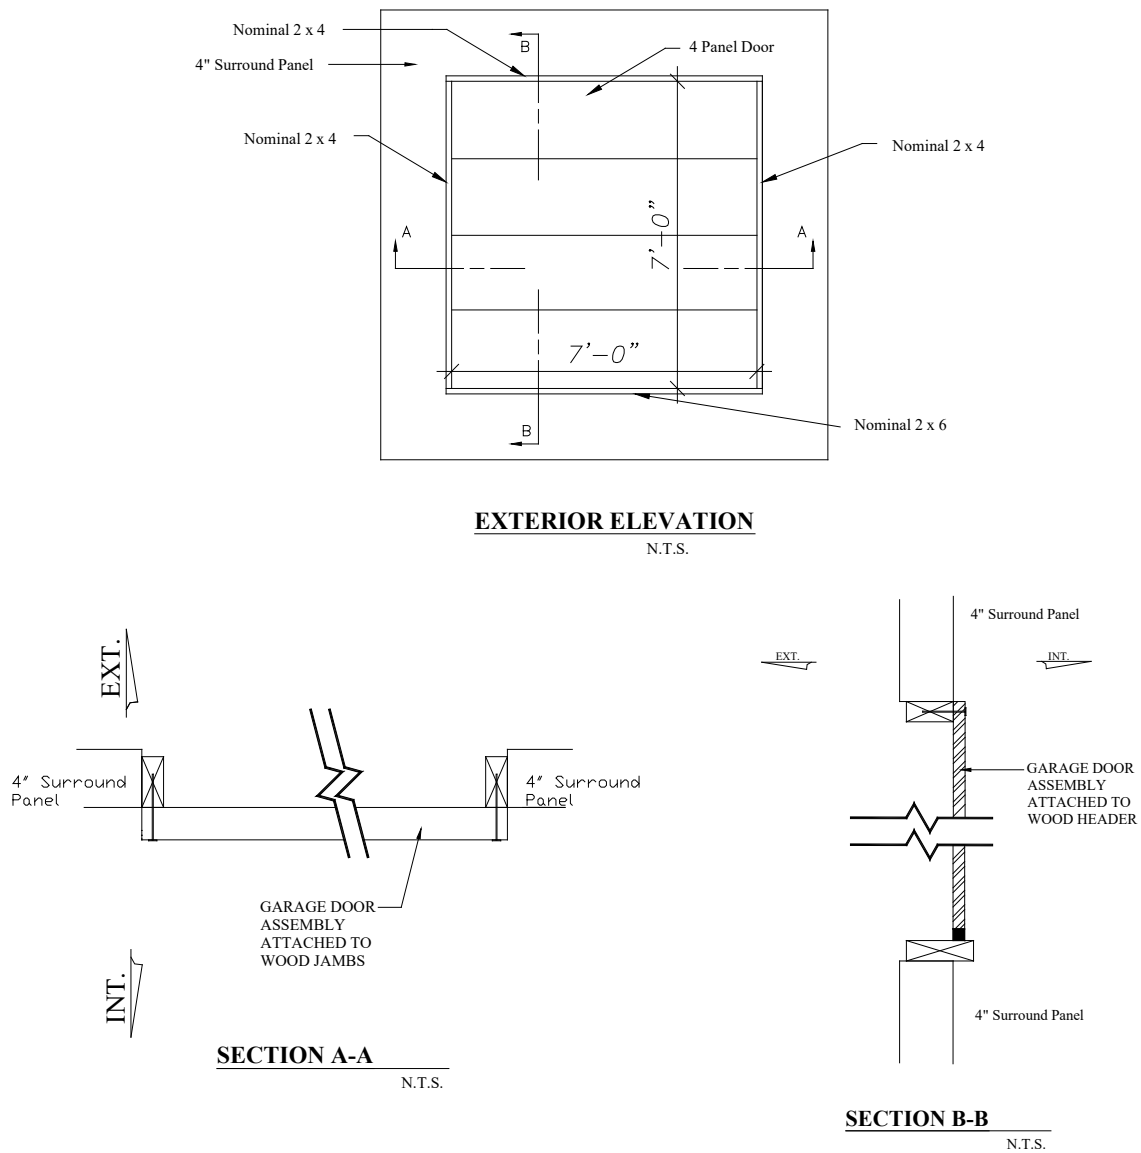

5.6 Non-Residential Products

5.6.1 Scope

Non-residential fenestration systems covered by this method include products that are designed to be field glazed or field assembled units comprised of specified framing and glazing components, including but not limited to:

5.6.1.1 Products and Systems Covered

Transparent and translucent wall systems where the glazing material is glass, plastic, or other light-transmitting panels (including opaque spandrel panels within the system), except those products where no testing or calculation procedure exists

- A. Glazed wall support and framing systems;
- B. Products of any size and design;
- C. Products with single or multiple glazing layers;
- D. Products with spacer systems between glazings;
- E. Horizontal, vertical and sloped systems;
- F. Products that, by design, may have multiple framing components and/or glazing combinations;
- G. Fenestration systems using unitized construction, where a system is field assembled from factory assembled sub-units; and
- H. Dynamic glazing products.

5.6.2 Variations from Standard Product Lines

If a glazed wall system meets the definition of a curtain wall system, it shall be rated as a curtain wall system, regardless of application. If a glazed wall system meets the definition of a window wall system, it shall be rated as a window wall system, regardless of application.

5.6.3 Variations from Standard Individual Products

None

5.6.4 Variations from Standard Simulation and Test Conditions

5.6.4.1 Rating Configuration for Glazed Wall and Sloped Glazing Systems

These systems are rated using two lites with a single vertical mullion.

- A. Curtain Walls shall be simulated and tested with intermediate verticals as jambs and intermediate horizontals as head/sill frame members. Area weight intermediate members based on centerline dimensions.
- B. Window walls shall be simulated and tested with intermediate verticals as jambs and standard head and sill members. Area weight intermediate members based on centerline dimensions.
- C. Sloped glazing may also be rated based on the centerline dimensions if utilized like a curtain or window wall, except for solariums and sunrooms.
- D. Sloped glazing of solariums and sunrooms shall be simulated and tested with standard jamb, head, and sill members (see Section 5.6.4.3).
- E. Other sloped glazing, as identified under the "Architectural Skylight Systems" definition, shall also be rated as sloped glazing products based on centerline dimensions. These products shall be simulated and tested with purlins as head and sill and rafters as jambs and vertical mullion.
- F. Spandrel panel systems are utilized within glazed walls and therefore shall be simulated with the same modeling rules as indicated in this section for the appropriate product type.

5.6.4.2 Unspecified Product Sample Validation Criteria

If the product to be used for validation purposes is not specified, then the individual product used for validation purposes shall be simulated and tested using the following criteria: The test specimen shall be constructed in such a manner as to be identical to the individual product simulated and have outside dimensions measuring 2000 mm x 2000 mm (79 in x 79 in), having one vertical mullion and two glazed lites. The glazing system configuration for the validation testing shall be nominal 25 mm (1 in) outside dimension insulating glass utilizing two lites of 6 mm (1/4 in)

clear (uncoated glass), a typical dual-sealed aluminum spacer system, and air-filled. There shall be no insulation of any type applied to the test specimen during validation testing. Validation will be achieved per Section 4.7.1

This section is to be used only in those instances where the representative sample for validation purposes has not been prescribed by a specifying authority, such as an architect, project manager, engineering firm, building owner, etc.

For simulating and testing of all other fenestration operator types other than glazed wall systems, sloped glazing, and solarium/sunroom systems model sizes shall be consistent with the sizes listed in Table 4-3 of this standard.

5.6.4.3 Determining the Thermal Transmittance for Solarium/Sunroom Systems

Note: This procedure is to be used when the solarium is glazed on-site. If manufactured window or door systems are used to create the glazed walls in a solarium, the thermal transmittance shall be determined in accordance with Section 4 of this standard.

- A. The thermal transmittance of solarium/sunroom systems shall be determined in accordance with Section 4.1 of this standard;
- B. For simulating and testing site-built vertical glazed wall sections of solarium/sunroom systems, each product line shall have one baseline product validated in accordance with Section 4.1.1 and 4.3.1, with the following exception--the individual product used for validation purposes shall be simulated and tested using the following criteria: the test specimen shall be constructed in such a manner as to be identical to the individual product simulated and have outside dimensions measuring 2000 mm x 2000 mm (79 in x 79 in), having one vertical mullion and two glazed lites; the glazing system configuration for the validation testing shall be nominal 25 mm (1 in) outside dimension insulating glass utilizing two lites of 3 mm (1/8 in) clear (uncoated glass), a typical dual-sealed aluminum spacer system, and air-filled; and there shall be no insulation of any type applied to the test specimen during validation testing. Validation will be achieved per Section 4.1.1;

- C. Sloped glazing systems shall be rated in accordance with Section 4.1 utilizing sample construction as described in Section 5.6.4.3.B; and
- D. For simulating and testing all other fenestration operator types other than glazed wall systems and sloped glazing systems, model sizes shall be consistent with the sizes listed in Table 4-3 of this standard with glazing in accordance with Section 5.6.4.3.B.

5.6.5 Calculation of Total Product Rating

Calculation of U-factor of an opaque spandrel panel system cannot be conducted using Berkeley Lab WINDOW. Opaque spandrel panel systems require a 254mm (10 in.) edge-of-glass (panel) U-factor surface tag. Therefore, a specialized spreadsheet shall be used to conduct the proper product area-weighting using equation 5-1 whereas the center-of-glazing is the spandrel system (glass/air/insulated panel) for the variables U_c (derived from THERM) and A_c

5.6.6 Figures

None

5.7 Dynamic Attachment for Swinging Door Products (DASD)

Rating procedures for full and half lite glazed swinging doors shall be used with the dynamic attachment in the “fully open” and “fully closed” positions.

5.7.1 Scope

This section presents additional details specific to DASD. This section presents and references methods for determining specific dynamic attachments for swinging doors U-factor rating.

5.7.2 Methodology

Methodology for rating full and half lite swinging doors can be found in Section 5.2. DASD products will be rated using Reference Swinging Doors (see Table 5-2 and Figures 5-18 and 5-19).

The dynamic attachment for swinging door shall be simulated with the attachment in the “fully open” position.

The DASD shall be tested as a whole product system (attachment and reference door) in the “fully closed” position. Center-of-glazing tests are not acceptable for this purpose.

Individual product ratings shall be determined for each of the four configurations.

5.7.3 Approved Computational Program

The DASD product U-factor shall be determined using approved glazed swinging door simulation. The DASD shall be modeled on the following reference swinging doors.

Table 5-2 – Reference Swinging Doors

3068; Steel skin; wood edge; EPS core door ½” IG Full and Half Lite
See Figure 5-18
3068; Fiberglass skin; wood edge; urethane core door ½” IG Full and Half Lite
See Figure 5-19

Reference Swinging Door Glazing Detail

The glazing system shall consist of two panes of 3 mm (1/8 in) clear glass with a 1/4 in air gap separated by an aluminum spacer system. For simulation purposes, the 3 mm (1/8 in) clear glass shall be the generic 3mm clear glass file (ID#102) from the approved NFRC spectral data files with the International Glazing Database (IGDB).

5.7.4 Figures

Figure 5-18 – Reference Swinging Door Details


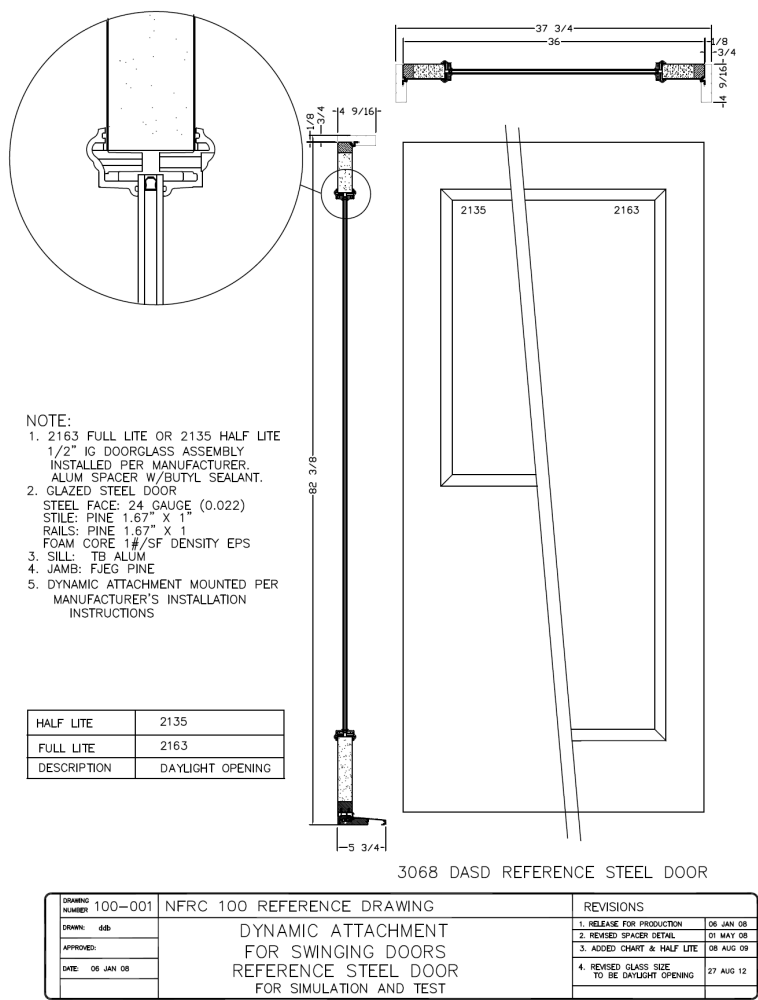


Figure 5-19 – Reference Swinging Door Details

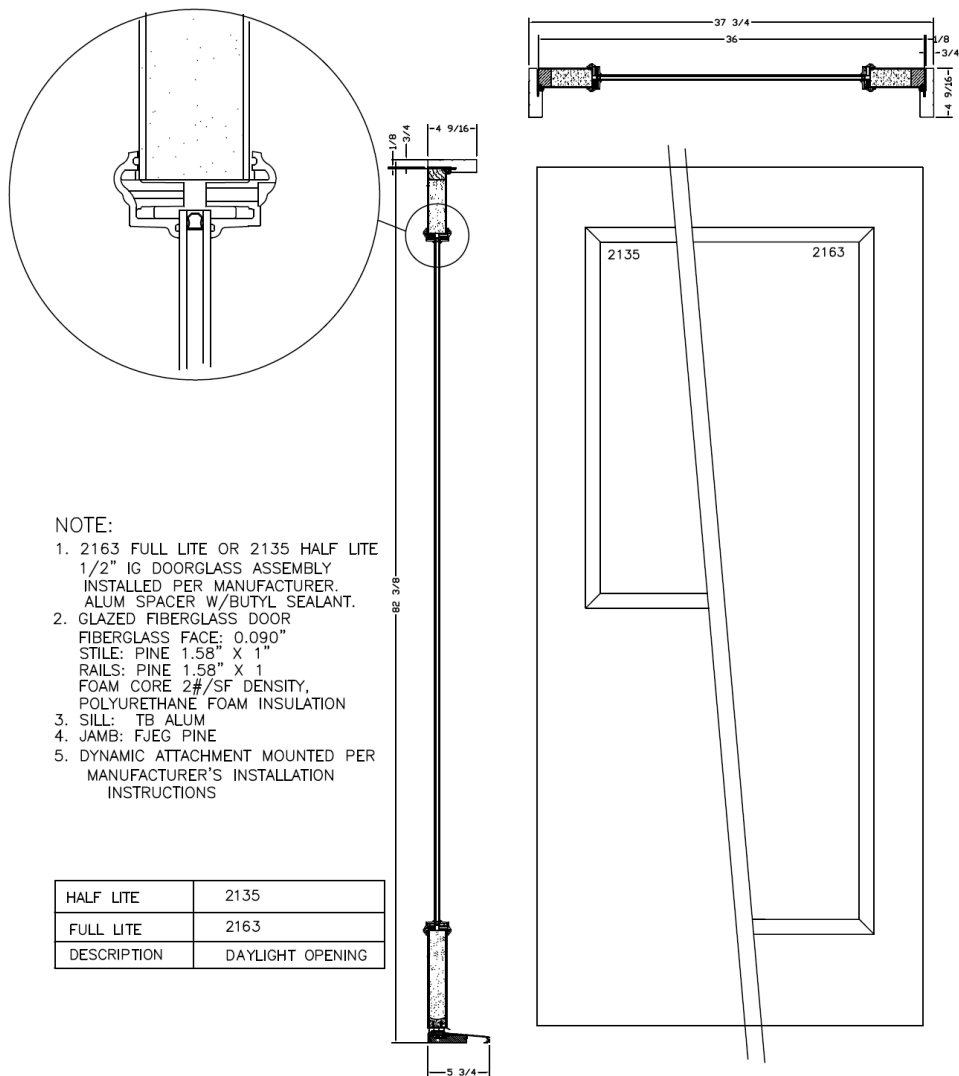

3068 DASD REFERENCE FIBERGLASS DOOR

DRAWING NUMBER	100-002	NFRC 100 REFERENCE DRAWING	REVISIONS
DRAWN:	ddb	DYNAMIC ATTACHMENT FOR SWINGING DOORS REFERENCE FIBERGLASS DOOR FOR SIMULATION AND TEST	1. RELEASE FOR PRODUCTION 06 JAN 08
APPROVED:			2. REVISED SPACER DETAIL 01 MAY 08
DATE:	06 JAN 08		3. ADDED CHART & HALF LITE 08 AUG 09
			4. REVISED GLASS SIZE TO BE DAYLIGHT OPENING 27 AUG 12

5.8 Rolling Doors

5.8.1 Scope

This section presents and references methods for determining specific rolling door system heat transfer properties or quantities used in the determination of these properties. At this time, the scope of these properties is limited to total rolling door system U-factor. For additional simulation parameters see Reference 2.

5.8.2 Variations from Standard Product Lines

A given series of rolling door systems defined by skin material, core material, and edge of rolling door construction that differ only in:

- A. Size,
- B. Slat changes where one component of the same physical shape has a thermal conductivity that differs by more than a factor of 10,
- C. Jamb guide components,
- D. Variations in slat ends and guide configurations,
- E. Variations in slat interior/exterior finish that changes the surface emittance by more than 0.10, and
- F. Variations in top slat and bottom slat/bottom bar designs.

5.8.3 Variations from Standard Individual Products

An individual product, in a product line, shall be those products that comply with the requirements per Section 5.8.2.

5.8.4 Variations from Standard Simulation and Test Conditions

- A. In accordance with validation testing for simulated rolling door products, rolling doors shall have the U-factor determined using a specimen to fill a 2.13 m (7 ft) wide by 2.13 m (7 ft) tall opening (the aperture is smaller than the test specimen);
- B. Slat height shall be per the manufacturer's drawing (the bottom slat, the top slat, and the intermediate slats shall be modeled per manufacturer drawings);
- C. Slat ends and guide configurations shall be per the manufacturer's drawing;
- D. Rolling door simulations shall not include components and hardware above the top of the opening, e.g. hood, barrel, operator, etc.; and

- E. Door opening framing and sill shall be included in simulation calculations. The framing (nominal 2 in x 4 in) and the sill (nominal 2 in x 6 in) shall consist of 38 mm (1.5 in) thick wood surrounding the perimeter of the door (See Figures 5-15 through 5-17).

5.8.5 Total Product Rating

The total rolling door system U-factor shall be calculated as outlined below:

- A. Determine all of the following, as applicable:
 - i. Top rail (i.e., top edge of door) U-factor using the approved 2-D computational program, including the wood framing in the surround panel,
 - ii. Bottom rail (i.e., bottom edge of door) U-factor using the approved 2-D computational program, including the wood sill in the surround panel,
 - iii. End stile (i.e., side edge of door) U-factor using the approved 2-D computational program, including the wood framing in the surround panel,
 - iv. Door core U-factor using the approved 2-D computational program, and
 - v. The component areas in square feet, to the nearest 0.001 m² (0.010 ft²) of:
 - (a) Top rail area, which includes the greater of 63 mm (2.5 in) or 25 mm (1 in) into a homogeneous area of the door core, measured from the top edge of the wood opening framing,
 - (b) Bottom rail area, which includes the greater of 63 mm (2.5 in) or 25 mm (1 in) into a homogeneous area of the door core, measured from the bottom edge of the wood opening sill,
 - (c) End stile area, which includes the greater of 63 mm (2.5 in) or 25 mm (1 inch) into a homogeneous area of the door core, measured from the outside edge of the wood opening framing,
 - (d) Door core area, using three slats as the basis for computation, and
 - (e) Projected total exterior door system area (including framing and sill);

- B. Perform the following calculations as shown in Equation 5-4:
- i. Multiply the top rail, bottom rail, end stile, and door core U-factors by their corresponding areas,
 - ii. Total these four quantities, and
 - iii. Divide this total by the projected total exterior rolling door system area to produce computed total rolling door system product U-factors for all the door systems in the matrix of required U-factors.

$$U_t = [(U_{tr}A_{tr}) + (U_{br}A_{br}) + (U_{es}A_{es}) + (U_{dc}A_{dc})]/A_{pt}$$

Equation 5-4

Where

U_t	=	Total door system U-factor
U_{tr}	=	Top rail U-factor
A_{tr}	=	Top rail area
U_{br}	=	Bottom rail U-factor
A_{br}	=	Bottom rail area
U_{es}	=	End stile U-factor
A_{es}	=	End stile area
U_{dc}	=	Door core U-factor
A_{dc}	=	Door core area
A_{pt}	=	Projected total door system area

5.8.6 Figures

Figure 5-20 – Rolling Door U-factor Area Weighting - Sectional View

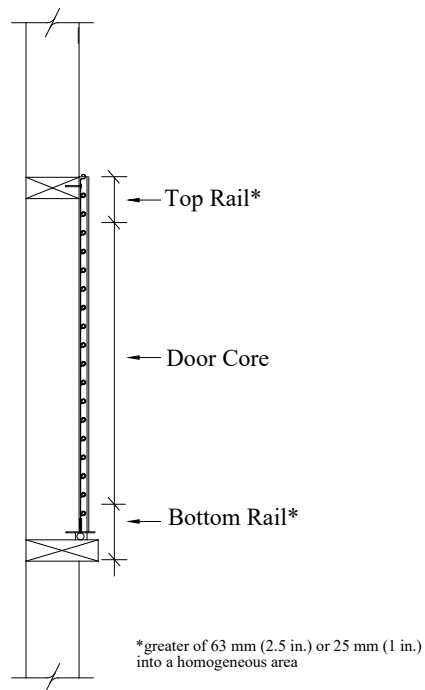


Figure 5-21 – Rolling Door U-factor Area Weighting – Front Elevation View



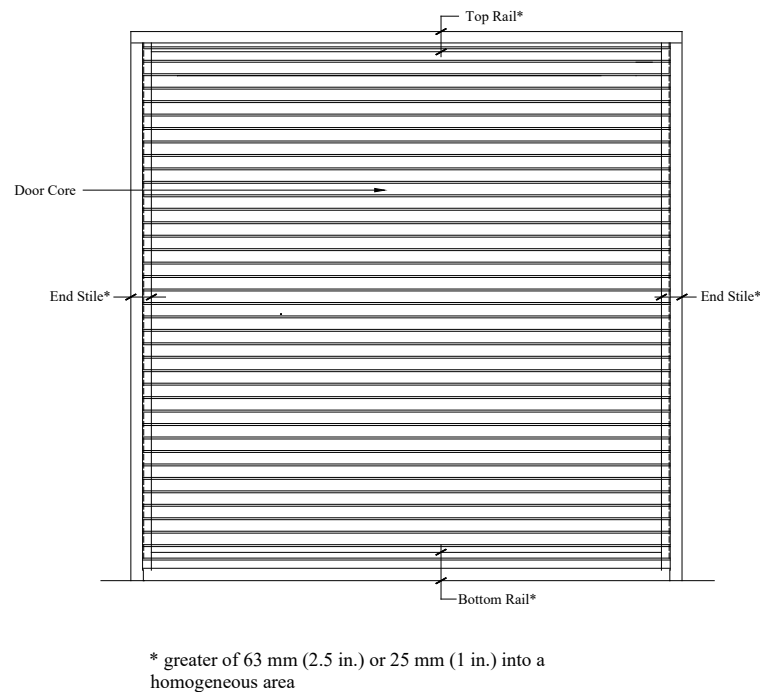


Figure 5-22 – Rolling Door Front Elevation View and Perimeter Details

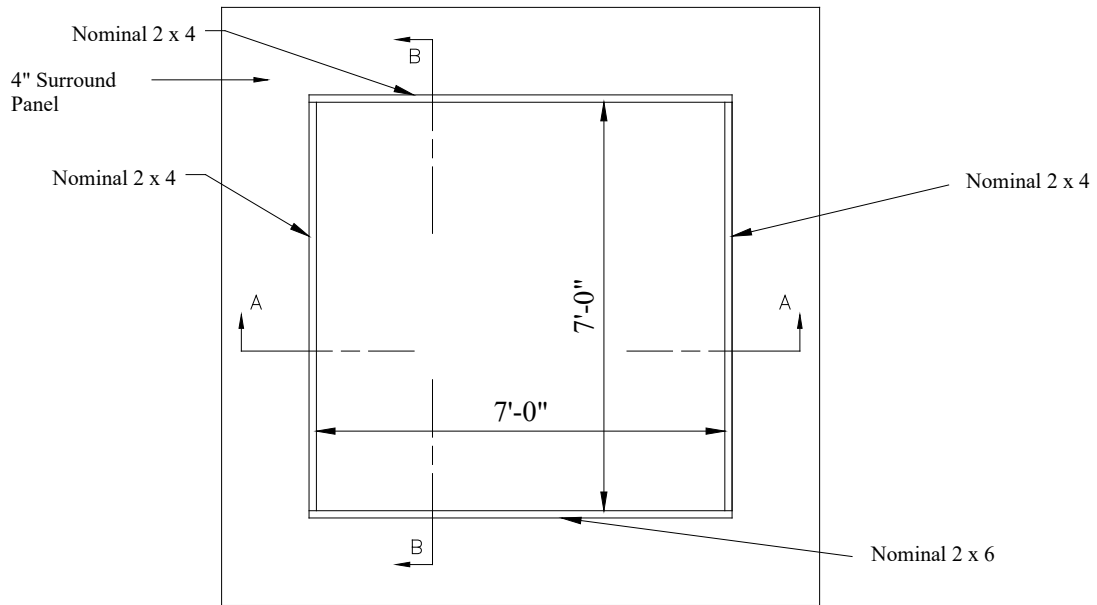

EXTERIOR ELEVATION

Door not shown N.T.S.

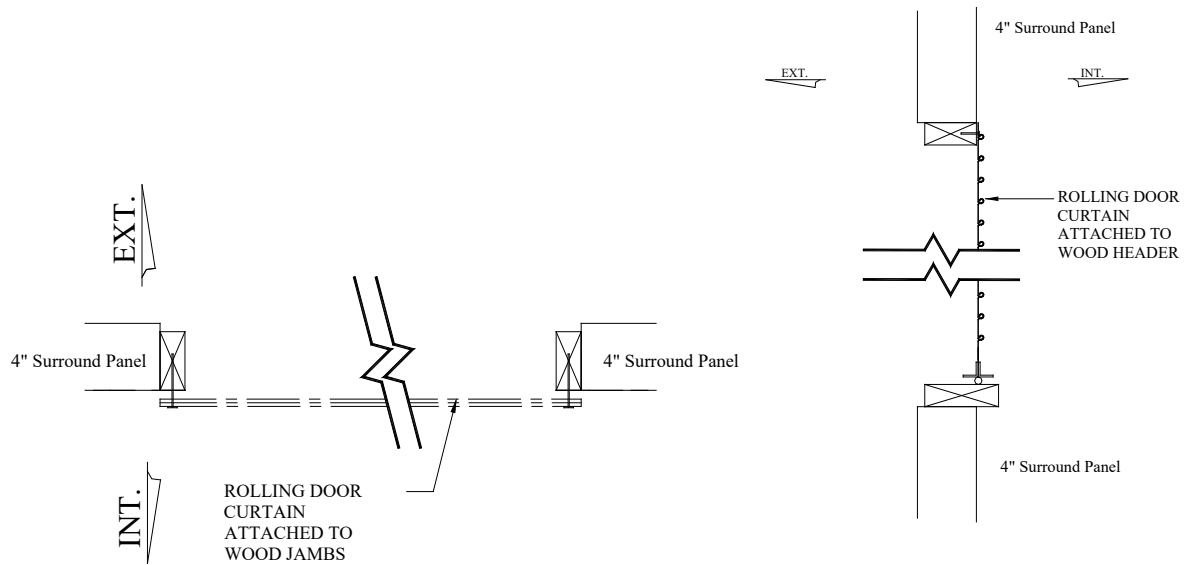

SECTION A-A

N.T.S.

SECTION B-B

N.T.S.

5.9 THIS SECTION INTENTIONALLY LEFT BLANK

5.10 Applied Films

Note: Applied films factory-applied to glazing prior to fenestration product fabrication and installation are already covered as glazing options by ANSI/NFRC 100 and shall not be rated according to the procedure of Section 5.10 below.

5.10.1 Scope

This section presents additional details specific to applied films. This section presents and references methods for determining specific applied films U-factor rating.

5.10.2 Variations from Standard Product Lines

None

5.10.3 Variations from Standard Individual Products

None

5.10.4 Variations from Standard Simulation and Test Conditions

5.10.4.1 Approved Center-of-Glazing Computational Program

Approved center-of-glazing software shall be used to determine U-factor. Applied films shall be from the approved NFRC spectral data files with the International Glazing Database (IGDB). Glazing/applied film assembly shall be constructed in accordance with NFRC 304 procedure.

The following reference glazing systems shall be simulated with and without the film installed:

- A. Single 3 mm (1/8 in) Clear;
- B. Single 6 mm (1/4 in) Clear;
- C. Single 6 mm (1/4 in) Grey;
- D. Double 3 mm (1/8 in) Clear/3 mm (1/8 in) Clear: 7 mm (1/4 in) air gap;
- E. Double 6mm (1/4 in) Clear/ 6 mm (1/4 in) Clear: 12.7 mm (1/2 in) air gap; and
- F. Double 6 mm (1/4 in) Grey/ 6mm (1/4 in) Clear: 12.7 mm (1/2 in) air gap.

The position (surface number) of the film when installed on the glazing system shall be documented (i.e., #1 to #4).

This will yield the matrix in Table 5-8 for each applied film and applied film position.

5.10.5 Calculation of Total Product Rating

The reference fenestration product with applied film U-factor shall be calculated as outlined below.

5.10.5.1 Reference Fenestration Products

Calculate the total fenestration product U-factor for each reference fenestration product with the corresponding applied film according to Section 5.10.5.2. U-factors for reference products are pre-calculated based on the illustrations in Figures 5-23 and 5-24. This will result in the matrix in Table 5-9 for each film product.

Figure 5-23 – Residential Fixed Window Reference Product



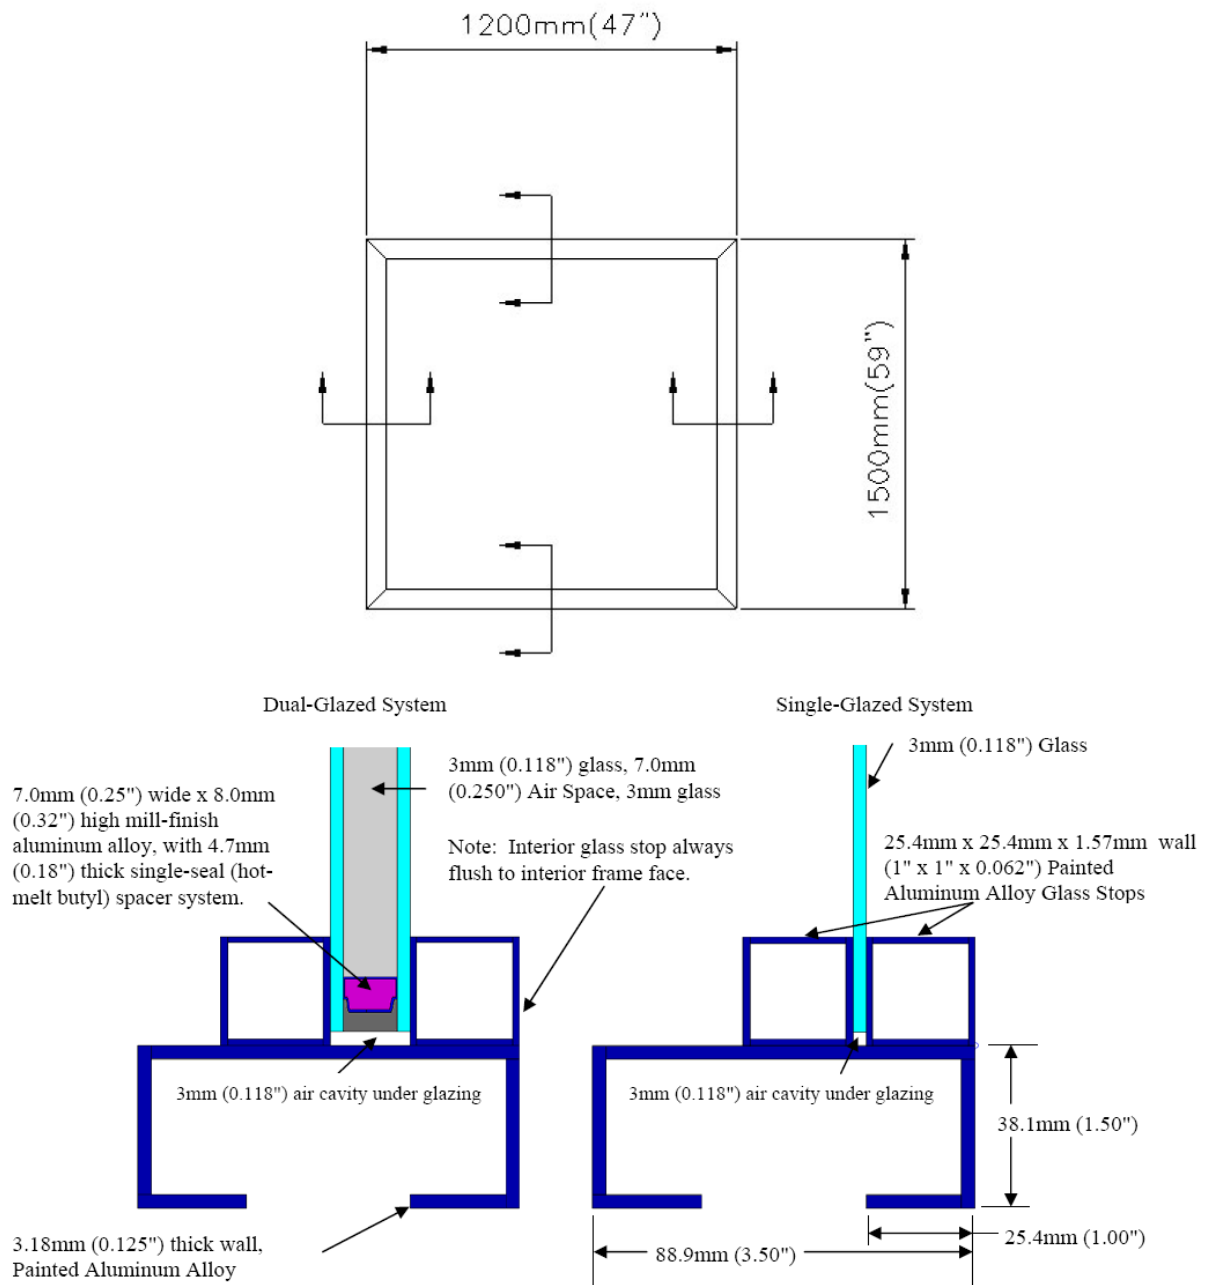


Figure 5-24 – Non-Residential Window-Wall Reference Product

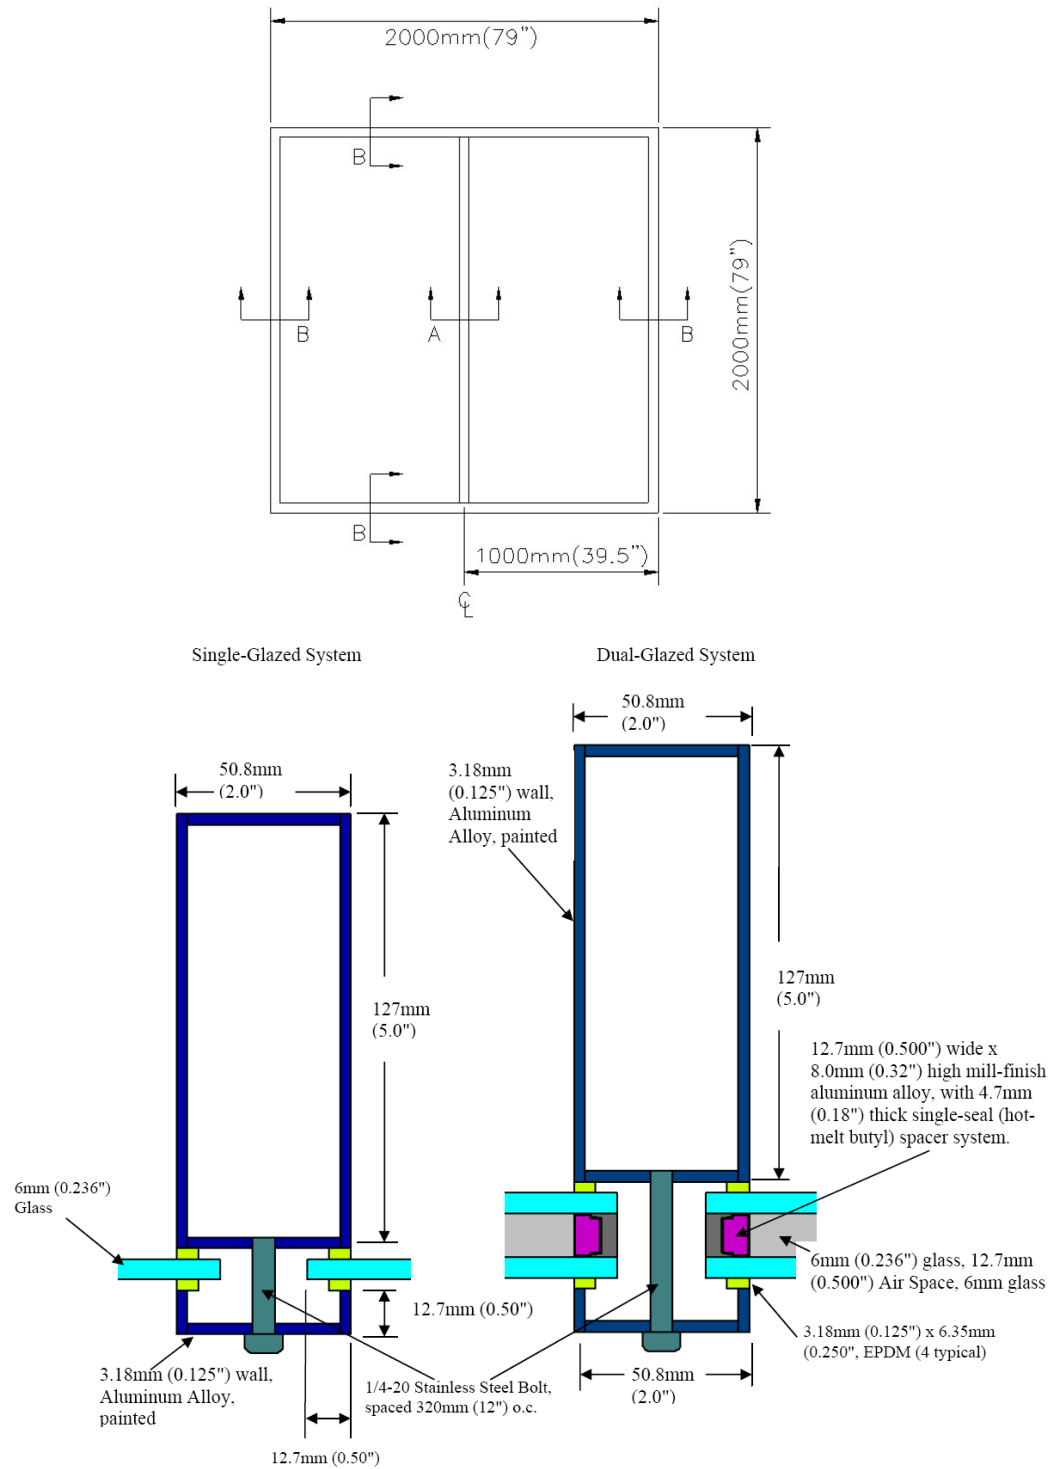

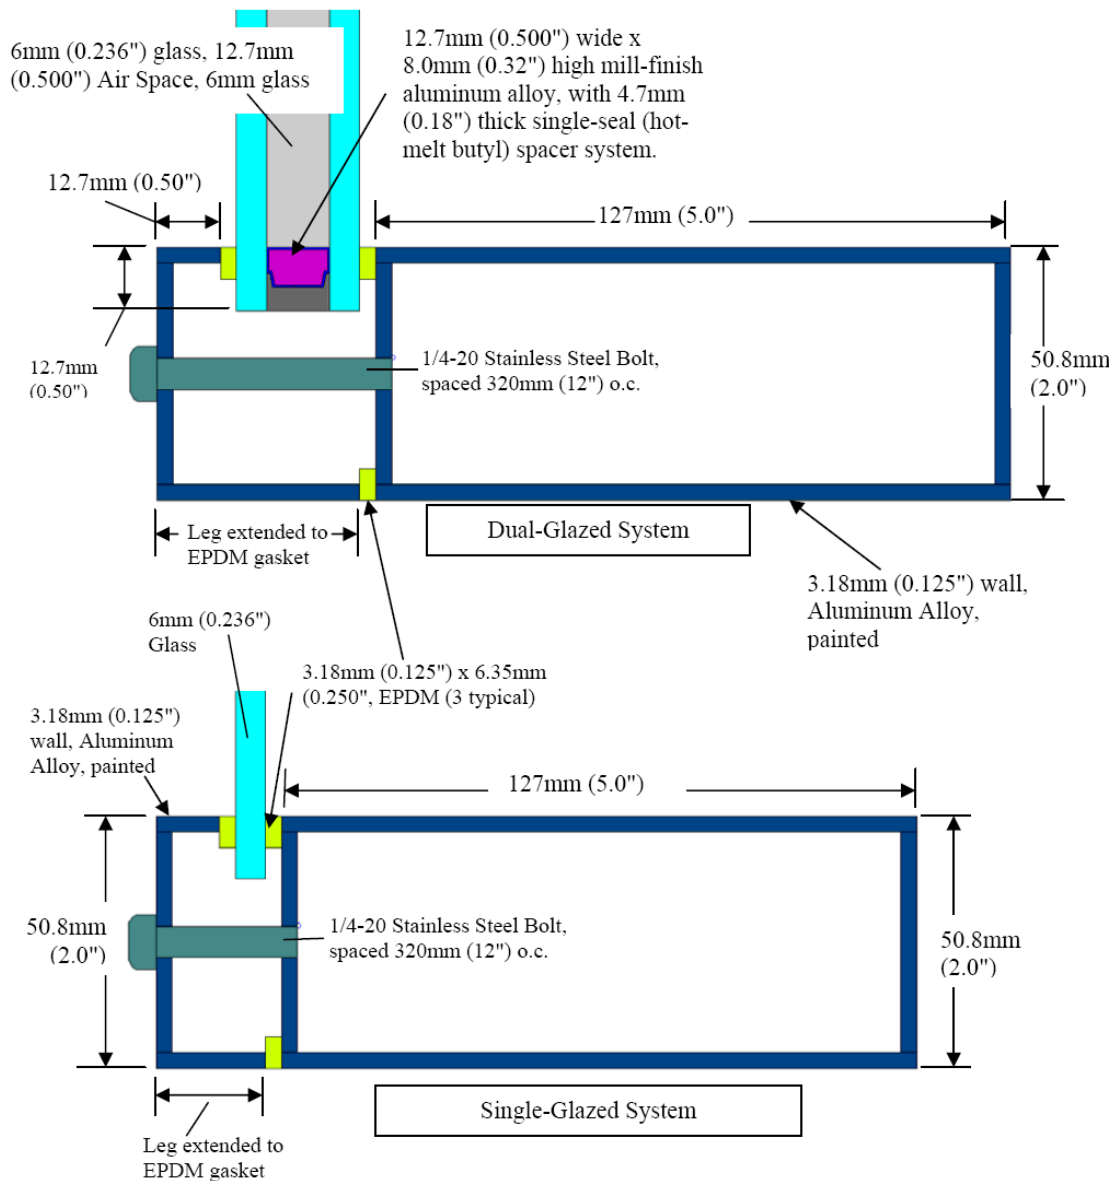

5.10.5.2 Total Fenestration Product U-factor

Calculate the total fenestration product U-factor for each reference fenestration product and corresponding reference product with applied film using the following equation:

$$U_t = [\Sigma(U_f A_f) + \Sigma(U_e A_e) + \Sigma(U_c A_c)] / A_{pf} \quad \text{Equation 5-5}$$

Where:

- U_t = Total product U-factor, W/m^2K , (Btu/h·ft²·°F)
- A_{pf} = Projected fenestration product area, m² (ft²)
- U_f = Frame U-factor, W/m^2K , (Btu/h·ft²·°F)
- A_f = Frame area, m² (ft²)
- U_e = Edge-of-glazing U-factor, W/m^2K , (Btu/h·ft²·°F)
- A_e = Edge-of-glazing area, m² (ft²)
- U_c = Center-of-glazing U-factor, W/m^2K , (Btu/h·ft²·°F)
- A_c = Center-of-glazing area in ft² (m²)

To three significant figures

Table 5-8 – Center-of-Glazing Values U_c

Reference Glazing System	Without Film	With Film	
	U_c Btu/h·ft ² ·°F	Film Position	U_c^* Btu/h·ft ² ·°F
3 mm (1/8 in) clear	1.04	Interior	
6 mm (1/4 in) clear	1.02	Interior	
6 mm (1/4 in) grey	1.02	Interior	
3 mm (1/8 in) clear 3 mm (1/8 in) clear 7mm (1/4 in) gap	0.55	Interior	
6 mm (1/4 in) clear 6 mm (1/4 in) clear 12.7mm (1/2 in) gap	0.47	Interior	
6mm (1/4 in) grey 6 mm (1/4 in) clear 12.7mm (1/2 in) gap	0.47	Interior	

* U_c 'with Film' shall be calculated using reference glazing with film to be rated.

Table 5-9 – Values of U-factor for Reference and Applied Films

Reference Product			U-factor Btu/h·ft ² ·°F	
Operator Type	Reference Frame	Reference Glazing	no film	with film*
Residential Fixed	Aluminum	3mm (1/8 in) clear	1.081	
Non-Residential Window-wall	Aluminum	6mm (1/4 in) clear	1.021	
		6mm (1/4 in) grey	1.021	
Residential Fixed	Aluminum	3mm (1/8 in) clear 3mm (1/8 in) clear 7mm (9/32 in) gap	0.700	
Non-Residential Window-wall	Aluminum	6mm (1/4 in) clear 6mm (1/4 in) clear 12.7mm (1/2 in) gap	0.588	
		6mm (1/4 in) grey 6mm (1/4 in) clear 12.7mm (1/2 in) gap	0.588	

* 'with film' shall be calculated using reference glazing with film to be rated.

5.10.6 Testing

If a reference product with applied film cannot be simulated in accordance with Section 5.10.5, the center-of-glazing test procedure in Section 5.10.6.1 shall be used to determine the U-factor of the applied film glazing system.

5.10.6.1 Center-of-Glazing Component Test Procedure

The center-of-glazing U-factor (U_c) for corresponding reference product glazing system with applied film shall be tested in accordance with Section 4.6.2.1.

5.10.6.2 Total Fenestration Product Test Procedure

Using center-of-glazing U-factor (U_c) determined in accordance with Section 5.10.6.1 with applicable reference product framing system shall be simulated to calculate total fenestration product U-factor.

5.11 Trendline Approach

5.11.1 Scope

This section covers methods for determining fenestration product U-factor (thermal transmittance) for fenestration products using a trendline calculation approach.

5.11.2 Products and Systems Covered

Product lines that are comprised of only the following product types: a fully glazed stile and rail hinged doors, lift and slide doors, folding doors, and products listed in Table 4-3 except for the following:

- A. Garage (Vehicular Access)/Rolling Door;
- B. Greenhouse/Garden;
- C. Non-full lite Door Sidelite;
- D. Non-full lite Side-Hinged Exterior Door;
- E. Non-full lite Door Transom; and
- F. Tubular Daylighting Device

5.11.3 Variations from Standard Product Lines

None

5.11.4 Variations from Standard Simulation and Test Conditions

5.11.4.1 Trendlines

Grouping criteria referenced in Section 4.2.4 shall be applied prior to calculating the whole product U-factor using a trendline calculation. After applying Section 4.2.4 grouping of products, separate trendlines are generated based on a product's characteristics.

Each trendline represents a specific categorization of individual product options for which there is a linear relationship between the center-of-glass U-factor (U_{cog}) and the total product U-factor (U_{tot}). The linear relationship is used to generate the U_{tot} from any individual product option's U_{cog} that falls within the categorized specifications.

The accuracy of the trendline relationship is affected by certain characteristics of the individual product options and is independent of other characteristics. For example, a data group containing both argon-filled and krypton-filled glazings will produce an accurate trendline; whereas,

introducing different gaps widths will greatly reduce the accuracy.

Research has produced a list of known characteristics that affect trendline accuracy. By categorizing individual product options per these factors, the result produces accurate trendlines for any product options that fall within that category.

5.11.4.1.1 Categorizing Product Options for a Trendline

Available individual product options shall be separated into product groupings (categories) per a combination of the characteristics listed below. A category need only be created for those options available for a given product line.

A trendline per section 5.11.4.1.2 will be created for each category of the following characteristics:

- A. IGU characteristics:
- B. glass types – monolithic or laminate
- C. cavity width size;
- D. spacer system;
- E. number of glazing layers;
- F. Interior surface low-e;
- G. grids or true divided lites; and
- H. dynamic glazing products
- I. Frame characteristics
- J. reinforcement material and locations;
- K. frame cavity fill material and locations;
- L. sightline

NOTE: Refer to NFRC LEAFF Simulation Manual to develop trendlines.

5.11.4.1.2 Establishing Trendline Endpoints

The categorization of a trendline per section 5.11.4.1.1 will set the glazing options. The following explains the process to set the three points used for a trendline. A category with less than three glazing options shall not be permitted to use the trendline methodology.

- A. Each trendline shall be established with a minimum of three (3) points: the two endpoints and one midpoint.
- B. Glazing (i.e., center-of-glass) options for the endpoints shall be the best and worst performing (U_{c-min} and U_{c-max} , respectively) options in the available category options.
- C. Glazing selection for each trendline COG midpoint (U_{c-mid}) shall be the closest COG of the average of the U_{c-min} and U_{c-max} . For trendlines where there are only three glazing options, the three options will be the U_{c-min} , U_{c-mid} , and U_{c-max} .
- D. The determined U_{c-min} , U_{c-mid} , and U_{c-max} shall be used to develop trendlines per Section 5.11.4.1.3.

5.11.4.1.3 Development of a Trendline

For each category established in 5.11.4.1.1, a trendline shall be created from the three points selected in 5.11.4.1.2.

- A. Each of the point glazing configurations shall be simulated with the category frame and spacer options, per NFRC RCBC Simulation Manual.
- B. The resulting whole product (U_{tot}) and COG (U_c) U-factors of each trendline point shall be plotted as a line graph, as specified below, using NFRC's Trendline Excel file.
- C. The values of U_c are plotted against the horizontal (X) axis.
- D. The values of U_{tot} are plotted against the vertical (Y) axis.
- E. The linear equation coefficients, "m" and "b", for this category, as well as the R^2 value, shall be computed from the modeling results.
- F. The m and b coefficients define the trendline and are used to calculate U_{tot} from U_c .

- G. The R^2 coefficient of determination is a measure of the linearity of the trendline points. Its value shall be greater than 0.990.
- H. If the trendline's R^2 evaluation does not meet linearity standards, the results shall require the re-simulation of the existing points or the re-categorization of the trendline per 5.11.4.1.1.

5.11.5 Total Fenestration Product U-factor Rating

- A. Develop a matrix of all individual product options according to the trendline category.
- B. To determine the total fenestration product U-factors for all entries in the trendline matrix, use the values from the slope intercept formula $y=mx+b$.
 - i. The “m” is the slope
 - ii. The “b” is the intercept
 - iii. The “x” is the individual product option's center-of-glass U-factor_(cog).
 - iv. The “y” is the whole product total U-factor_(tot).
- C. Apply the slope intercept formula representing the “x” for each corresponding individual product option's center-of-glass U-factor_(cog) listed in the matrix. The resulting “y” is the individual product's total U-factor_(tot) rating.

5.11.6 Validation

The baseline product option selected per Section 4.2.6 criteria shall be modeled and shall be an option in the trendline.

5.11.7 Adding Individual Product Options to Existing Trendlines

- A. Addition of new individual product options where the U_{cog} falls inside an existing trendline's endpoint range, shall be permitted to use that existing trendline.
- B. Addition of new individual product options where the U_{cog} falls outside an existing trendline's endpoint range, shall not use that existing trendline and shall create a new trendline per section 5.11.4.1 for new individual product options.

5.12 Commercial Trendline Approach

5.12.1 Scope

This section covers methods for determining commercial fenestration product U-factor (thermal transmittance) using the Commercial Trendline Approach (CTA).

5.12.2 Products and Systems Covered

- A. All products listed in Table 4-3 except
 1. Garage (Vehicular Access)/Rolling Door;
 2. Greenhouse/Garden;
 3. Tubular daylighting devices
 4. Tropical awning
 5. Non-full lite Door Sidelite;
 6. Non-full lite Side-Hinged Exterior Door, and;
 7. Non-full lite Door Transom
- B. Combination products (refer to NFRC 715);
- C. Composite products (refer to NFRC 715)

5.12.3 Variations from Standard Product Lines

None (see Section 4.2.1)

5.12.4 Commercial Trendlines

Grouping criteria referenced in Section 4.2.4 shall be applied prior to calculating the total product U-factor using the CTA. After applying Section 4.2.4 grouping of products, a minimum of two trendlines are generated based on a product's characteristics.

These trendlines represent a specific product grouping of individual product options for which there is a linear relationship between the glazing system (center-of-glass U-factor (U_{cog}) and the total product U-factor (U_{tot}). The linear relationship is used to generate the U_{tot} from any individual product option's U_{cog} and spacer system that falls within the product grouping specifications for the trendline.

5.12.5 Standard Simulation

All simulations shall be based on computer simulations that comply with Section 4.3.1 and use NFRC approved software.

The CTA uses aspects of the Trendline Approach (LEAFF Methodology) per section 5.11 with specific alterations indicated

herein. The CTA requires modeling the product line's frame cross-sections with the best, mid and worst center-of-glazing (COG) assemblies to establish trendline points and using only a default low and default high spacer system to develop two product trendlines for each product grouping, described further in 5.12.5.1. Any individual product options, within their respective product grouping, U-factor can be determined within these two trendline boundaries.

When the individual product options do not meet the CTA requirements for trendline generation these option(s) shall be simulated per section 4.3.1.

5.12.5.1 Categorizing Product Options for a Trendline

All of the product line's individual product options shall be separated into product groupings per a combination of the characteristics listed below.

A trendline will be created for each product grouping with the following characteristics:

A. Nominal IGU accommodations;

(changes in nominal IGU width or main frame changes to accommodate the IGU)

NOTE: Nominal IGU width may be comprised of characteristic options containing different glass and gap thickness. Products with secondary sash or panel, energy panel, or storm panel fall into a separate trendline category.

Interior surface low-e glass can be within the same trendline for U-factor ratings only. To determine CI per ANSI/NFRC 500, separate CI trendlines would be required for products with and without interior surface low-e glass.

B. Number of glazing layers (e.g. double glazed IGU, triple glazed IGU);

C. Grids or true divided lites;

D. Dynamic glazing products, and;

E. Any product changes per Section 4.2.2, which have not been grouped per Section 4.2.4.

5.12.5.2 Establishing Trendline U_{cog} Points

The development of a trendline per section 5.12.5.1, will establish the individual glazing options and results in a minimum of two trendlines for each product grouping.

A. Determining Trendline Point Glazing Options

This section explains the process to establish the three points used for the trendlines.

A product grouping with less than three glazing options shall not be permitted to use the CTA.

- i. The trendlines for each product grouping shall be established with three (3) points: the two endpoints and one midpoint.
- ii. Glazing (i.e., center-of-glass) options for the endpoints shall be the best and worst performing (U_{c-min} and U_{c-max} , respectively) options; the same endpoints shall be used for both the spacer trendlines.
 - (a) The U_{c-max} shall be constructed using only clear glass layer(s) and use an air-filled gap.
 - (b) The U_{c-min} shall be the best center-of-glass option and at a minimum include a low-e glass layer.
- iii. Glazing selection for each trendline COG midpoint (U_{c-mid}) shall be the individual option with the closest U_{cog} to the average of the U_{c-min} and U_{c-max} . For trendlines where there are only three glazing options, these three options will be used for the points (e.g. U_{c-min} , U_{c-mid} , and U_{c-max}).

B. Establishing Trendline Spacer Systems

It is required to use two default spacer systems when using the CTA to establish the minimum two trendlines required; the spacer system composition and geometry shall be based on a solid material with 13mm (0.50") height and the conductivity set to:

- i. Default low spacer system conductivity = 0.01 W/m-K (0.006 Btu/h-ft-F)
- ii. Default high spacer system conductivity = 10.0 W/m-K (5.8 Btu/h-ft-F)

5.12.5.3 Development of a Trendline

For each category established in 5.12.5.1, trendlines shall be generated from the three U_{cog} points selected in

5.12.5.2.A and the two default spacer systems in
5.12.5.2.B.

- A. Each of the U_{cog} glazing configurations (U_{c-min} , U_{c-mid} , and U_{c-max}) shall be simulated with the product grouping frame and the high default spacer system and the low default spacer system to generate six total product U-factor ratings.
- B. The total product U-factor ratings U_{tot} is plotted against the vertical (Y) axis with the glazing configurations U_{cog} plotted against the horizontal (X) axis to generate two trendlines.
 - i. Trendline U_b = total product U-factor trendline using the low default spacer system
 - ii. Trendline U_w = total product U-factor trendline using the high default spacer system
- C. The linear equation coefficients, Slope, Intercept, and R^2 values, will be computed from the modeling results for each trendline.
 - i. The slope and intercept coefficients define the trendline and are used to calculate U_{tot} from U_{cog} .
 - ii. The R^2 coefficient of determination is a measure of the linearity of the trendline points. Its value shall be greater than 0.980.
- D. If the trendline's R^2 evaluation does not meet linearity standards of 0.980, the results shall require the re-simulation of the existing points or the re-grouping of the trendline per 5.12.5.1.

5.12.6 Default and Specific Spacer Systems

The CTA methodology requires each spacer system performance to be provided in terms of effective conductivity, k_{eff} when calculating total product U-Factor after Trendline U_w and Trendline U_b are generated. A default or specific spacer system shall be used to calculate the total product performance ratings. The spacer system consists of the spacer component, desiccant, and any applicable sealants and specified sealant thickness / height.

5.12.6.1 Default Spacer System

The default spacer system contains a spacer component and default sealant(s) geometry and is based on a default total height of 13mm (0.50”).

The default spacer system k_{eff} to be used is found in Table 5-10 and is based on the composition and shape of the spacer within the spacer system. In the event a spacer contains two metals, the higher conductivity metal shall be used in specifying the spacer system class, regardless of the amount of that metal present in the spacer.

Table 5-10 – Default Spacer System Performance

Spacer System Class	Spacer System Class k_{eff} W/m-K (Btu/h-ft-F)	Spacer Composition (Highest Conductivity)	Spacer Shape
Class 1	8.0 (4.6)	Aluminum	Box Spacer
Class 2	3.0 (1.7)	Mild Steel	Box Spacer
Class 3	1.0 (0.58)	Stainless Steel	Box Spacer
		Aluminum or Mild Steel	Hybrid, Composite, U-shaped, or Thermal Break Spacer
		Glass solder/seal glass (pure)	Any
Class 4	0.5 (0.29)	Non-metallic	Any
		Stainless Steel	Hybrid, Composite, U-shaped, or Thermal Break Spacer

The following definitions apply for Table 5-10:

- Box spacers have a hollow cross-sectional profile with two members that traverse from one side to the other side.
- Hybrid spacers have a geometry similar to a box spacer but have metal present on only one side-to-side path and use a separate, low conductance material <0.5 W/m-K to complete the spacer profile, forming the second side-to-side path.
- Composite spacers have a solid cross-section, and for the purposes of Table 5-10 have no more than one metal member that traverses from one side to the other side.

- U-shaped spacers have a cross-sectional profile with only one member that traverses from one side to the other side.
- Thermal Break spacers have an insulating bridge <0.52 W/m-K of at least 1.6mm connecting two metal profiles.
- Metalized polymer materials (a polymer substrate with a vacuum deposited metal layer) are considered non-metallic for this categorization.
- Mild Steel can be galvanized, tin-plated, etc.

5.12.6.2 Specific Spacer Systems

The Specific spacer system contains detailed and specific sealant(s), geometry, and based on the specific spacer system nominal height.

Determining the k_{eff} of the spacer system:

- Composition and geometry shall be based on the drawings and the bill of materials supplied by the spacer manufacturer;
- Modeled by a LEAFF certified simulator with an NFRC accredited simulation laboratory (ASL) in accordance with the NFRC Simulation Manual and reviewed and authorized by an NFRC licensed inspection agency (IA) ;
- Every unique spacer system type and size shall obtain a k_{eff} or follow this simplification method to obtain k_{eff} . For simplification, spacer system trendlines may be generated so all configurations do not require individual modeling. This is accomplished by modeling the widest spacer system, mid-width spacer system, and narrowest spacer system for all unique spacer system types determined in 5.12.5.1. These spacer system points will be used to generate spacer system trendlines, for each specific spacer system, and allow for the effective conductivity (k_{eff}) determination of any width spacer system between endpoints selected;
 - The nominal height of the spacer system must be identical for the points used to generate spacer system trendlines;
 - The spacer system k_{eff} from the corresponding spacer systems are plotted against the vertical (Y) axis with the spacer system width plotted against the horizontal (X) axis.

5.12.7 Total Fenestration Product U-factor Rating

This section defined the calculation to determine the total product U-factor for each individual option within a product grouping using the CTA approach.

5.12.7.1 U-Factor Range Determination

The total U-Factor for the low default (U_b) and high default (U_w) spacer systems for an individual glazing option in the product grouping shall be determined using the center-of-glass U-factor (U_{cog}) and the two U-factor trendlines, determined in 5.12.5.3.

Equation 5-6:

$$U_w = Intercept_w + Slope_w \times U_{cog}$$

Equation 5-7:

$$U_b = Intercept_b + Slope_b \times U_{cog}$$

Where:

U_w = U-factor using the default high spacer system trendline

U_b = U-factor using the default low spacer system trendline

U_{cog} = individual glazing options center-of-glass U-factor

5.12.7.2 Total U-factor (U_{tot})

To determine the total product U-factor (U_{tot}) for the individual glazing option is determined using Equation 5-8.

Equation 5-8:

$$U_{tot} = U_b + \frac{(U_w - U_b) \cdot (\ln(k_{eff}) - \ln(k_{eff}b))}{\ln(k_{eff}w) - \ln(k_{eff}b)}$$

Where:

U_w = U-factor using the default high spacer system trendline and the individual glazing option center-of-glass U-factor

U_b = U-factor using the default low spacer system trendline and the individual glazing option center-of-glass U-factor

U_{tot} = total product U-factor for the individual glazing option

k_{eff} = use either a Default or Specific spacer system conductivity

- (i) Default k_{eff} for the spacer system per Section 5.12.6.1; or
- (ii) Specific k_{eff} for the specific spacer system option k_{eff} per Section 5.12.6.2.
- (iii) k_{eff} is limited between k_{effb} and k_{effw}

k_{effb} = k_{eff} of low default spacer system from trendline U_b

k_{effw} = k_{eff} of high default spacer system from trendline U_w

The U-factor of a fenestration product may vary by size. In order to provide a uniform rating procedure, as well as size specific information, the CTA as described in this section shall be used as the primary method. For the comparison rating of commercial fenestration systems, the U-factor rating for model size per Table 4-3 is calculated. U-factor ratings for sizes other than model size can be calculated for informational purposes when applicable. The projected frame depth (PFD) is required for calculation of specified sizes; refer to Appendix A Aspect Ratio Calculation.

5.12.8 Reporting Simulation Results

See NFRC 701.03 – Reporting Requirements.

5.12.9 Validation Testing

The baseline product option selected per Section 4.2.6 criteria shall be modeled and shall be an option in the commercial trendline.

The following conditions apply:

- A. Test specimen size and configuration shall be as defined in Table 4-3.
- B. All test specimens shall be tested without removable screens, removable grilles and trims, or any other applied devices;
- C. All test specimens shall be tested in the vertical position. For determining validation of the baseline product only, skylights,

and other sloped glazing products shall be simulated in a vertical position;

- D. The test specimen shall not be modified by the testing laboratory, except as allowed in Reference 1 for sealing against air leakage and as required by this section;
- E. The product is validated if the baseline product has a tested U-factor which meets the equivalence criteria in Table 4-4 when simulated in accordance with Section 5.12.5.

5.12.10 Calculating Individual Product Options to Existing Trendlines

Calculation of new individual product options where the categorization falls within the existing trendline range, shall be permitted to use the existing trendlines.

6. REFERENCES

- 1) *NFRC 102-2023: Procedure for Measuring the Steady-State Thermal Transmittance of Fenestration Systems*. National Fenestration Rating Council: Greenbelt, MD; 2014. www.nfrc.org.
- 2) *NFRC THERM7 / WINDOW7 Simulation Manual*. National Fenestration Rating Council: Greenbelt, MD. www.nfrc.org.
- 3) *List of Approved Simulation Computer Programs*. National Fenestration Rating Council: Greenbelt, MD. www.nfrc.org.
- 4) ASTM Standard C 1363, 2019, "Standard Test Method for the Thermal Performance of Building Assemblies by Means of a Hot Box Apparatus," ASTM International, West Conshohocken, PA, 2005, DOI: 10.1520/C1363-11, www.astm.org.
- 5) ASTM SI10 – 02 IEEE, 2002, "American National Standard for use of the International System of Units (SI): The Modern Metric System. (Replaces ASTM E 380), ASTM International, West Conshohocken, PA, 2002. www.astm.org.
- 6) ASTM Standard C 1036, 2006. "Standard Specification for Flat Glass," ASTM International, West Conshohocken, PA, 2006, DOI: 10.1520/C1036-06. www.astm.org.
- 7) *ASHRAE Handbook—Fundamentals* American Society of Heating, Refrigerating, and Air-Conditioning Engineers: Atlanta, GA, 2009. www.astm.org.
- 8) ANSI/DASMA 105-2017. *Test Method for Thermal Transmittance and Air Infiltration of Garage Doors*. American National Standards Institute: West Conshohocken, PA; Door & Access Systems Manufacturers' Association: Cleveland, OH, 2004. www.dasma.com www.ansi.org
- 9) ISO 15099. *Thermal Performance of Windows, Doors and Shading Device—Detailed Calculations*. International Organization for Standardization: Geneva, Switzerland. www.iso.org. 2003.
- 10) Curcija DC, Bhandari MS, Manteghi M, Shah BV. "Component Modeling Methodology for Predicting Thermal Performance of Non-Residential Fenestration Systems," Thermal Performance of Building Envelopes IX, Clearwater, FL. December 2004.

- 11) *NFRC 304-2023: Creating an Applied Film Layer in Optics for NFRC Certification*. National Fenestration Rating Council: Greenbelt, MD. www.nfrc.org.
- 12) Curcija DC. "Proposed Methodology for Modeling Tubular Skylights for NFRC Rating Purposes." CEERE Technical Report. Center for Energy Efficiency & Renewable Energy, University of Massachusetts Amherst. June 2001. www.ceere.org
- 13) LBNL. Calculation of Optical Properties for a Venetian Blind Type of Shading Device, October 20, 2006. Lawrence Berkeley National Laboratory, Berkeley, CA. <http://windows.lbl.gov/software/window/6/TechnicalDocs.html>
- 14) LBNL. TARCOG: Mathematical Models for Calculation of Thermal Performance of Glazing Systems with or without Shading Devices, October 17, 2006. Lawrence Berkeley National Laboratory, Berkeley, CA. <http://windows.lbl.gov/software/window/6/TechnicalDocs.html>
- 15) Vidanovic, S.; Kohler, C.J.; Curcija, D.C. "Optical Model of Fritted Glazing". LBNL Technical Report. January 25, 2012. Berkeley, CA. <http://windows.lbl.gov/software/window/6/TechnicalDocs.html>
- 16) Curcija, D.C.; Hart, R.G. "Modeling Thermal Performance of VIG: WINDOW and THERM software tools". LBNL Technical Report. Berkeley, CA. [https://windows.lbl.gov/sites/default/files/software/WINDOW/Modeling Thermal Performance of VIG_with Ref.pdf](https://windows.lbl.gov/sites/default/files/software/WINDOW/Modeling%20Thermal%20Performance%20of%20VIG_with%20Ref.pdf)
- 17) Hart, R.H.; and Curcija, D.C. 2013. "Modeling of Vacuum Insulating Glazing." Proceedings of the Thermal Performance of the Exterior Envelopes of Whole Buildings XII International Conference, Clearwater Beach, FL. December 2013.
- 18) *NFRC 600: Glossary and Terminology*. National Fenestration Rating Council: Greenbelt, MD; 2014. www.nfrc.org.

APPENDIX A (NON-MANDATORY INFORMATION)

This section includes methods that can be used to calculate fenestration U-factor performance based on the specified size(s). This data can be used to provide more accurate inputs to building energy simulations to support more effective HVAC equipment sizing and better estimations of peak loads, annual energy use estimations and thermal comfort. These U-factor values shall not be used on NFRC labels, nor shall they be included in the NFRC Certified Products Directory (CPD).

A.1 Determination of Skylight U-factors at Non-Standard Slopes

A U-factor-rating matrix that is slope-specific may be developed in accordance with ANSI/NFRC 100 procedures and requirements. A matrix shall only be developed for those product lines and individual products of a product line that have been submitted to an NFRC-licensed independent certification and Inspection Agency (IA) for certification authorization purposes at the standard 20° slope from horizontal. Products that have previously received certification authorization may also have a matrix developed. Each matrix shall be specific to an individual product and glazing type within a product line.

The matrix shall include the standard slope rating and ratings at other slopes that are defined by the manufacturer.

Calculation shall use the following Convective Surface Heat Transfer Coefficients, for any of the listed slopes:

Table A-2: Convective Surface Heat Transfer Coefficients, h_c , in for Skylights at Different Incidence Angles ($W/m^2 \cdot ^\circ K$)

Frame Type	Angle of Incidence from Horizontal (degrees)									
	0	10	15	20	30	45	60	70	85	90
Wood/Vinyl	3.147	3.147	3.095	3.090	3.042	2.798	2.357	2.405	2.441	2.443
T/B AI	4.147	4.147	4.096	4.091	4.043	3.801	3.088	2.953	2.997	2.999
TI AI	4.373	4.373	4.322	4.317	4.270	4.029	3.316	3.071	3.117	3.120
AI	4.710	4.710	4.659	4.654	4.606	4.366	3.657	3.244	3.292	3.295

Table A-3: Convective Surface Heat Transfer Coefficients, h_c , in for Skylights at Different Incidence Angles (Btu/h²·ft²·°F)

Frame Type	Angle of Incidence from Horizontal (degrees)									
	0	10	15	20	30	45	60	70	85	90
Wood/Vinyl	0.554	0.554	0.545	0.544	0.536	0.493	0.415	0.424	0.430	0.430
T/B Al	0.730	0.730	0.721	0.720	0.712	0.670	0.544	0.520	0.528	0.528
TI Al	0.770	0.770	0.761	0.760	0.752	0.710	0.584	0.541	0.549	0.549
Al	0.829	0.829	0.821	0.820	0.811	0.769	0.644	0.571	0.580	0.580

Coefficients for any slopes not listed can be calculated using linear interpolation between the two closest angles.

Skylights that are approved for use at slopes within 15° of vertical under the manufacturer's standard instructions may be entitled to dual U-factor ratings. Consult with the NFRC-licensed independent certification and Inspection Agency (IA) for further determination.

Note: Until such time that a certification change is made in the NFRC 700: Product Certification Program, the thermal performance parameters that are determined at slopes other than the standard slope are for informational purposes only.

Table A-4: Skylight U-factors Slope Table (Example Only)

	Roof Slope (degrees above horizontal)						
	0	15	20	40	60	75	85
U-Factor	0.52	0.50	0.49	0.47	0.45	0.43	0.42


Shaded column indicates ANSI/NFRC 100 standard slope ratings for certification purposes.

The values stated (other than the identified standard ratings) in the matrix above are for informational purposes only and have not been authorized for certification. The standard slope ratings are also shown on the label or certificate to which this matrix is attached. For additional information, contact the IA stated on the label certificate.

A.2 Determination of U-factors for Dynamic Glazing Products at additional slat angles

Determination of U-factors for Dynamic Glazing Products with slatted blinds between glass shall be permitted at slat tilt angles other than Fully ON/CLOSED and Fully OFF/OPEN. Additional slat angles of -45° and $+45^\circ$ shall also be permitted as optional ratings that may be added to the CPD.

See figure below for angle descriptions.

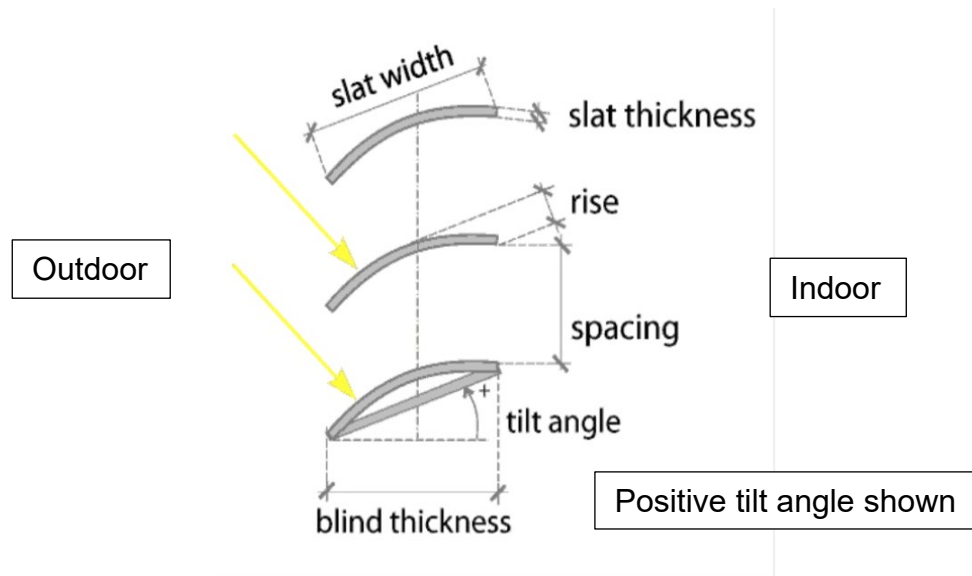

A.3 Determination of U-factor at Specified Sizes using Aspect Ratio Calculation

The U-factor of a fenestration product may vary by size. In order to provide a uniform rating procedure for the comparison of fenestration systems, total product U-factor rating is calculated for the model size per Table 4-3.

Specified size U-factors can be calculated for informational purposes. All products in Table 4-3 except greenhouse/garden windows, non-full lite side-hinged exterior doors (single or double), non-full lite sidelites, non-full lite transoms, garage (vehicular access)/rolling doors, tubular daylighting devices, and spandrel panel systems can be calculated using the procedures outline in Section 4.6.3, and if applicable, Section 5.11 and Section 5.12. Total product U-factor results for the specified size product can be calculated from Equation 1 and Equation 2.

Equation 1:

$$U_{f-NFRC} = \frac{(U_{t-NFRC} * A_{pf-NFRC}) - (U_{c-NFRC} * A_{c-NFRC}) - (U_{e-NFRC} * A_{e-NFRC}) - (U_{d-NFRC} * A_{d-NFRC}) - (U_{de-NFRC} * A_{de-NFRC})}{A_{f-NFRC}}$$

Where:

U_{t-NFRC} = total product U-factor for the individual glazing option at model size per Table 4-3

U_{c-NFRC} = individual glazing options center-of-glass U-factor

U_{d-NFRC} = individual glazing option divider U-Factor, assumed to equal U_c

U_{e-NFRC} = individual glazing option edge-of-glazing U-factor, assumed to be equal to U_c

$U_{de-NFRC}$ = individual glazing option edge-of-divider U-factor, assumed to be equal to U_c

$A_{pf-NFRC}$ = total projected fenestration product area at model size per Table 4-3

A_{c-NFRC} = center-of-glazing vision area at model size per Table 4-3

A_{d-NFRC} = divider area at model size per Table 4-3

A_{e-NFRC} = individual glazing option edge-of-glazing area

$A_{de-NFRC}$ = individual glazing option edge-of-divider area

A_{f-NFRC} = frame area at model size per Table 4-3

Assume:

$$U_{c-NFRC} = U_{d-NFRC} = U_{e-NFRC} = U_{de-NFRC}$$

$$A_{g-NFRC} = \text{Total glazing area} = A_{c-NFRC} + A_{d-NFRC} + A_{e-NFRC} + A_{de-NFRC}$$

Then Equation 1 becomes:

Equation 1.1

$$U_{f-NFRC} = \frac{(U_{t-NFRC} * A_{pf-NFRC}) - (U_{c-NFRC} * A_{g-NFRC})}{A_{f-NFRC}}$$

Equation 1.2

$$A_{pf-NFRC} = W * H$$

Where:

W = width of the model size from Table 4.3 (mm)

H = height of the model size from Table 4.3 (mm)

- 1) When the projected frame height (PFD) of each modeled section is known and A_f can be calculated:

Equation 1.3

$$A_{g-NFRC} = A_{pf-NFRC} - A_{f-NFRC}$$

- 2) When the projected frame height (PFD) is not known an average projected frame height ($\overline{H}_{fr}$) shall be calculated and used to determine A_g , A_c , and A_f shall be calculated based on A_c as follows:

Equation 1.4

$$A_{c-NFRC} = \frac{VT_{t-NFRC} * A_{pf-NFRC}}{VT_{c-NFRC}}$$

Where:

VT_{t-NFRC} = total product visible light transmission for the individual glazing option at model size per Table 4-3.

VT_{c-NFRC} = individual glazing options center-of-glass visible light transmission

VT_{f-NFRC} is assumed to be zero

For Rectangular Products:

Equation 1.5

$$\overline{H}_{fr} = \frac{(2 * W + 2 * H - E) - \sqrt{(2 * W + 2 * H - E)^2 - 16 * ((W * H) - A_{c-NFRC} - D)}}{8}$$

Where:

Equation 1.6

$$A_{g-NFRC} = (W - 2 * \overline{H}_{fr}) * (H - 2 * \overline{H}_{fr})$$

Equation 1.7

$$A_{d-NFRC} = D - (E * \overline{H_{fr}})$$

Equation 1.8

$$D = (W * H_d * N_h + H * H_d * N_v - H_d^2 * N_h * N_v)$$

Equation 1.9

$$E = (2 * H_d * N_h + 2 * H_d * N_v)$$

For Horizontal two-lite Products:

Equation 1.10

$$\overline{H_{fr}} = \frac{(2 * W + 3 * H - E) - \sqrt{(2 * W + 3 * H - E)^2 - 24 * ((W * H) - A_{c-NFRC} - D)}}{12}$$

Where:

Equation 1.11

$$A_{g-NFRC} = (W - 3 * \overline{H_{fr}}) * (H - 2 * \overline{H_{fr}})$$

Equation 1.12

$$A_{d-NFRC} = D - (E * \overline{H_{fr}})$$

Equation 1.13

$$D = (W * H_d * N_h + H * H_d * N_v - H_d^2 * N_h * N_v)$$

Equation 1.14

$$E = (3 * H_d * N_h + 2 * H_d * N_v)$$

For Vertical two-lite Products

Equation 1.15

$$\overline{H_{fr}} = \frac{(3 * W + 2 * H - E) - \sqrt{(3 * W + 2 * H - E)^2 - 24 * ((W * H) - A_{c-NFRC} - D)}}{12}$$

Where:

Equation 1.16

$$A_{g-NFRC} = (W - 2 * \overline{H_{fr}}) * (H - 3 * \overline{H_{fr}})$$

Equation 1.17

$$A_{d-NFRC} = D - (E * \overline{H_{fr}})$$

Equation 1.18

$$D = (W * H_d * N_h + H * H_d * N_v - H_d^2 * N_h * N_v)$$

Equation 1.19

$$E = (2 * H_d * N_h + 3 * H_d * N_v)$$

Where:

A_{g-NFRC} = visible glass area and the divider area at model size per table 4-3

A_{d-NFRC} = divider area at model size per table 4-3

$\overline{H_{fr}}$ = the average projected frame height for the product

H_d = divider PDF, divider < 1" H_d = 19mm, divider ≥ 1" H_d = 38mm

N_h = number of horizontal dividers in rated product

N_v = number of vertical dividers in rated product

Equation 1.20

$$A_{f-NFRC} = A_{pf-NFRC} - A_{g-NFRC}$$

Assume:

$$U_{f-NFRC} = U_{f\text{-specified size}}$$

$$U_{c-NFRC} = U_{c\text{-specified size}}$$

Equation 2:

$$U_{t\text{-specified size}} = \frac{(U_{f\text{-specified size}} * A_{f\text{-specified size}}) + (U_c * A_{g\text{-specified size}})}{A_{pf\text{-specified size}}}$$

Where:

$U_{t\text{-specified size}}$ = total product U-factor for the individual glazing option at the specified size

$U_{f\text{-specified size}}$ = frame U-factor for the specified size product

U_c = individual glazing options center-of-glass U-factor

$A_{f\text{-specified size}}$ = frame area at the specified size

$A_{g\text{-specified size}}$ = vision and divider area at specified size

$A_{pf\text{-specified size}}$ = total projected fenestration product area
at the specified size

Equation 2.1

$$A_{pe\text{-specified size}} = W' * H'$$

Where:

H' = height of the specified size product (mm)

W' = width of the specified size product (mm)

- 1) When the projected frame height (PFD) of each modeled section is known and $A_{f\text{-specified size}}$ can be calculated:

Equation 2.2

$$A_{g\text{-specified size}} = A_{pf\text{-specified size}} - A_{f\text{-specified size}}$$

- 2) When the projected frame height (PFD) is not known $A_{g\text{-specified size}}$ shall be calculated based on the average projected frame height ($\overline{H_{fr}}$) and $A_{f\text{-specified size}}$ shall be calculated based on $A_{g\text{-specified size}}$ as follows:

For Rectangular Products

Equation 2.3

$$A_{g\text{-specified size}} = (W' - 2 * \overline{H_{fr}}) * (H' - 2 * \overline{H_{fr}})$$

For Horizontal Two-lite Products

Equation 2.4

$$A_{g\text{-specified size}} = (W' - 3 * \overline{H_{fr}}) * (H' - 2 * \overline{H_{fr}})$$

For Vertical Two-lite Products

Equation 2.5

$$A_{g\text{-specified size}} = (W' - 2 * \overline{H_{fr}}) * (H' - 3 * \overline{H_{fr}})$$

Equation 2.6

$$A_{f\text{-specified size}} = A_{pf\text{-specified size}} - A_{g\text{-specified size}}$$

INDEX

A

Accreditation Program.....ii
air 16
Air Leakage i, ii
Area.....59, 94, 100, 101, 116, 117
 Projected Fenestration Product Area52
Assembler 6
Attachment 95

B

Base Profile 30, 34
baseline product 7
Baseline Product 42
Bead 28
Blackbody..... 7

C

Calibration Transfer Standard 7
caming..... 8
Caming 33, 34
CAP ii
CAR..... ii
Center-of-Glazing ..32, 34, 43, 47, 132,
 138, 139, 146, 147
Certified Products Directory ii
cladding..... 8
Cladding 129
Compliance and Monitoring Program .ii
Condensation Resistance i
 CR ii
CTS 7
Curb 92
curtain wall 9
Curtain Wall..... 106

D

decorative panel 9

Diffuse.....9
divider 10
Divider..... 34, 37, 56, 69, 70
Door
 Composite 71, 73
 Garage 100, 101, 103
 leaf 10
 Sliding Glass 58
 Wood..... 75, 80
dual action window..... 11
Dynamic Attachment..... 108
Dynamic Glazing 26
Dynamic Glazing Product 26

E

Emissivity 12

F

Fenestration 23, 34, 39, 42, 46, 47, 48,
 51, 54, 130, 139, 147
Film 138, 146
frame..... 12
Frame27, 28, 30, 34, 71, 73, 77, 79, 83,
 84, 85, 86, 87, 89, 126, 128, 129, 130,
 131, 132

G

glass 13
Glass..... 122
Glazing28, 34, 47, 48, 69, 70, 109, 130
 Sloped 130
glazing/glazing in-fill..... 13
greenhouse/garden window 14
Group Leader..... 34, 127, 128, 129
grouping 14
Grouping 32, 34, 35

H

Head 80
horizontal sliding window 14
Hybrid Tubular Daylighting Device... 96

I

IAv

Independent Certification and Inspection
Agency

IAi, ii

Individual Product 23, 26, 28, 29, 34, 58,
61, 62, 92, 93, 97, 106, 113, 132, 148

Insulating Glass Unit 37

J

Jamb 80

L

Laboratory Accreditation Program... i, ii

LAP i, ii

Lite 15, 83

M

Model Size 44, 45, 46

Mullion

Integral 131

N

NFRC Label ii, 8

O

OAVA 16

obscure glass 16

opaque in-fill systems 16

Operator Type 106, 131

outdoor air ventilator assembly 16

P

panel area 5

panel insert 9

PCP 15

Product Certification Authorization 8

Product Certification Program . i, ii, 155

PCP i, ii

Product Line 16, 23, 26, 28, 30, 34, 39,
58, 60, 61, 91, 92, 96, 106, 113, 123,
130, 131, 132

Product Type 30, 45, 130

R

Radiation 16

Rating 25, 26, 37, 58, 64, 92, 95, 97, 108,
114, 130, 131, 134, 151, 154

Rating System i, ii, 17

Reference fenestration product 17

Reference Fenestration Product 134

Reference frame 17

Reference glazing system 17

representative size 17

Representative Size 23, 24

Responsible Party 8

roof window 22

S

sash 17

Sash 27, 30, 34

Sealant 17, 125

Sidelite

Slab 62

sight line 18

Sightline 28, 41, 49

Sill 62, 81

site-Built Products 18

Slab 62

sliding glass door 18

sloped glazing 19

Spacer 35, 123

Spandrel 45, 120, 130

Sunroom 107

sunroom/solarium 19

surface heat transfer coefficient 20

T

Temporary Label v

Thermal Conductivity 20

thermal transmittance 21

Thermal Transmittance 107, 130

thermally broken (TB) members 20

thermally improved (TI) members 20

total fenestration product area 6

transom 21

tubular daylighting device 21

Tubular Daylighting Device .. 92, 94, 95

U

U-factor

Center-of-glazing 34, 138, 146

Total Fenestration Product 34, 46, 137,
145

V

validation matrix 22
Validation Testing..... 123
vertical sliding window 22
Visible Transmittancei

VT i, ii

W

Weatherstrip.....23
Window 106, 135, 143
 Fixed 134, 141
 Wall 106
Wood 73, 75, 80, 129