



April 10, 2018

Design Memorandum No. 2018.02

TO: All DPW Engineering and Construction Staff, and Consultants

**THRU: Melody Park, PE
Chief Engineer
Department of Public Works**


**FROM: Mark H. Zwoyer, PE
Administrator – Engineering Design
Department of Public Works**

**RE: Repair to Edge of Pavement Drop-offs with
Resurface Projects**

EFFECTIVE: Immediately

In areas of resurface projects without existing curbs, an undistributed quantity of Compacted Aggregate, No.53 shall be included for repair of drop-offs. The designers shall include a quantity equal to 3 tons per 100 feet of centerline, unless more precise data is available.



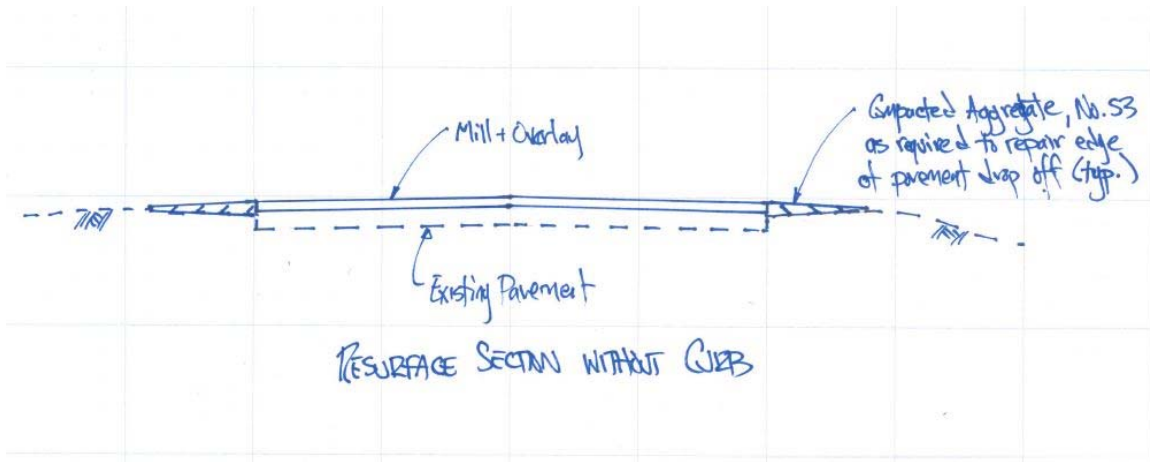

The finished slope of the compacted aggregate should be as gentle as practical; 4 to 1 is a preferable maximum slope.